


**Jefferson Wastewater Treatment Plant
Clarifier Improvements - Phase 2**

Village of Jefferson, OH

WPCLF & OPWC FUNDED

July 2026

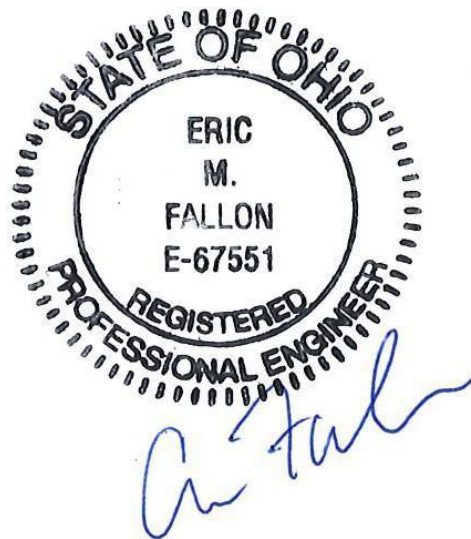

241530PH2

VILLAGE OF JEFFERSON OFFICIALS

ADMINISTRATION

Steven Sekanina, Mayor

Andria Manor, Administrator

Patty Fisher, Clerk/Treasurer

Jason L. Fairchild, Solicitor

William Hitchcock, Streets Department Supervisor

Gary Licate, Wastewater Superintendent

Chris Mackensen, Chief of Police

COUNCIL

Nick Belden

Pat Bradek

Lon Damon

Steve Febel

Karen Roderick

Jennifer Skinner

ADVERTISEMENT FOR BIDS/PUBLIC NOTICE TO BIDDERS

Sealed bids will be received by the Village of Jefferson, 27 East Jefferson Street, Jefferson, Ohio 44047 until 12:00 p.m. on August 13, 2026 and will be opened and read immediately thereafter for the

JEFFERSON WASTEWATER TREATMENT PLANT CLARIFIER IMPROVEMENTS - PHASE 2

WPCLF & OPWC FUNDED

OPINION OF PROBABLE CONSTRUCTION COST: \$590,000.00

COMPLETION DATE: 18 MONTHS FROM NOTICE TO PROCEED

The bid specifications, drawings, plan holders list, addenda, and other bid information (**but not the bid forms**) may be viewed and/or downloaded for free via the internet at <https://bids.verdantas.com>. The bidder shall be responsible to check for Addenda and obtain same from the web site.

Bids must be in accordance with drawings and specifications and on forms available from Verdantas LLC at a non-refundable cost of One Hundred Twenty-Five 00/100 Dollars (\$125.00) for hard copies **and Forty-Five Dollars (\$45.00) for electronic files**. Documents may be ordered by registering and paying online at <https://bids.verdantas.com>. Please contact planroom@verdantas.com or call (440) 530-2351 if you encounter any problems viewing, registering, or paying for the documents.

This project will be funded by the Water Pollution Control Loan Fund Program as administered by the Ohio Environmental Protection Agency and the Ohio Water Development Authority. The Contractor shall note that there are Disadvantaged Business Enterprise participation goals for this project.

This procurement is subject to the EPA policy on encouraging the participation of small business in rural areas (SBRAs).

OHIO PREFERENCE: In accordance with Ohio Rev. Code §164.05 (A)(6), to the extent practicable, the Prime Contractor and subcontractor shall use Ohio products, materials, services, and labor in connection with this project.

STEEL PRODUCTS MADE IN THE UNITED STATES:

Domestic steel use requirements as specified in Ohio Rev. Code §153.011, <https://codes.ohio.gov/ohio-revised-code/section-153.011>, apply to this project.
(Load-bearing structural purposes only)

Publish: *Star Beacon*
July 30, 2026
August 6, 2026

TABLE OF CONTENTS

	<u>Page No.</u>
Title Page	i
Officials Page	ii
Advertisement for Bids/Public Notice to Bidders	iii
Table of Contents	iv - vi
SECTION 1 <u>BID DOCUMENTS AND BID FORMS</u>	
Instructions to Bidders	BD.1 – BD.8
Prices to Include	BD.9
<u>**ALL BID FORMS SHALL BE COMPLETED AND SUBMITTED WITH BID**</u>	
Form of Non-Collusion Affidavit	BF.1
Corporate Resolution	BF.2
Proposed Subcontractors	BF.3
Experience Record	BF.4
Insurance Agent Affidavit	BF.5
Supplemental Bond Acknowledgement	BF.6
Bid Security	BF.7
Proposal Forms	BF.8 – BF.9
EEO Certification	BF.EPA.1
Debarment Form 5700-49	BF.EPA.2
MBE/WBE Data Sheet I	BF.EPA.3
OPWC Proposal Notes and EEO Certification	OPWC.BF.1 – OPWC.BF.4
SECTION 2 <u>CONTRACT FORMS</u>	
Notice of Award	CF.1
Contract and Certificates of Fiscal Officer & Legal Counsel	CF.2 – CF.3
Contract Bond, Certificates of Insurance & Worker's Comp.	CF.4
Delinquent Personal Property Statement	CF.5
Lobbying Affidavit	CF.6
Approved Subcontractors	CF.7
Notice to Proceed	CF.8
MBE/WBE Form 1A – 6100-3 Proposed MBE/WBE Subcontractor*	CF.EPA.4 - CF.EPA.5
* To be signed by Bidder & Proposed Subcontractor – attach MBE/WBE Certificate	
MBE/WBE Form 1B – 6100-4 MBE/WBE Subcontractor List**	CF.EPA.6 - CF.EPA.7
** Summary of All Subcontractors to be signed by Bidder	
American Iron & Steel Acknowledgement	CF.EPA.8
Findings for Recovery & Notifications	N.1
SECTION 3 <u>GENERAL CONDITIONS, EJCDC No. C-700 (2007)</u>	1 – 68
SECTION 4 <u>SUPPLEMENTARY CONDITIONS</u>	SC.1 – SC.7

SECTION 5 SPECIFICATIONS

DIVISION 1 - GENERAL REQUIREMENTS

011000	SUMMARY
012500	SUBSTITUTION PROCEDURES
013000	ADMINISTRATIVE REQUIREMENTS
013216	CONSTRUCTION PROGRESS SCHEDULE
013233	PHOTOGRAPHIC DOCUMENTATION
013236	VIDEO MONITORING AND DOCUMENTATION
013300	SUBMITTAL PROCEDURES
013319	FIELD TEST REPORTING
014000	QUALITY REQUIREMENTS
015000	TEMPORARY FACILITIES AND CONTROLS
016000	PRODUCT REQUIREMENTS
017000	EXECUTION AND CLOSEOUT REQUIREMENTS
017800	FINAL COMPLIANCE AND SUBMITTALS

DIVISION 2 – EXISTING CONDITIONS

024119	SELECTIVE DEMOLITION
--------	----------------------

DIVISION 3 – CONCRETE

030000	CONCRETE WORK
030000.02	EXPANSION AND CONSTRUCTION JOINTS
030130	CONCRETE REHABILITATION

DIVISION 5 - METALS

055200	ALUMINUM HANDRAILS
055300	ALUMINUM FLOOR GRATING

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

071116	CONCRETE WATERPROOFING
079200	JOINT SEALANTS
079200.02	CAULKING AND SEALANTS

DIVISION 9 - FINISHES

099700	SPECIAL COATINGS
--------	------------------

DIVISION 40 – PROCESS INTEGRATION

400593	COMMON MOTOR REQUIREMENTS FOR PROCESS EQUIPMENT
--------	---

**DIVISION 43 - PROCESS GAS AND LIQUID HANDLING,
PURIFICATION AND STORAGE EQUIPMENT**

432359 SREW PUMPS

DIVISION 46 - WATER AND WASTEWATER EQUIPMENT

464321 CIRCULAR CLARIFIER EQUIPMENT

	<u>Page No.</u>
SECTION 6 <u>STANDARD SPECIFICATIONS</u>	SS.1
SECTION 7 <u>SPECIFIC PROJECT REQUIREMENTS</u>	SR.1 – SR.2
SECTION 8 <u>SPECIAL REQUIREMENTS – EPA</u>	
WPCLF & WSRLA Projects – Contract Document Provisions	SR.EPA.1 – 4
MBE/WBE Utilization	SR.EPA.5 –
	SR.EPA.8
Violating Facilities	SR.EPA.9
SBRA	SR.EPA.10
Local Protest Procedure	SR.EPA.11
Continuous Treatment Provisions	SR.EPA.12
WPCLF/WSRLA Payments	SR.EPA.13
WPCLF/WSRLA Contract Change Order	SR.EPA.14 –
	SR.EPA.15
Build America, Buy America	SR.EPA.16 –
	SR.EPA.36
Buy American Requirements for Iron and Steel Products	SR.EPA.37 –
	SR.EPA.69
Prohibition on Telecommunications and Video Surveillance	SR.EPA.70 –
	SR.EPA.71
SECTION 9 <u>PREVAILING WAGE RATES</u>	
Davis-Bacon Wage Rate Requirements	DB.1 – DB.10
Payroll Form, Fringe Benefit Statement & Employee Notification	DB.11 – DB.22
Davis-Bacon Prevailing Wage Schedule	

SECTION 1
BID DOCUMENTS

INSTRUCTIONS TO BIDDERS

PART 1 GENERAL

- 1.1 Sealed bids shall be received by the Owner at the location specified and until the time and date specified in the Advertisement for Bids/Public Notice to Bidders.
- 1.2 Each bid shall contain the full name and address of each person or company interested in said bid. If no other person be so interested, the Bidder shall distinctly so state the fact.
- 1.3 Bid forms must be completed in ink or by typewriter. Any corrections to the bid forms prior to submission must be initialed by the person signing the bid. Failure to submit any bid form(s) or other required document(s) may be cause for rejection of the bidder's bid at the sole discretion of the Owner.
- 1.4 Bids by Corporations must be executed in the corporate name by the President, Vice President, or other officer accompanied by evidence of authority to sign and the corporate seal must be affixed and attested by the Secretary on the Corporate Resolution form.
- 1.5 Bids by partnerships must be executed in the partnership name and signed by a partner, whose title must appear under the signature.
- 1.6 All names must be typed or printed below the signature.
- 1.7 The bid shall contain an acknowledgment of receipt of all Addenda.
- 1.8 If a Bidder wishes to withdraw their bid prior to the opening of bids, they shall state their purpose in writing to the Owner before the time fixed for the opening, and when reached it shall be handed to them unread.
- 1.9 After the opening of bids, no Bidder may withdraw his bid for a period of 90 days.**

PART 2 EXAMINATION OF CONTRACT DOCUMENTS AND SITE

- 2.1 Before submitting a bid, each Bidder must
 - A. Examine the Contract Documents thoroughly.
 - B. Visit the site to familiarize themselves with local conditions that may in any manner affect cost, progress, or performance of the work.
 - C. Familiarize themselves with Federal, State, and local laws, ordinances, rules, and regulations that may in any manner affect cost, progress, or performance of the work.
 - D. Study and carefully correlate Bidder's observations with the Contract Documents.

- 2.2 Reference is made to the Specific Project Requirements for the identification of any reports of investigations and tests of subsurface and latent physical conditions at the site or otherwise affecting cost, progress or performance of the work which have been relied upon by the Engineer in preparing the drawings and specifications. Owner will make copies of such reports available to any Bidder requesting them if not made available with the bid documents. These reports are not guaranteed as to accuracy or completeness; nor are they part of the Contract Documents. Before submitting their bid each Bidder will, at their own expense, make such additional investigations and tests as the Bidder may deem necessary to determine their bid for performance of the work in accordance with the time, price and other terms and conditions of the Contract Documents.
- 2.3 Upon request, the Owner will provide each Bidder access to the site to conduct such reasonable investigations and tests as each Bidder deems necessary for submission for their bid.
- 2.4 The lands upon which the work is to be performed, rights-of-way for access thereto, and other lands designated for use by Bidder in performing the work are identified on the Drawings.
- 2.5 The submission of a bid will constitute an incontrovertible representation by the Bidder that they have complied with every requirement of this section and that the Contract Documents are sufficient in scope and detail to indicate and convey understanding of all terms and conditions for performance of the work.

PART 3 ESTIMATED QUANTITIES

- 3.1 In Unit Price Contracts, the quantities of the work itemized in the bid are approximate only and the bidders are hereby notified that the estimated quantities made by the Engineer are merely for the guidance of the Owner in comparing on a uniform basis all bids received for the work.
- 3.2 The contract quantities, where itemized, are based on plan horizontal and vertical dimensions unless otherwise specified. It is the Contractor's responsibility to verify and determine actual quantities of materials such as pipe, pavement, subgrade, etc. in their ordering materials.
- 3.3 Payments, except for lump sum contracts and except for lump sum items in unit price contracts, will be made to the Contractor only for the actual quantities of work performed or materials furnished in accordance with the plans and specifications.
- 3.4 The successful Bidder will be required to furnish the Owner with a complete breakdown of the lump sum bid items, to the satisfaction of the Engineer/Architect, before signing the Contract documents.

PART 4 CONTRACTOR'S QUALIFICATION

- 4.1 Bidder shall provide detailed information relating to similar projects completed within the past 5 years which demonstrates the bidder's capability, responsibility, experience, skill, and financial standing to undertake this type of project and shall include a list of all projects currently under construction including status and contact person.
- 4.2 Bidder shall own, have rental or lease agreements for, or otherwise have readily available any and all equipment and tools necessary for proper execution of the work. The Owner reserves the right to request lists of equipment or tools available for the project including sources.
- 4.3 Bidder shall provide pertinent information to the Owner relative to any pending suits or outstanding liens. If no information is provided by the Bidder, the Owner shall assume that any such suits or liens do not exist.
- 4.4 The Owner may require similar information on any or all subcontractors proposed by the Bidder.
- 4.5 Bids of corporations not chartered in the state in which the work will take place must be accompanied by proper certification that the corporation is authorized to do business in that state.

PART 5 SUBCONTRACTORS

- 5.1 The Bidder shall state on the appropriate bid form the names of all Subcontractors, Sub Consultants and other professional service providers proposed and the items of work they are to be assigned. All work not assigned to a Subcontractor shall be assumed by the Owner to be performed by the Bidder.
- 5.2 The Owner reserves the right to approve all subcontractors proposed by the Bidder. If the Owner, after due investigation, rejects the use of a proposed subcontractor, the apparent successful Bidder may either submit an acceptable substitution without increase in bid price or decline substitution and withdraw their bid without sacrificing their bid security. Any listed subcontractor to whom the Owner does not make written objection prior to award of contract, shall be deemed acceptable to the Owner.
- 5.3 Requests for changes of Subcontractor by the Bidder after the award shall be subject to the Owner's approval and shall not change the contract bid prices.
- 5.4 No contractor shall be required to employ any Subcontractor, person or organization against whom they have reasonable objection.

PART 6 BID REVIEW BY OWNER

- 6.1 The Owner reserves the right to reject any and all bids, to waive as an informality any and all irregularities, and to disregard all nonconforming, nonresponsive or conditional bids.

- 6.2 All extensions and totals of unit prices and quantities submitted as part of the bid shall be considered informal until verified by the Owner. All bids must be made on the forms contained herein and the bid prices must be written therein, in figures only. Unit prices shall be separately written for "Unit Price Labor," "Unit Price Material," and "Total Unit Price" for each item listed. Should an error in addition and/or multiplication be determined while checking the Contractor's math and verifying their total bid, the "Unit Price Labor" and the "Unit Price Material" figures shall govern in determining the correct "Total Unit Price" and the correct "Item Total."
- 6.3 Each bidder must bid on all Items, Alternates, Deductions, and Additions contained in the Bidding Forms. All bids not in conformity with this notice may be considered non-responsive and may be rejected.
- 6.4 More than one bid for the same work from an individual or entity under the same of different names will not be considered. Reasonable grounds for believing that any bidder has an interest in more than one bid for the work may be cause for disqualification of that bidder and the rejection of all bids in which the bidder has an interest. A subcontractor or supplier is not a bidder, and may submit prices to multiple bidders.
- 6.5 In evaluating bids, the Owner may consider:
- A. The qualifications and experience of the Bidder, proposed subcontractors, and principal material suppliers as outlined in the plans and specifications.
 - B. Financial ability and soundness of the Bidder and proposed subcontractors.
 - C. Completeness of all bid forms and bid requirements.
 - D. Alternates and unit prices requested in the Bid Forms.
 - E. Unit prices or schedules of values that are or appear to be unbalanced.
 - F. Previous contractual experience with the Owner.
 - G. Whether or not the bid package complies with the prescribed requirements.
 - H. The proposed completion date, if applicable.
 - I. Any other matter allowed by law or local ordinance or resolution.
- 6.6 Owner may conduct further investigations as they deem necessary to assist in the evaluation of any bid and to establish the responsibility, qualifications, and financial ability of the Bidder, proposed Subcontractors, and other persons and organizations to do the work in accordance with the Contract Documents to Owner's satisfaction within the prescribed time.
- 6.7 Owner reserves the right to reject the bid of any Bidder who does not pass any such evaluation to Owner's satisfaction.

- 6.8 The Contract award shall be based on the lowest and best bid or lowest responsive and responsible bid (as applicable for the public contracting agency receiving bids) for the base bid and selected alternate items (if any) for this project.

PART 7 BID SECURITY

- 7.1 Each bid must be accompanied by a certified or cashier's check in the amount of 10% of the amount bid, an irrevocable letter of credit in the amount of 10% of the amount bid or an original bond in the amount of 100% of the amount bid per O.R.C. Sections 153.54 and 153.571. The certified or cashier's check, or irrevocable letter of credit shall be from a financial institution authorized to transact business in the State of Ohio and acceptable to the Owner. The bond shall be underwritten by a Surety Company authorized to transact business in the State of Ohio having an Ohio agent and listed on the most current Department of the Treasury Circular 570, "Surety Companies Acceptable on Federal Bonds." The bond shall be a "Bid Guarantee and Contract Bond" ("rollover bond") per O.R.C. Sections 153.54 and 153.571 submitted for the full amount of the bid **including all alternates**, if any.

If bid security is made by bond, the Bidder and their Surety shall sign the Supplemental Bond Acknowledgement form and submit with their bid.

- 7.2 The certified or cashier's check, irrevocable letter of credit, or bond shall be made payable to the Owner and shall serve as a guarantee that in the event the bid is accepted and a contract is awarded to the successful Bidder, the contract will be executed by the bidder including any certifications, certificates or additional bonds required by the contract.
- 7.3 Failure on the part of the successful Bidder to execute the contract documents will cause the certified or cashier's check, irrevocable letter of credit, or bond to be forfeited to the Owner as damages.
- A. If the Owner awards the contract without rebidding, the Bidder (and the Surety on their bond if a bond was submitted) shall be liable to the Owner for a penal sum not to exceed the difference between the low bid and the next lowest bidder or 10% of the amount of the bid, whichever is less.
- B. If the Owner does not award the Contract to the next lowest Bidder, but resubmits the project for bidding; the Bidder (and the Surety on their bond if a bond was submitted) shall be liable to the Owner for a penal sum not to exceed the costs in connection with the resubmission of bids or 10% of the amount of the bid, whichever is less.
- 7.4 Checks or letters of credit for bid security of all bidders will be returned in the manner and timeframe stipulated in the O.R.C. Section 153.54 Bid guaranty to be filed with bid.

PART 8 CONTRACT BOND

- 8.1 As security for faithful performance and payment of all obligations under the Contract, the Owner shall require and the successful Bidder shall furnish either:
- A. *If submitted as Bid Security at time of bid:* "Bid Guarantee and Contract Bond" (AKA "rollover bond") per O.R.C. Sections 153.54 and 153.571.
 - B. *If a cashier's check or irrevocable letter of credit is submitted as Bid Security at time of bid:* Contract Bond per O.R.C. Sections 153.54 and 153.57, in the amount of 100% of the Contract Price. The Contractor and their Surety shall sign the Supplemental Bond Acknowledgement form and submit with the Contract forms
- 8.2 The bond shall be underwritten by a Surety Company authorized to transact business in the State of Ohio having an Ohio agent and listed on the most current Department of the Treasury Circular 570, "Surety Companies Acceptable on Federal Bonds."
- 8.3 The contract bond shall cover correction of the work for the period stated in the specifications and the correction period shall start upon Final Acceptance of the entire project and final payment by the Owner.
- 8.4 Nothing in the performance of the Engineer's service to the Owner in connection with this project shall in any way imply any undertaking for the benefit of the successful Bidder, its subcontractor(s), or the surety of any of them.

PART 9 AWARD AND EXECUTION OF CONTRACT

- 9.1 After the Owner's legislative body awards the project, the successful bidder will receive the unsigned contract documents. Within 10 days after their receipt, the successful Bidder shall sign and deliver to the Owner said contract documents including any certifications, certificates, or additional bonds required by the contract.
- 9.2 The Owner shall execute the Contract within 90 days after the day of the bid opening. When necessary and by mutual consent between the Owner and the Successful Bidder, this 90 day period may be extended.**
- 9.2 The date of the Owner's signature on the Contract Agreement shall be the effective contract date.
- 9.3 The Owner shall execute and deliver to the successful Bidder one set of fully executed contract documents.

PART 10 INSURANCE

- 10.1 Verification of limits for public liability, property damage, automobile, Worker's Compensation, or any other insurance required by the provisions of this Contract must be submitted to the Owner prior to execution of the Contract.
- 10.2 All insurance shall be endorsed so that it cannot be cancelled for non-payment of premium for 10 days or cancelled or non-renewed for any other reason in less than 30

days after a written notice of such proposed action by the insurer is given to the Owner. The cancellation clause on the Certificate(s) of Insurance shall read as specified in the Supplementary Conditions and failure to submit an insurance certificate and/or policy endorsement verifying same shall be reason for the Owner to consider the Contractor non-responsive in complying with the requirements for contract execution and may be cause for forfeiture of the Bid Security to Owner.

- 10.3 The Insurer's affording coverage shall be authorized to transact business in the State of Ohio and be listed on the most current Ohio Department of Insurance list of Ohio Licensed Companies.
- 10.4 The Contractor's Liability Insurance policy(s) shall be endorsed such that limits are on a Per Project basis.
- 10.5 The Contractor shall also provide an Owner's and Contractor's Protective Policy.

PART 11 NON-COLLUSION AFFIDAVIT

- 11.1 Collusion between bidders will be cause for rejection of affected bids and may be cause for rejection of all bids. Multiple bids submitted by one bidder under the same name or different names, whether as an individual, firm, partnership, corporation, profit or non-profit, affiliate, or association will be cause for rejection of bids. A subcontractor is not a bidder, and may submit prices to multiple bidders.
- 11.2 All bidders shall submit an affidavit that their bid is genuine and not collusive or sham; that such bidder has not colluded, conspired, connived, or agreed, directly or indirectly, with any bidder or person, to put in a sham bid, or that such other bidder or person shall refrain from bidding; that such bidder has not in any manner, directly or indirectly sought by agreement or collusion, or communication or conference, with any person, to fix the bid price of affiant or any other bidder, or to fix any overhead, profit or cost element of said bid price, or of that of any other bidder, or to secure any advantage against the Owner or any person or persons interested in the proposed contract; that such bidder is the only party (or parties) who has an interest with the bidder in the profits of any contract which may result from the herein contained proposal; that no individual affiliated with the Owner, including but not limited to the head of any department, any employee, or any other official or officer of the Owner, is or will be directly or indirectly interested in this bid, and/or the profits from this bid if successful; that no individual affiliated with the Owner, including but not limited to the head of any department, any employee, or any other official or officer of the Owner, has or will receive anything of value as a result of the submission of this bid or its award; that no individual affiliated with the Owner, including but not limited to the head of any department, any employee, or any other official or officer of the Owner, has been solicited to provide assistance and/or provided assistance to the bidder which might give the bidder a competitive advantage or circumvent the competitive bidding process; and that all statements contained in said proposal are true; and further, that such bidder has not, directly or indirectly submitted this bid, or the contents thereof, or divulged information or data relative thereto to any association or to any member or agent thereof.

- 11.3 Each bid must be accompanied by a completed Noncollusion Affidavit provided within the contract documents.
- 11.4 Where there is reason to believe collusion or combination among bidders exists, the Owner reserves the right to reject the bid of those concerned.

PART 12 DELINQUENT PERSONAL PROPERTY STATEMENT

- 12.1 Included with the contract documents is a Delinquent Personal Property Statement to be filled out by the successful Bidder.
- 12.2 The statement shall be sent to both the County Auditor and the County Treasurer. A signed copy shall remain in the contract documents as well.

PART 13 ORIGINAL DOCUMENTS

- 13.1 All bid forms, contract forms, bonds and any other bid documents or contract documents requiring signatures shall be submitted with original signatures. No photo copies or faxed copies of signed documents shall be accepted.

PART 14 ADDENDA

- 14.1 The bidder shall be responsible to obtain Addenda from the web at <https://bids.verdantas.com>.

END OF SECTION 01/28/26

PRICES TO INCLUDE

PART 1 – GENERAL

Any work shown on the plans or required in the specification but not paid for separately as a bid item shall be included in the cost of other bid items. The amount bid shall include the following:

- 1.1 All labor, materials, tools, equipment and transportation necessary for the proper execution of the work in accordance with Contract Documents.
- 1.2 All assistance required by the Engineer to verify compliance with the Contract Documents, including measuring for final pay quantities.
- 1.3 Project coordination and scheduling.
- 1.4 Detailed breakdown of lump sum bid items as requested by the Engineer.
- 1.5 All provisions necessary to protect workmen, the general public and property along the work in accordance with the Contract Documents and OSHA requirements.
- 1.6 Protection and/or replacement of existing property corner monuments.
- 1.7 Record drawings.
- 1.8 Mobilization.
- 1.9 Reimbursement to Owner for costs for re-inspection or re-testing of any work not installed in compliance with the Contract Documents.
- 1.10 All provisions included as described or implied in this Prices to Include Section for each Bid Item listed.
- 1.11 Material testing.
- 1.12 Preconstruction Videotaping.
- 1.13 Bonds and insurances and/or endorsements required to fully comply with and adhere to the Contract specifications.
- 1.14 Completion and execution of all work shown, specified, or implied regardless of specific mention of such work in this section herein. Costs for all work items not specifically mentioned herein shall be included in the related items bid.

PART 2 – ITEMS

2.1 GENERAL CONSTRUCTION

The lump sum bid price shall include furnishing of all labor, equipment, and materials necessary for the proper completion of all work associated with the replacement of mechanisms in the existing Clarifier No. 1 and associated control panels, the RAS pumps and associated control panels, and Clarifier No. 1 structural repairs. This includes, but is not limited to, the removal and disposal of existing mechanisms and existing RAS pumps, installation of new mechanisms and new RAS pumps, all required attachments and hardware, testing and commissioning of new installation, and all incidental work required to ensure the proper function of the clarifiers as specified, shown on the Contract Drawings, or required for the proper completion of the work.

Payment will be made in accordance with an approved schedule of values and agreed percent of completion of the scheduled work.

BID FORMS

The bid forms are not available online. The bid forms are available only by purchasing a set of plans and specifications at the location indicated in the Advertisement for Bids/Public Notice to Bidders.

SECTION 2
CONTRACT FORMS

NOTICE OF AWARD

TO: «ContractName»
«ContractAddr»
«ContractCity», «ContractState» «ContractZip»

DATE: _____

PROJECT: «TitleCaps»

You are notified that your Bid which was opened on «Bidopening» has been accepted for items in the amount of «ContractDollars» at the unit bid prices as reflected in the bid tabulation contained herein for the *(fill in awarded parts, i.e. for Base Bid and Alternate C, or delete)*.

You are required by the Instructions to Bidders to execute the Agreement and furnish the required Bonds, Certificates of Insurance, and other documents within 10 calendar days from the date of receipt of this Notice.

Failure to comply with these conditions within the time specified will entitle Owner to consider your Bid in default, to annul this Notice and to declare your Bid Security forfeited.

The Owner will return to you one (1) fully signed set of the contract documents.

«OwnerCaps»

«OwnerCEOFirst» «OwnerCEOLast», «OwnerCEOTitle»

ACKNOWLEDGMENT

«ContractCAPName»

«ContractFirst» «ContractLast», «ContractTitle»

CONTRACT

FOR «TitleCaps»

THIS CONTRACT, made and entered into at «OwnerCity», «OwnerState», this _____ day of _____, 20____, by and between the «OwnerMuni» (“OWNER”), «OwnerState» and «ContractName» (“CONTRACTOR”).

WITNESSETH: That the said CONTRACTOR has agreed and by this presents does agree with the OWNER for the consideration hereinafter mentioned and contained, and under penalty expressed in a bond given with these presents, and herein contained or hereunto annexed, to furnish at its own cost and expense, all the necessary tools, equipment, materials, labor, and tests in an expeditious, substantial and workmanlike manner, the equipment and appurtenances herein contemplated, commencing work within 20 days from the date of the Notice to Proceed and executing the work within the time and in the manner specified and in conformity with the requirements set forth in this Contract.

The following form essential parts of the Contract (may vary with project).

1. Advertisement for Bids/Public Notice to Bidders
2. Instruction to Bidders
3. Bid Forms and Proposal
4. Contract Forms and Exhibits
5. Contract Bond – ORC 153.571 or ORC 153.57
6. Contract Provisions
7. General Conditions
8. Supplementary Conditions
9. Specifications
10. Specific Project Requirements
11. Prevailing Wage Rate Schedule
12. Contract Drawings; if any.
13. Addenda; if any.

The CONTRACTOR agrees and understands that the work on this contract shall be subject to the acceptance of the OWNER based upon and in accordance with the contract specifications and contract plans and drawings on file in the office of the OWNER.

The CONTRACTOR agrees that each individual employed by the CONTRACTOR or any Subcontractor and engaged in work on the project under this contract shall be paid by prevailing wage established by the Department of Industrial Relations of the State of Ohio or the U.S. Department of Labor (Davis-Bacon Act) as detailed in the section titled "Wage Rates." This shall occur regardless of any contractual relationship which may be said to exist between the Contractor or any Subcontractor and such individual. ***(if a School District, delete this paragraph)***

The CONTRACTOR shall proceed with the said work in a prompt and diligent manner and shall do the several parts thereof. Further the CONTRACTOR shall complete the whole of said work in accordance with the specifications and contract drawings to the satisfaction of the OWNER on or before the time stated, and in default of completion within the time as fixed, the CONTRACTOR shall pay to the OWNER as liquidated damages, an amount equal to «Liquidated», for each and every day (Sundays and legal holidays excepted) the completion of the work may be delayed beyond the date fixed in the manner and as stipulated.

It is hereby mutually agreed that the OWNER is to pay and the CONTRACTOR is to receive, as full compensation for furnishing all materials and labor in building, constructing and testing and in all respect completing the herein described work and appurtenances in the manner and under the conditions herein specified, the prices stipulated in the proposal herein contained or hereto annexed and the total contract sum is «ContractDollars».

This Contract shall be in full force and effect from the date of execution by the OWNER and CONTRACTOR.

IN WITNESS WHEREOF: The OWNER and CONTRACTOR hereunto affixed their signature the day and year first mentioned above.

«ContractCAPName»

«ContractFirst» «ContractLast», «ContractTitle»

«OwnerCaps»

«OwnerCEOFirst» «OwnerCEOLast», «OwnerCEOTitle»

I hereby certify that funds in the amount of «ContractAmtwords» Dollars («ContractDollars») necessary for the foregoing Contract have been appropriated and are in the Treasury, or are in the process of collection, or are available through grants and/or loans from other funding sources.

«OwnerFiscalFirst» «OwnerFiscalLast», «OwnerFiscalTitle»

APPROVED AS TO FORM:

«OwnerLegalName», «OwnerLegalTitle»

**THE CONTRACTOR SHALL FURNISH THE FOLLOWING ITEMS
WITHIN 10 DAYS OF NOTIFICATION OF AWARD:**

- A) **CERTIFICATE OF INSURANCE FOR
CONTRACTOR'S PUBLIC LIABILITY INSURANCE POLICY
AND AUTOMOTIVE INSURANCE POLICY**
Owner, Verdantas LLC, CT Consultants, Inc., Named as Additional Insured

- B) **CERTIFICATE OF INSURANCE FOR
OWNER'S AND CONTRACTOR'S PROTECTIVE POLICY**
Owner Named as Insured (No Additional Insured)

- C) **CERTIFICATE OF WORKER'S COMPENSATION**

- D) **CONTRACT BOND THAT COMPLIES WITH ORC 153.54 AND 153.57**

* D above is not required if a bond complying with ORC 153.54 and 153.571 (rollover bond) was submitted at time of bid.

DELINQUENT PERSONAL PROPERTY STATEMENT

STATE OF _____)
) SS
COUNTY OF _____)

«ContractName», having been awarded a contract by the «OwnerMuni», «OwnerState», hereby affirms under oath, pursuant to Ohio Revised Code Section 5719.042, that at the time the bid was submitted, my company **was / was not (CIRCLE ONE)** charged with delinquent personal property taxes on the General Tax List of Personal Property for «OwnerCounty» County, Ohio.

If such charge for delinquent personal property tax exists on the General Tax List of Personal Property for «OwnerCounty» County, Ohio, the amount of such due and unpaid delinquent taxes, including due and unpaid penalties and interest shall be set forth below.

A copy of this statement shall be transmitted by the Taxing District's Fiscal Officer to the County Treasurer within thirty days of the date it is submitted. A copy of this statement shall also be incorporated into the Contract made between «OwnerMuni», «OwnerState», and «ContractName», and no payment shall be made with respect to any Contract unless such statement has been so incorporated as a part thereof.

Delinquent Personal Property Tax	\$ _____
Penalties	\$ _____
Interest	\$ _____

«ContractCAPName»

«ContractFirst» «ContractLast», «ContractTitle»

Subscribed and sworn to before me this _____ day of _____, 20____.

Notary Public

My Commission Expires: _____

AFFIDAVIT
OF COMPLIANCE WITH OHIO REVISED CODE SECTION 3517.13

STATE OF _____)
) SS
COUNTY OF _____)

_____ being duly sworn deposes and states as follows:

1. I am duly authorized to make the statements contained herein on behalf of _____ (“the Contracting Party”).
2. The Contracting Party is a/an (select one):
 - ☐ Individual, partnership, or other unincorporated business association (including without limitation, a professional association organized under Ohio Revised Code Chapter 1787), estate, or trust
 - ☐ Corporation organized and existing under the laws of the State of _____
 - ☐ Labor organization
3. I hereby affirm that the Contracting Party and each of the individuals specified in R.C. 3517.13(I) (with respect to non-corporate entities and labor organizations) or R.C. 3517.13(J) (with respect to corporations) are in full compliance with the political contribution limitations set forth in R.C. 3517.13(I) and (J), as applicable.
4. I understand that a false representation on this certification will incur penalties pursuant to 3517.992(R).

Affiant further sayeth naught.

By: _____

Title: _____

SWORN TO BEFORE ME and subscribed in my presence this _____ day of _____, 20_____.

Notary Public

My commission expires: _____

APPROVED SUBCONTRACTORS

PROJECT: «TitleCaps»

PRIME CONTRACTOR: «ContractCAPName»

To be filled out by Prime Contractor and signed by Owner.

1. Name: _____
Address: _____
City/State/Zip: _____
Description of Work: _____
Phone: () _____ Amount: \$ _____ % of Contract: _____
EIN# _____ Unique Entity ID# _____
2. Name: _____
Address: _____
City/State/Zip: _____
Description of Work: _____
Phone: () _____ Amount: \$ _____ % of Contract: _____
EIN# _____ Unique Entity ID# _____
3. Name: _____
Address: _____
City/State/Zip: _____
Description of Work: _____
Phone: () _____ Amount: \$ _____ % of Contract: _____
EIN# _____ Unique Entity ID# _____
4. Name: _____
Address: _____
City/State/Zip: _____
Description of Work: _____
Phone: () _____ Amount: \$ _____ % of Contract: _____
EIN# _____ Unique Entity ID# _____

«OwnerCaps»

«OwnerCEOFirst» «OwnerCEOLast», «OwnerCEOTitle»

NOTICE TO PROCEED

Project: «Title»

Owner: «OwnerMuni»
«OwnerAddr»
«OwnerCity», «OwnerState» «OwnerZip»

To: «ContractName»
«ContractAddr»
«ContractCity», «ContractState» «ContractZip»

Date: _____

You are hereby notified to commence work in accordance with the Contract. All work shall be completed by «Completion_Date».

«OwnerCaps»

«OwnerCEOFirst» «OwnerCEOLast», «OwnerCEOTitle»

**Disadvantaged Business Enterprise (DBE) Program
DBE Subcontractor Performance Form**

This form is intended to capture the DBE¹ subcontractor's² description of work to be performed and the price of the work submitted to the prime contractor. An EPA Financial Assistance Agreement Recipient must require its prime contractor to have its DBE subcontractors complete this form and include all completed forms in the prime contractors bid or proposal package.

Subcontractor Name		Project Name	
Bid/ Proposal No.	Assistance Agreement ID No. (if known)	Point of Contact	
Address			
Telephone No.		Email Address	
Prime Contractor Name		Issuing/Funding Entity:	

Contract Item Number	Description of Work Submitted to the Prime Contractor Involving Construction, Services , Equipment or Supplies	Price of Work Submitted to the Prime Contractor
DBE Certified By: ☐ ODOT ☐ DAS/EDGE ☐ Other: _____		Meets/ exceeds EPA certification standards? ☐ YES ☐ NO ☐ Unknown

Check Which One Applies: _____ MBE _____ WBE (Include MBE/WBE Certificates, No DBE Certs)

¹ A DBE is a Disadvantaged, Minority, or Woman Business Enterprise that has been certified by an entity from which EPA accepts certifications as described in 40 CFR 33.204-33.205 or certified by EPA. EPA accepts certifications from entities that meet or exceed EPA certification standards as described in 40 CFR 33.202.

² Subcontractor is defined as a company, firm, joint venture, or individual who enters into an agreement with a contractor to provide services pursuant to an EPA award of financial assistance.

FORM 6100-3 (DBE Subcontractor Performance Form)

**Disadvantaged Business Enterprise (DBE) Program
DBE Subcontractor Performance Form**

I certify under penalty of perjury that the forgoing statements are true and correct. Signing this form does not signify a commitment to utilize the subcontractors above. I am aware of that in the event of a replacement of a subcontractor, I will adhere to the replacement requirements set forth in 40 CFR Part 33 Section 33.302 I.

Prime Contractor Signature	Print Name
Title	Date

Subcontractor Signature	Print Name
Title	Date

**Disadvantaged Business Enterprise (DBE) Program
DBE Subcontractor Utilization Form**

This form is intended to capture the prime contractor's actual and/or anticipated use of identified certified DBE¹ subcontractors² and the estimated dollar amount of each subcontract. An EPA Financial Assistance Agreement Recipient must require its prime contractors to complete this form and include it in the bid or proposal package. Prime contractors should also maintain a copy of this form on file.

Prime Contractor Name		Project Name	
Bid/ Proposal No.	Assistance Agreement ID No. (if known)	Point of Contact	
Address			
Telephone No.		Email Address	
Issuing/Funding Entity:			

I have identified potential DBE certified subcontractors	☐ YES ☐ NO		
If yes, please complete the table below. If no, please explain:			
Subcontractor Name/ Company Name	Company Address/ Phone/ Email	Est. Dollar Amt.	Currently DBE Certified?

Continue on back if needed

¹ A DBE is a Disadvantaged, Minority, or Woman Business Enterprise that has been certified by an entity from which EPA accepts certifications as described in 40 CFR 33.204-33.205 or certified by EPA. EPA accepts certifications from entities that meet or exceed EPA certification standards as described in 40 CFR 33.202.

² Subcontractor is defined as a company, firm, joint venture, or individual who enters into an agreement with a contractor to provide services pursuant to an EPA award of financial assistance.

**Disadvantaged Business Enterprise (DBE) Program
DBE Subcontractor Utilization Form**

I certify under penalty of perjury that the forgoing statements are true and correct. Signing this form does not signify a commitment to utilize the subcontractors above. I am aware of that in the event of a replacement of a subcontractor, I will adhere to the replacement requirements set forth in 40 CFR Part 33 Section 33.302 I.

Prime Contractor Signature	Print Name
Title	Date

AMERICAN IRON AND STEEL ACKNOWLEDGEMENT

The Contractor acknowledges to and for the benefit of the _____ (“Purchaser”) and the State of Ohio (the “State”) that it understands the goods and services under this Agreement are being funded with monies made available by the Clean Water State Revolving Fund and/or Drinking Water State Revolving Fund that have statutory requirements commonly known as “American Iron and Steel;” that requires all of the iron and steel products used in the project to be produced in the United States (“American Iron and Steel Requirement”) including iron and steel products provided by the Contractor pursuant to this Agreement. The Contractor hereby represents and warrants to and for the benefit of the Purchaser and the State that (a) the Contractor has reviewed and understands the American Iron and Steel Requirement, (b) all of the iron and steel products used in the project will be and/or have been produced in the United States in a manner that complies with the American Iron and Steel Requirement, unless a waiver of the requirement is approved, and (c) the Contractor will provide any further verified information, certification or assurance of compliance with this paragraph, or information necessary to support a waiver of the American Iron and Steel Requirement, as may be requested by the Purchaser or the State. Notwithstanding any other provision of this Agreement, any failure to comply with this paragraph by the Contractor shall permit the Purchaser or State to recover as damages against the Contractor any loss, expense, or cost (including without limitation attorney’s fees) incurred by the Purchaser or State resulting from any such failure (including without limitation any impairment or loss of funding, whether in whole or in part, from the State or any damages owed to the State by the Purchaser). While the Contractor has no direct contractual privity with the State, as a lender to the Purchaser for the funding of its project, the Purchaser and the Contractor agree that the State is a third-party beneficiary and neither this paragraph (nor any other provision of this Agreement necessary to give this paragraph force or effect) shall be amended or waived without the prior written consent of the State.

Signature

Date

Name and Title of Authorized Signatory, Please Print or Type

Bidder’s Firm

- ☐ Check here if the WPCLF or WSRLA applicant will be requesting an individual waiver for non-American made iron and steel products. Please note that the waiver box does not need to be marked for nationwide waivers.

THE OWNER OR THEIR AUTHORIZED REPRESENTATIVE SHALL INSERT THE FOLLOWING CONTRACT DOCUMENTATION IN THE EXECUTED CONTRACT:

A) FINDINGS FOR RECOVERY – ORC 9.24
(<http://ffr.ohioauditor.gov/>)

B1) CHECK FOR DEBARRED CONTRACTORS IN THE STATE OF OHIO
(<https://www.sos.state.oh.us/records/debarred-contractors/>)

**B2) CHECK FEDERAL SAM (System for Award Management) for
FEDERAL FUNDING (including sub-contractors), (if applicable)**
(<https://www.sam.gov/SAM/>)

**C) NOTIFICATION OF SURETY AND AGENT OF CONSTRUCTION
CONTRACT AWARD – ORC 9.32 (if applicable)**

**D) NOTIFICATION TO UTILITY COMPANIES OF COMMENCEMENT
OF CONTRACT EXECUTION – ORC 153.64 (if applicable)**

SECTION 3
GENERAL CONDITIONS

This document has important legal consequences; consultation with an attorney is encouraged with respect to its use or modification. This document should be adapted to the particular circumstances of the contemplated Project and the controlling Laws and Regulations.

STANDARD GENERAL CONDITIONS OF THE CONSTRUCTION CONTRACT

Prepared by

ENGINEERS JOINT CONTRACT DOCUMENTS COMMITTEE

and

Issued and Published Jointly by



AMERICAN COUNCIL OF ENGINEERING COMPANIES

ASSOCIATED GENERAL CONTRACTORS OF AMERICA

AMERICAN SOCIETY OF CIVIL ENGINEERS

PROFESSIONAL ENGINEERS IN PRIVATE PRACTICE

A Practice Division of the

NATIONAL SOCIETY OF PROFESSIONAL ENGINEERS

Endorsed by



CONSTRUCTION SPECIFICATIONS INSTITUTE

These General Conditions have been prepared for use with the Suggested Forms of Agreement Between Owner and Contractor (EJCDC C-520 or C-525, 2007 Editions). Their provisions are interrelated and a change in one may necessitate a change in the other. Comments concerning their usage are contained in the Narrative Guide to the EJCDC Construction Documents (EJCDC C-001, 2007 Edition). For guidance in the preparation of Supplementary Conditions, see Guide to the Preparation of Supplementary Conditions (EJCDC C-800, 2007 Edition).

Copyright © 2007 National Society of Professional Engineers
1420 King Street, Alexandria, VA 22314-2794
(703) 684-2882
www.nspe.org

American Council of Engineering Companies
1015 15th Street N.W., Washington, DC 20005
(202) 347-7474
www.acec.org

American Society of Civil Engineers
1801 Alexander Bell Drive, Reston, VA 20191-4400
(800) 548-2723
www.asce.org

Associated General Contractors of America
2300 Wilson Boulevard, Suite 400, Arlington, VA 22201-3308
(703) 548-3118
www.agc.org

The copyright for this EJCDC document is owned jointly by the four EJCDC sponsoring organizations and held in trust for their benefit by NSPE.

STANDARD GENERAL CONDITIONS OF THE CONSTRUCTION CONTRACT

TABLE OF CONTENTS

	Page
Article 1 – Definitions and Terminology	1
1.01 Defined Terms.....	1
1.02 Terminology	5
Article 2 – Preliminary Matters	6
2.01 Delivery of Bonds and Evidence of Insurance.....	6
2.02 Copies of Documents.....	6
2.03 Commencement of Contract Times; Notice to Proceed.....	6
2.04 Starting the Work.....	7
2.05 Before Starting Construction	7
2.06 Preconstruction Conference; Designation of Authorized Representatives	7
2.07 Initial Acceptance of Schedules.....	7
Article 3 – Contract Documents: Intent, Amending, Reuse	8
3.01 Intent.....	8
3.02 Reference Standards.....	8
3.03 Reporting and Resolving Discrepancies.....	8
3.04 Amending and Supplementing Contract Documents.....	9
3.05 Reuse of Documents	10
3.06 Electronic Data.....	10
Article 4 – Availability of Lands; Subsurface and Physical Conditions; Hazardous Environmental Conditions; Reference Points.....	10
4.01 Availability of Lands	10
4.02 Subsurface and Physical Conditions	11
4.03 Differing Subsurface or Physical Conditions.....	11
4.04 Underground Facilities	13
4.05 Reference Points	14
4.06 Hazardous Environmental Condition at Site.....	14
Article 5 – Bonds and Insurance	16
5.01 Performance, Payment, and Other Bonds	16
5.02 Licensed Sureties and Insurers	16
5.03 Certificates of Insurance	16
5.04 Contractor’s Insurance.....	17
5.05 Owner’s Liability Insurance	18
5.06 Property Insurance	18
5.07 Waiver of Rights	20
5.08 Receipt and Application of Insurance Proceeds.....	21

5.09	Acceptance of Bonds and Insurance; Option to Replace	21
5.10	Partial Utilization, Acknowledgment of Property Insurer	21
Article 6 – Contractor’s Responsibilities		22
6.01	Supervision and Superintendence.....	22
6.02	Labor; Working Hours.....	22
6.03	Services, Materials, and Equipment	22
6.04	Progress Schedule	23
6.05	Substitutes and “Or-Equals”	23
6.06	Concerning Subcontractors, Suppliers, and Others.....	25
6.07	Patent Fees and Royalties	27
6.08	Permits.....	27
6.09	Laws and Regulations	27
6.10	Taxes	28
6.11	Use of Site and Other Areas	28
6.12	Record Documents.....	29
6.13	Safety and Protection	29
6.14	Safety Representative.....	30
6.15	Hazard Communication Programs	30
6.16	Emergencies	30
6.17	Shop Drawings and Samples	30
6.18	Continuing the Work.....	32
6.19	Contractor’s General Warranty and Guarantee.....	32
6.20	Indemnification	33
6.21	Delegation of Professional Design Services	34
Article 7 – Other Work at the Site.....		35
7.01	Related Work at Site	35
7.02	Coordination.....	35
7.03	Legal Relationships.....	36
Article 8 – Owner’s Responsibilities.....		36
8.01	Communications to Contractor.....	36
8.02	Replacement of Engineer.....	36
8.03	Furnish Data	36
8.04	Pay When Due	36
8.05	Lands and Easements; Reports and Tests.....	36
8.06	Insurance	36
8.07	Change Orders.....	36
8.08	Inspections, Tests, and Approvals	37
8.09	Limitations on Owner’s Responsibilities	37
8.10	Undisclosed Hazardous Environmental Condition	37
8.11	Evidence of Financial Arrangements	37
8.12	Compliance with Safety Program.....	37
Article 9 – Engineer’s Status During Construction		37
9.01	Owner’s Representative.....	37
9.02	Visits to Site	37

9.03	Project Representative	38
9.04	Authorized Variations in Work	38
9.05	Rejecting Defective Work	38
9.06	Shop Drawings, Change Orders and Payments.....	38
9.07	Determinations for Unit Price Work	39
9.08	Decisions on Requirements of Contract Documents and Acceptability of Work.....	39
9.09	Limitations on Engineer's Authority and Responsibilities	39
9.10	Compliance with Safety Program.....	40
Article 10 –	Changes in the Work; Claims	40
10.01	Authorized Changes in the Work	40
10.02	Unauthorized Changes in the Work	40
10.03	Execution of Change Orders.....	41
10.04	Notification to Surety.....	41
10.05	Claims.....	41
Article 11 –	Cost of the Work; Allowances; Unit Price Work	42
11.01	Cost of the Work	42
11.02	Allowances	45
11.03	Unit Price Work	45
Article 12 –	Change of Contract Price; Change of Contract Times	46
12.01	Change of Contract Price.....	46
12.02	Change of Contract Times	47
12.03	Delays.....	47
Article 13 –	Tests and Inspections; Correction, Removal or Acceptance of Defective Work	48
13.01	Notice of Defects	48
13.02	Access to Work	48
13.03	Tests and Inspections	48
13.04	Uncovering Work.....	49
13.05	Owner May Stop the Work.....	50
13.06	Correction or Removal of Defective Work	50
13.07	Correction Period.....	50
13.08	Acceptance of Defective Work.....	51
13.09	Owner May Correct Defective Work	51
Article 14 –	Payments to Contractor and Completion	52
14.01	Schedule of Values.....	52
14.02	Progress Payments	52
14.03	Contractor's Warranty of Title	55
14.04	Substantial Completion.....	55
14.05	Partial Utilization	56
14.06	Final Inspection.....	56
14.07	Final Payment.....	57
14.08	Final Completion Delayed.....	58
14.09	Waiver of Claims	58

Article 15 – Suspension of Work and Termination	58
15.01 Owner May Suspend Work	58
15.02 Owner May Terminate for Cause	58
15.03 Owner May Terminate For Convenience.....	60
15.04 Contractor May Stop Work or Terminate	60
Article 16 – Dispute Resolution	61
16.01 Methods and Procedures	61
Article 17 – Miscellaneous	61
17.01 Giving Notice	61
17.02 Computation of Times	61
17.03 Cumulative Remedies	62
17.04 Survival of Obligations	62
17.05 Controlling Law	62
17.06 Headings.....	62

ARTICLE 1 – DEFINITIONS AND TERMINOLOGY

1.01 *Defined Terms*

- A. Wherever used in the Bidding Requirements or Contract Documents and printed with initial capital letters, the terms listed below will have the meanings indicated which are applicable to both the singular and plural thereof. In addition to terms specifically defined, terms with initial capital letters in the Contract Documents include references to identified articles and paragraphs, and the titles of other documents or forms.
1. *Addenda*—Written or graphic instruments issued prior to the opening of Bids which clarify, correct, or change the Bidding Requirements or the proposed Contract Documents.
 2. *Agreement*—The written instrument which is evidence of the agreement between Owner and Contractor covering the Work.
 3. *Application for Payment*—The form acceptable to Engineer which is to be used by Contractor during the course of the Work in requesting progress or final payments and which is to be accompanied by such supporting documentation as is required by the Contract Documents.
 4. *Asbestos*—Any material that contains more than one percent asbestos and is friable or is releasing asbestos fibers into the air above current action levels established by the United States Occupational Safety and Health Administration.
 5. *Bid*—The offer or proposal of a Bidder submitted on the prescribed form setting forth the prices for the Work to be performed.
 6. *Bidder*—The individual or entity who submits a Bid directly to Owner.
 7. *Bidding Documents*—The Bidding Requirements and the proposed Contract Documents (including all Addenda).
 8. *Bidding Requirements*—The advertisement or invitation to bid, Instructions to Bidders, Bid security of acceptable form, if any, and the Bid Form with any supplements.
 9. *Change Order*—A document recommended by Engineer which is signed by Contractor and Owner and authorizes an addition, deletion, or revision in the Work or an adjustment in the Contract Price or the Contract Times, issued on or after the Effective Date of the Agreement.
 10. *Claim*—A demand or assertion by Owner or Contractor seeking an adjustment of Contract Price or Contract Times, or both, or other relief with respect to the terms of the Contract. A demand for money or services by a third party is not a Claim.
 11. *Contract*—The entire and integrated written agreement between the Owner and Contractor concerning the Work. The Contract supersedes prior negotiations, representations, or agreements, whether written or oral.

12. *Contract Documents*—Those items so designated in the Agreement. Only printed or hard copies of the items listed in the Agreement are Contract Documents. Approved Shop Drawings, other Contractor submittals, and the reports and drawings of subsurface and physical conditions are not Contract Documents.
13. *Contract Price*—The moneys payable by Owner to Contractor for completion of the Work in accordance with the Contract Documents as stated in the Agreement (subject to the provisions of Paragraph 11.03 in the case of Unit Price Work).
14. *Contract Times*—The number of days or the dates stated in the Agreement to: (i) achieve Milestones, if any; (ii) achieve Substantial Completion; and (iii) complete the Work so that it is ready for final payment as evidenced by Engineer's written recommendation of final payment.
15. *Contractor*—The individual or entity with whom Owner has entered into the Agreement.
16. *Cost of the Work*—See Paragraph 11.01 for definition.
17. *Drawings*—That part of the Contract Documents prepared or approved by Engineer which graphically shows the scope, extent, and character of the Work to be performed by Contractor. Shop Drawings and other Contractor submittals are not Drawings as so defined.
18. *Effective Date of the Agreement*—The date indicated in the Agreement on which it becomes effective, but if no such date is indicated, it means the date on which the Agreement is signed and delivered by the last of the two parties to sign and deliver.
19. *Engineer*—The individual or entity named as such in the Agreement.
20. *Field Order*—A written order issued by Engineer which requires minor changes in the Work but which does not involve a change in the Contract Price or the Contract Times.
21. *General Requirements*—Sections of Division 1 of the Specifications.
22. *Hazardous Environmental Condition*—The presence at the Site of Asbestos, PCBs, Petroleum, Hazardous Waste, or Radioactive Material in such quantities or circumstances that may present a substantial danger to persons or property exposed thereto.
23. *Hazardous Waste*—The term Hazardous Waste shall have the meaning provided in Section 1004 of the Solid Waste Disposal Act (42 USC Section 6903) as amended from time to time.
24. *Laws and Regulations; Laws or Regulations*—Any and all applicable laws, rules, regulations, ordinances, codes, and orders of any and all governmental bodies, agencies, authorities, and courts having jurisdiction.
25. *Liens*—Charges, security interests, or encumbrances upon Project funds, real property, or personal property.
26. *Milestone*—A principal event specified in the Contract Documents relating to an intermediate completion date or time prior to Substantial Completion of all the Work.

27. *Notice of Award*—The written notice by Owner to the Successful Bidder stating that upon timely compliance by the Successful Bidder with the conditions precedent listed therein, Owner will sign and deliver the Agreement.
28. *Notice to Proceed*—A written notice given by Owner to Contractor fixing the date on which the Contract Times will commence to run and on which Contractor shall start to perform the Work under the Contract Documents.
29. *Owner*—The individual or entity with whom Contractor has entered into the Agreement and for whom the Work is to be performed.
30. *PCBs*—Polychlorinated biphenyls.
31. *Petroleum*—Petroleum, including crude oil or any fraction thereof which is liquid at standard conditions of temperature and pressure (60 degrees Fahrenheit and 14.7 pounds per square inch absolute), such as oil, petroleum, fuel oil, oil sludge, oil refuse, gasoline, kerosene, and oil mixed with other non-Hazardous Waste and crude oils.
32. *Progress Schedule*—A schedule, prepared and maintained by Contractor, describing the sequence and duration of the activities comprising the Contractor's plan to accomplish the Work within the Contract Times.
33. *Project*—The total construction of which the Work to be performed under the Contract Documents may be the whole, or a part.
34. *Project Manual*—The bound documentary information prepared for bidding and constructing the Work. A listing of the contents of the Project Manual, which may be bound in one or more volumes, is contained in the table(s) of contents.
35. *Radioactive Material*—Source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 USC Section 2011 et seq.) as amended from time to time.
36. *Resident Project Representative*—The authorized representative of Engineer who may be assigned to the Site or any part thereof.
37. *Samples*—Physical examples of materials, equipment, or workmanship that are representative of some portion of the Work and which establish the standards by which such portion of the Work will be judged.
38. *Schedule of Submittals*—A schedule, prepared and maintained by Contractor, of required submittals and the time requirements to support scheduled performance of related construction activities.
39. *Schedule of Values*—A schedule, prepared and maintained by Contractor, allocating portions of the Contract Price to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

40. *Shop Drawings*—All drawings, diagrams, illustrations, schedules, and other data or information which are specifically prepared or assembled by or for Contractor and submitted by Contractor to illustrate some portion of the Work.
41. *Site*—Lands or areas indicated in the Contract Documents as being furnished by Owner upon which the Work is to be performed, including rights-of-way and easements for access thereto, and such other lands furnished by Owner which are designated for the use of Contractor.
42. *Specifications*—That part of the Contract Documents consisting of written requirements for materials, equipment, systems, standards and workmanship as applied to the Work, and certain administrative requirements and procedural matters applicable thereto.
43. *Subcontractor*—An individual or entity having a direct contract with Contractor or with any other Subcontractor for the performance of a part of the Work at the Site.
44. *Substantial Completion*—The time at which the Work (or a specified part thereof) has progressed to the point where, in the opinion of Engineer, the Work (or a specified part thereof) is sufficiently complete, in accordance with the Contract Documents, so that the Work (or a specified part thereof) can be utilized for the purposes for which it is intended. The terms “substantially complete” and “substantially completed” as applied to all or part of the Work refer to Substantial Completion thereof.
45. *Successful Bidder*—The Bidder submitting a responsive Bid to whom Owner makes an award.
46. *Supplementary Conditions*—That part of the Contract Documents which amends or supplements these General Conditions.
47. *Supplier*—A manufacturer, fabricator, supplier, distributor, materialman, or vendor having a direct contract with Contractor or with any Subcontractor to furnish materials or equipment to be incorporated in the Work by Contractor or Subcontractor.
48. *Underground Facilities*—All underground pipelines, conduits, ducts, cables, wires, manholes, vaults, tanks, tunnels, or other such facilities or attachments, and any encasements containing such facilities, including those that convey electricity, gases, steam, liquid petroleum products, telephone or other communications, cable television, water, wastewater, storm water, other liquids or chemicals, or traffic or other control systems.
49. *Unit Price Work*—Work to be paid for on the basis of unit prices.
50. *Work*—The entire construction or the various separately identifiable parts thereof required to be provided under the Contract Documents. Work includes and is the result of performing or providing all labor, services, and documentation necessary to produce such construction, and furnishing, installing, and incorporating all materials and equipment into such construction, all as required by the Contract Documents.
51. *Work Change Directive*—A written statement to Contractor issued on or after the Effective Date of the Agreement and signed by Owner and recommended by Engineer ordering an

addition, deletion, or revision in the Work, or responding to differing or unforeseen subsurface or physical conditions under which the Work is to be performed or to emergencies. A Work Change Directive will not change the Contract Price or the Contract Times but is evidence that the parties expect that the change ordered or documented by a Work Change Directive will be incorporated in a subsequently issued Change Order following negotiations by the parties as to its effect, if any, on the Contract Price or Contract Times.

1.02 Terminology

A. The words and terms discussed in Paragraph 1.02.B through F are not defined but, when used in the Bidding Requirements or Contract Documents, have the indicated meaning.

B. *Intent of Certain Terms or Adjectives:*

1. The Contract Documents include the terms “as allowed,” “as approved,” “as ordered,” “as directed” or terms of like effect or import to authorize an exercise of professional judgment by Engineer. In addition, the adjectives “reasonable,” “suitable,” “acceptable,” “proper,” “satisfactory,” or adjectives of like effect or import are used to describe an action or determination of Engineer as to the Work. It is intended that such exercise of professional judgment, action, or determination will be solely to evaluate, in general, the Work for compliance with the information in the Contract Documents and with the design concept of the Project as a functioning whole as shown or indicated in the Contract Documents (unless there is a specific statement indicating otherwise). The use of any such term or adjective is not intended to and shall not be effective to assign to Engineer any duty or authority to supervise or direct the performance of the Work, or any duty or authority to undertake responsibility contrary to the provisions of Paragraph 9.09 or any other provision of the Contract Documents.

C. *Day:*

1. The word “day” means a calendar day of 24 hours measured from midnight to the next midnight.

D. *Defective:*

1. The word “defective,” when modifying the word “Work,” refers to Work that is unsatisfactory, faulty, or deficient in that it:
 - a. does not conform to the Contract Documents; or
 - b. does not meet the requirements of any applicable inspection, reference standard, test, or approval referred to in the Contract Documents; or
 - c. has been damaged prior to Engineer’s recommendation of final payment (unless responsibility for the protection thereof has been assumed by Owner at Substantial Completion in accordance with Paragraph 14.04 or 14.05).

E. *Furnish, Install, Perform, Provide:*

1. The word “furnish,” when used in connection with services, materials, or equipment, shall mean to supply and deliver said services, materials, or equipment to the Site (or some other specified location) ready for use or installation and in usable or operable condition.
 2. The word “install,” when used in connection with services, materials, or equipment, shall mean to put into use or place in final position said services, materials, or equipment complete and ready for intended use.
 3. The words “perform” or “provide,” when used in connection with services, materials, or equipment, shall mean to furnish and install said services, materials, or equipment complete and ready for intended use.
 4. When “furnish,” “install,” “perform,” or “provide” is not used in connection with services, materials, or equipment in a context clearly requiring an obligation of Contractor, “provide” is implied.
- F. Unless stated otherwise in the Contract Documents, words or phrases that have a well-known technical or construction industry or trade meaning are used in the Contract Documents in accordance with such recognized meaning.

ARTICLE 2 – PRELIMINARY MATTERS

2.01 *Delivery of Bonds and Evidence of Insurance*

- A. When Contractor delivers the executed counterparts of the Agreement to Owner, Contractor shall also deliver to Owner such bonds as Contractor may be required to furnish.
- B. *Evidence of Insurance:* Before any Work at the Site is started, Contractor and Owner shall each deliver to the other, with copies to each additional insured identified in the Supplementary Conditions, certificates of insurance (and other evidence of insurance which either of them or any additional insured may reasonably request) which Contractor and Owner respectively are required to purchase and maintain in accordance with Article 5.

2.02 *Copies of Documents*

- A. Owner shall furnish to Contractor up to ten printed or hard copies of the Drawings and Project Manual. Additional copies will be furnished upon request at the cost of reproduction.

2.03 *Commencement of Contract Times; Notice to Proceed*

- A. The Contract Times will commence to run on the thirtieth day after the Effective Date of the Agreement or, if a Notice to Proceed is given, on the day indicated in the Notice to Proceed. A Notice to Proceed may be given at any time within 30 days after the Effective Date of the Agreement. In no event will the Contract Times commence to run later than the sixtieth day after the day of Bid opening or the thirtieth day after the Effective Date of the Agreement, whichever date is earlier.

2.04 *Starting the Work*

- A. Contractor shall start to perform the Work on the date when the Contract Times commence to run. No Work shall be done at the Site prior to the date on which the Contract Times commence to run.

2.05 *Before Starting Construction*

- A. *Preliminary Schedules:* Within 10 days after the Effective Date of the Agreement (unless otherwise specified in the General Requirements), Contractor shall submit to Engineer for timely review:
 - 1. a preliminary Progress Schedule indicating the times (numbers of days or dates) for starting and completing the various stages of the Work, including any Milestones specified in the Contract Documents;
 - 2. a preliminary Schedule of Submittals; and
 - 3. a preliminary Schedule of Values for all of the Work which includes quantities and prices of items which when added together equal the Contract Price and subdivides the Work into component parts in sufficient detail to serve as the basis for progress payments during performance of the Work. Such prices will include an appropriate amount of overhead and profit applicable to each item of Work.

2.06 *Preconstruction Conference; Designation of Authorized Representatives*

- A. Before any Work at the Site is started, a conference attended by Owner, Contractor, Engineer, and others as appropriate will be held to establish a working understanding among the parties as to the Work and to discuss the schedules referred to in Paragraph 2.05.A, procedures for handling Shop Drawings and other submittals, processing Applications for Payment, and maintaining required records.
- B. At this conference Owner and Contractor each shall designate, in writing, a specific individual to act as its authorized representative with respect to the services and responsibilities under the Contract. Such individuals shall have the authority to transmit instructions, receive information, render decisions relative to the Contract, and otherwise act on behalf of each respective party.

2.07 *Initial Acceptance of Schedules*

- A. At least 10 days before submission of the first Application for Payment a conference attended by Contractor, Engineer, and others as appropriate will be held to review for acceptability to Engineer as provided below the schedules submitted in accordance with Paragraph 2.05.A. Contractor shall have an additional 10 days to make corrections and adjustments and to complete and resubmit the schedules. No progress payment shall be made to Contractor until acceptable schedules are submitted to Engineer.
 - 1. The Progress Schedule will be acceptable to Engineer if it provides an orderly progression of the Work to completion within the Contract Times. Such acceptance will not impose on Engineer responsibility for the Progress Schedule, for sequencing, scheduling, or progress of

the Work, nor interfere with or relieve Contractor from Contractor's full responsibility therefor.

2. Contractor's Schedule of Submittals will be acceptable to Engineer if it provides a workable arrangement for reviewing and processing the required submittals.
3. Contractor's Schedule of Values will be acceptable to Engineer as to form and substance if it provides a reasonable allocation of the Contract Price to component parts of the Work.

ARTICLE 3 – CONTRACT DOCUMENTS: INTENT, AMENDING, REUSE

3.01 *Intent*

- A. The Contract Documents are complementary; what is required by one is as binding as if required by all.
- B. It is the intent of the Contract Documents to describe a functionally complete project (or part thereof) to be constructed in accordance with the Contract Documents. Any labor, documentation, services, materials, or equipment that reasonably may be inferred from the Contract Documents or from prevailing custom or trade usage as being required to produce the indicated result will be provided whether or not specifically called for, at no additional cost to Owner.
- C. Clarifications and interpretations of the Contract Documents shall be issued by Engineer as provided in Article 9.

3.02 *Reference Standards*

- A. Standards, Specifications, Codes, Laws, and Regulations
 1. Reference to standards, specifications, manuals, or codes of any technical society, organization, or association, or to Laws or Regulations, whether such reference be specific or by implication, shall mean the standard, specification, manual, code, or Laws or Regulations in effect at the time of opening of Bids (or on the Effective Date of the Agreement if there were no Bids), except as may be otherwise specifically stated in the Contract Documents.
 2. No provision of any such standard, specification, manual, or code, or any instruction of a Supplier, shall be effective to change the duties or responsibilities of Owner, Contractor, or Engineer, or any of their subcontractors, consultants, agents, or employees, from those set forth in the Contract Documents. No such provision or instruction shall be effective to assign to Owner, Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, any duty or authority to supervise or direct the performance of the Work or any duty or authority to undertake responsibility inconsistent with the provisions of the Contract Documents.

3.03 *Reporting and Resolving Discrepancies*

- A. *Reporting Discrepancies:*

1. *Contractor's Review of Contract Documents Before Starting Work:* Before undertaking each part of the Work, Contractor shall carefully study and compare the Contract Documents and check and verify pertinent figures therein and all applicable field measurements. Contractor shall promptly report in writing to Engineer any conflict, error, ambiguity, or discrepancy which Contractor discovers, or has actual knowledge of, and shall obtain a written interpretation or clarification from Engineer before proceeding with any Work affected thereby.
2. *Contractor's Review of Contract Documents During Performance of Work:* If, during the performance of the Work, Contractor discovers any conflict, error, ambiguity, or discrepancy within the Contract Documents, or between the Contract Documents and (a) any applicable Law or Regulation, (b) any standard, specification, manual, or code, or (c) any instruction of any Supplier, then Contractor shall promptly report it to Engineer in writing. Contractor shall not proceed with the Work affected thereby (except in an emergency as required by Paragraph 6.16.A) until an amendment or supplement to the Contract Documents has been issued by one of the methods indicated in Paragraph 3.04.
3. Contractor shall not be liable to Owner or Engineer for failure to report any conflict, error, ambiguity, or discrepancy in the Contract Documents unless Contractor had actual knowledge thereof.

B. Resolving Discrepancies:

1. Except as may be otherwise specifically stated in the Contract Documents, the provisions of the Contract Documents shall take precedence in resolving any conflict, error, ambiguity, or discrepancy between the provisions of the Contract Documents and:
 - a. the provisions of any standard, specification, manual, or code, or the instruction of any Supplier (whether or not specifically incorporated by reference in the Contract Documents); or
 - b. the provisions of any Laws or Regulations applicable to the performance of the Work (unless such an interpretation of the provisions of the Contract Documents would result in violation of such Law or Regulation).

3.04 Amending and Supplementing Contract Documents

- A. The Contract Documents may be amended to provide for additions, deletions, and revisions in the Work or to modify the terms and conditions thereof by either a Change Order or a Work Change Directive.
- B. The requirements of the Contract Documents may be supplemented, and minor variations and deviations in the Work may be authorized, by one or more of the following ways:
 1. A Field Order;
 2. Engineer's approval of a Shop Drawing or Sample (subject to the provisions of Paragraph 6.17.D.3); or

3. Engineer's written interpretation or clarification.

3.05 *Reuse of Documents*

- A. Contractor and any Subcontractor or Supplier shall not:
 1. have or acquire any title to or ownership rights in any of the Drawings, Specifications, or other documents (or copies of any thereof) prepared by or bearing the seal of Engineer or its consultants, including electronic media editions; or
 2. reuse any such Drawings, Specifications, other documents, or copies thereof on extensions of the Project or any other project without written consent of Owner and Engineer and specific written verification or adaptation by Engineer.
- B. The prohibitions of this Paragraph 3.05 will survive final payment, or termination of the Contract. Nothing herein shall preclude Contractor from retaining copies of the Contract Documents for record purposes.

3.06 *Electronic Data*

- A. Unless otherwise stated in the Supplementary Conditions, the data furnished by Owner or Engineer to Contractor, or by Contractor to Owner or Engineer, that may be relied upon are limited to the printed copies (also known as hard copies). Files in electronic media format of text, data, graphics, or other types are furnished only for the convenience of the receiving party. Any conclusion or information obtained or derived from such electronic files will be at the user's sole risk. If there is a discrepancy between the electronic files and the hard copies, the hard copies govern.
- B. Because data stored in electronic media format can deteriorate or be modified inadvertently or otherwise without authorization of the data's creator, the party receiving electronic files agrees that it will perform acceptance tests or procedures within 60 days, after which the receiving party shall be deemed to have accepted the data thus transferred. Any errors detected within the 60-day acceptance period will be corrected by the transferring party.
- C. When transferring documents in electronic media format, the transferring party makes no representations as to long term compatibility, usability, or readability of documents resulting from the use of software application packages, operating systems, or computer hardware differing from those used by the data's creator.

ARTICLE 4 – AVAILABILITY OF LANDS; SUBSURFACE AND PHYSICAL CONDITIONS; HAZARDOUS ENVIRONMENTAL CONDITIONS; REFERENCE POINTS

4.01 *Availability of Lands*

- A. Owner shall furnish the Site. Owner shall notify Contractor of any encumbrances or restrictions not of general application but specifically related to use of the Site with which Contractor must comply in performing the Work. Owner will obtain in a timely manner and pay for easements for permanent structures or permanent changes in existing facilities. If Contractor and Owner are unable to agree on entitlement to or on the amount or extent, if any, of any adjustment in the

Contract Price or Contract Times, or both, as a result of any delay in Owner's furnishing the Site or a part thereof, Contractor may make a Claim therefor as provided in Paragraph 10.05.

- B. Upon reasonable written request, Owner shall furnish Contractor with a current statement of record legal title and legal description of the lands upon which the Work is to be performed and Owner's interest therein as necessary for giving notice of or filing a mechanic's or construction lien against such lands in accordance with applicable Laws and Regulations.
- C. Contractor shall provide for all additional lands and access thereto that may be required for temporary construction facilities or storage of materials and equipment.

4.02 *Subsurface and Physical Conditions*

A. *Reports and Drawings:* The Supplementary Conditions identify:

- 1. those reports known to Owner of explorations and tests of subsurface conditions at or contiguous to the Site; and
- 2. those drawings known to Owner of physical conditions relating to existing surface or subsurface structures at the Site (except Underground Facilities).

B. *Limited Reliance by Contractor on Technical Data Authorized:* Contractor may rely upon the accuracy of the "technical data" contained in such reports and drawings, but such reports and drawings are not Contract Documents. Such "technical data" is identified in the Supplementary Conditions. Except for such reliance on such "technical data," Contractor may not rely upon or make any claim against Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors with respect to:

- 1. the completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor, and safety precautions and programs incident thereto; or
- 2. other data, interpretations, opinions, and information contained in such reports or shown or indicated in such drawings; or
- 3. any Contractor interpretation of or conclusion drawn from any "technical data" or any such other data, interpretations, opinions, or information.

4.03 *Differing Subsurface or Physical Conditions*

A. *Notice:* If Contractor believes that any subsurface or physical condition that is uncovered or revealed either:

- 1. is of such a nature as to establish that any "technical data" on which Contractor is entitled to rely as provided in Paragraph 4.02 is materially inaccurate; or
- 2. is of such a nature as to require a change in the Contract Documents; or

3. differs materially from that shown or indicated in the Contract Documents; or
4. is of an unusual nature, and differs materially from conditions ordinarily encountered and generally recognized as inherent in work of the character provided for in the Contract Documents;

then Contractor shall, promptly after becoming aware thereof and before further disturbing the subsurface or physical conditions or performing any Work in connection therewith (except in an emergency as required by Paragraph 6.16.A), notify Owner and Engineer in writing about such condition. Contractor shall not further disturb such condition or perform any Work in connection therewith (except as aforesaid) until receipt of written order to do so.

- B. *Engineer's Review:* After receipt of written notice as required by Paragraph 4.03.A, Engineer will promptly review the pertinent condition, determine the necessity of Owner's obtaining additional exploration or tests with respect thereto, and advise Owner in writing (with a copy to Contractor) of Engineer's findings and conclusions.

C. *Possible Price and Times Adjustments:*

1. The Contract Price or the Contract Times, or both, will be equitably adjusted to the extent that the existence of such differing subsurface or physical condition causes an increase or decrease in Contractor's cost of, or time required for, performance of the Work; subject, however, to the following:
 - a. such condition must meet any one or more of the categories described in Paragraph 4.03.A; and
 - b. with respect to Work that is paid for on a unit price basis, any adjustment in Contract Price will be subject to the provisions of Paragraphs 9.07 and 11.03.
2. Contractor shall not be entitled to any adjustment in the Contract Price or Contract Times if:
 - a. Contractor knew of the existence of such conditions at the time Contractor made a final commitment to Owner with respect to Contract Price and Contract Times by the submission of a Bid or becoming bound under a negotiated contract; or
 - b. the existence of such condition could reasonably have been discovered or revealed as a result of any examination, investigation, exploration, test, or study of the Site and contiguous areas required by the Bidding Requirements or Contract Documents to be conducted by or for Contractor prior to Contractor's making such final commitment; or
 - c. Contractor failed to give the written notice as required by Paragraph 4.03.A.
3. If Owner and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any adjustment in the Contract Price or Contract Times, or both, a Claim may be made therefor as provided in Paragraph 10.05. However, neither Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors shall be liable to Contractor for any claims, costs, losses, or damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other

professionals and all court or arbitration or other dispute resolution costs) sustained by Contractor on or in connection with any other project or anticipated project.

4.04 *Underground Facilities*

A. *Shown or Indicated:* The information and data shown or indicated in the Contract Documents with respect to existing Underground Facilities at or contiguous to the Site is based on information and data furnished to Owner or Engineer by the owners of such Underground Facilities, including Owner, or by others. Unless it is otherwise expressly provided in the Supplementary Conditions:

1. Owner and Engineer shall not be responsible for the accuracy or completeness of any such information or data provided by others; and
2. the cost of all of the following will be included in the Contract Price, and Contractor shall have full responsibility for:
 - a. reviewing and checking all such information and data;
 - b. locating all Underground Facilities shown or indicated in the Contract Documents;
 - c. coordination of the Work with the owners of such Underground Facilities, including Owner, during construction; and
 - d. the safety and protection of all such Underground Facilities and repairing any damage thereto resulting from the Work.

B. *Not Shown or Indicated:*

1. If an Underground Facility is uncovered or revealed at or contiguous to the Site which was not shown or indicated, or not shown or indicated with reasonable accuracy in the Contract Documents, Contractor shall, promptly after becoming aware thereof and before further disturbing conditions affected thereby or performing any Work in connection therewith (except in an emergency as required by Paragraph 6.16.A), identify the owner of such Underground Facility and give written notice to that owner and to Owner and Engineer. Engineer will promptly review the Underground Facility and determine the extent, if any, to which a change is required in the Contract Documents to reflect and document the consequences of the existence or location of the Underground Facility. During such time, Contractor shall be responsible for the safety and protection of such Underground Facility.
2. If Engineer concludes that a change in the Contract Documents is required, a Work Change Directive or a Change Order will be issued to reflect and document such consequences. An equitable adjustment shall be made in the Contract Price or Contract Times, or both, to the extent that they are attributable to the existence or location of any Underground Facility that was not shown or indicated or not shown or indicated with reasonable accuracy in the Contract Documents and that Contractor did not know of and could not reasonably have been expected to be aware of or to have anticipated. If Owner and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any such adjustment in Contract Price

or Contract Times, Owner or Contractor may make a Claim therefor as provided in Paragraph 10.05.

4.05 *Reference Points*

- A. Owner shall provide engineering surveys to establish reference points for construction which in Engineer's judgment are necessary to enable Contractor to proceed with the Work. Contractor shall be responsible for laying out the Work, shall protect and preserve the established reference points and property monuments, and shall make no changes or relocations without the prior written approval of Owner. Contractor shall report to Engineer whenever any reference point or property monument is lost or destroyed or requires relocation because of necessary changes in grades or locations, and shall be responsible for the accurate replacement or relocation of such reference points or property monuments by professionally qualified personnel.

4.06 *Hazardous Environmental Condition at Site*

- A. *Reports and Drawings:* The Supplementary Conditions identify those reports and drawings known to Owner relating to Hazardous Environmental Conditions that have been identified at the Site.
- B. *Limited Reliance by Contractor on Technical Data Authorized:* Contractor may rely upon the accuracy of the "technical data" contained in such reports and drawings, but such reports and drawings are not Contract Documents. Such "technical data" is identified in the Supplementary Conditions. Except for such reliance on such "technical data," Contractor may not rely upon or make any claim against Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors with respect to:
1. the completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences and procedures of construction to be employed by Contractor and safety precautions and programs incident thereto; or
 2. other data, interpretations, opinions and information contained in such reports or shown or indicated in such drawings; or
 3. any Contractor interpretation of or conclusion drawn from any "technical data" or any such other data, interpretations, opinions or information.
- C. Contractor shall not be responsible for any Hazardous Environmental Condition uncovered or revealed at the Site which was not shown or indicated in Drawings or Specifications or identified in the Contract Documents to be within the scope of the Work. Contractor shall be responsible for a Hazardous Environmental Condition created with any materials brought to the Site by Contractor, Subcontractors, Suppliers, or anyone else for whom Contractor is responsible.
- D. If Contractor encounters a Hazardous Environmental Condition or if Contractor or anyone for whom Contractor is responsible creates a Hazardous Environmental Condition, Contractor shall immediately: (i) secure or otherwise isolate such condition; (ii) stop all Work in connection with such condition and in any area affected thereby (except in an emergency as required by

Paragraph 6.16.A); and (iii) notify Owner and Engineer (and promptly thereafter confirm such notice in writing). Owner shall promptly consult with Engineer concerning the necessity for Owner to retain a qualified expert to evaluate such condition or take corrective action, if any. Promptly after consulting with Engineer, Owner shall take such actions as are necessary to permit Owner to timely obtain required permits and provide Contractor the written notice required by Paragraph 4.06.E.

- E. Contractor shall not be required to resume Work in connection with such condition or in any affected area until after Owner has obtained any required permits related thereto and delivered written notice to Contractor: (i) specifying that such condition and any affected area is or has been rendered safe for the resumption of Work; or (ii) specifying any special conditions under which such Work may be resumed safely. If Owner and Contractor cannot agree as to entitlement to or on the amount or extent, if any, of any adjustment in Contract Price or Contract Times, or both, as a result of such Work stoppage or such special conditions under which Work is agreed to be resumed by Contractor, either party may make a Claim therefor as provided in Paragraph 10.05.
- F. If after receipt of such written notice Contractor does not agree to resume such Work based on a reasonable belief it is unsafe, or does not agree to resume such Work under such special conditions, then Owner may order the portion of the Work that is in the area affected by such condition to be deleted from the Work. If Owner and Contractor cannot agree as to entitlement to or on the amount or extent, if any, of an adjustment in Contract Price or Contract Times as a result of deleting such portion of the Work, then either party may make a Claim therefor as provided in Paragraph 10.05. Owner may have such deleted portion of the Work performed by Owner's own forces or others in accordance with Article 7.
- G. To the fullest extent permitted by Laws and Regulations, Owner shall indemnify and hold harmless Contractor, Subcontractors, and Engineer, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to a Hazardous Environmental Condition, provided that such Hazardous Environmental Condition: (i) was not shown or indicated in the Drawings or Specifications or identified in the Contract Documents to be included within the scope of the Work, and (ii) was not created by Contractor or by anyone for whom Contractor is responsible. Nothing in this Paragraph 4.06.G shall obligate Owner to indemnify any individual or entity from and against the consequences of that individual's or entity's own negligence.
- H. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to a Hazardous Environmental Condition created by Contractor or by anyone for whom Contractor is responsible. Nothing in this Paragraph 4.06.H shall obligate Contractor to indemnify any individual or entity from and against the consequences of that individual's or entity's own negligence.

- I. The provisions of Paragraphs 4.02, 4.03, and 4.04 do not apply to a Hazardous Environmental Condition uncovered or revealed at the Site.

ARTICLE 5 – BONDS AND INSURANCE

5.01 *Performance, Payment, and Other Bonds*

- A. Contractor shall furnish performance and payment bonds, each in an amount at least equal to the Contract Price as security for the faithful performance and payment of all of Contractor's obligations under the Contract Documents. These bonds shall remain in effect until one year after the date when final payment becomes due or until completion of the correction period specified in Paragraph 13.07, whichever is later, except as provided otherwise by Laws or Regulations or by the Contract Documents. Contractor shall also furnish such other bonds as are required by the Contract Documents.
- B. All bonds shall be in the form prescribed by the Contract Documents except as provided otherwise by Laws or Regulations, and shall be executed by such sureties as are named in the list of "Companies Holding Certificates of Authority as Acceptable Sureties on Federal Bonds and as Acceptable Reinsuring Companies" as published in Circular 570 (amended) by the Financial Management Service, Surety Bond Branch, U.S. Department of the Treasury. All bonds signed by an agent or attorney-in-fact must be accompanied by a certified copy of that individual's authority to bind the surety. The evidence of authority shall show that it is effective on the date the agent or attorney-in-fact signed each bond.
- C. If the surety on any bond furnished by Contractor is declared bankrupt or becomes insolvent or its right to do business is terminated in any state where any part of the Project is located or it ceases to meet the requirements of Paragraph 5.01.B, Contractor shall promptly notify Owner and Engineer and shall, within 20 days after the event giving rise to such notification, provide another bond and surety, both of which shall comply with the requirements of Paragraphs 5.01.B and 5.02.

5.02 *Licensed Sureties and Insurers*

- A. All bonds and insurance required by the Contract Documents to be purchased and maintained by Owner or Contractor shall be obtained from surety or insurance companies that are duly licensed or authorized in the jurisdiction in which the Project is located to issue bonds or insurance policies for the limits and coverages so required. Such surety and insurance companies shall also meet such additional requirements and qualifications as may be provided in the Supplementary Conditions.

5.03 *Certificates of Insurance*

- A. Contractor shall deliver to Owner, with copies to each additional insured and loss payee identified in the Supplementary Conditions, certificates of insurance (and other evidence of insurance requested by Owner or any other additional insured) which Contractor is required to purchase and maintain.

- B. Owner shall deliver to Contractor, with copies to each additional insured and loss payee identified in the Supplementary Conditions, certificates of insurance (and other evidence of insurance requested by Contractor or any other additional insured) which Owner is required to purchase and maintain.
- C. Failure of Owner to demand such certificates or other evidence of Contractor's full compliance with these insurance requirements or failure of Owner to identify a deficiency in compliance from the evidence provided shall not be construed as a waiver of Contractor's obligation to maintain such insurance.
- D. Owner does not represent that insurance coverage and limits established in this Contract necessarily will be adequate to protect Contractor.
- E. The insurance and insurance limits required herein shall not be deemed as a limitation on Contractor's liability under the indemnities granted to Owner in the Contract Documents.

5.04 *Contractor's Insurance*

- A. Contractor shall purchase and maintain such insurance as is appropriate for the Work being performed and as will provide protection from claims set forth below which may arise out of or result from Contractor's performance of the Work and Contractor's other obligations under the Contract Documents, whether it is to be performed by Contractor, any Subcontractor or Supplier, or by anyone directly or indirectly employed by any of them to perform any of the Work, or by anyone for whose acts any of them may be liable:
 - 1. claims under workers' compensation, disability benefits, and other similar employee benefit acts;
 - 2. claims for damages because of bodily injury, occupational sickness or disease, or death of Contractor's employees;
 - 3. claims for damages because of bodily injury, sickness or disease, or death of any person other than Contractor's employees;
 - 4. claims for damages insured by reasonably available personal injury liability coverage which are sustained:
 - a. by any person as a result of an offense directly or indirectly related to the employment of such person by Contractor, or
 - b. by any other person for any other reason;
 - 5. claims for damages, other than to the Work itself, because of injury to or destruction of tangible property wherever located, including loss of use resulting therefrom; and
 - 6. claims for damages because of bodily injury or death of any person or property damage arising out of the ownership, maintenance or use of any motor vehicle.
- B. The policies of insurance required by this Paragraph 5.04 shall:

1. with respect to insurance required by Paragraphs 5.04.A.3 through 5.04.A.6 inclusive, be written on an occurrence basis, include as additional insureds (subject to any customary exclusion regarding professional liability) Owner and Engineer, and any other individuals or entities identified in the Supplementary Conditions, all of whom shall be listed as additional insureds, and include coverage for the respective officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of all such additional insureds, and the insurance afforded to these additional insureds shall provide primary coverage for all claims covered thereby;
2. include at least the specific coverages and be written for not less than the limits of liability provided in the Supplementary Conditions or required by Laws or Regulations, whichever is greater;
3. include contractual liability insurance covering Contractor's indemnity obligations under Paragraphs 6.11 and 6.20;
4. contain a provision or endorsement that the coverage afforded will not be canceled, materially changed or renewal refused until at least 30 days prior written notice has been given to Owner and Contractor and to each other additional insured identified in the Supplementary Conditions to whom a certificate of insurance has been issued (and the certificates of insurance furnished by the Contractor pursuant to Paragraph 5.03 will so provide);
5. remain in effect at least until final payment and at all times thereafter when Contractor may be correcting, removing, or replacing defective Work in accordance with Paragraph 13.07; and
6. include completed operations coverage:
 - a. Such insurance shall remain in effect for two years after final payment.
 - b. Contractor shall furnish Owner and each other additional insured identified in the Supplementary Conditions, to whom a certificate of insurance has been issued, evidence satisfactory to Owner and any such additional insured of continuation of such insurance at final payment and one year thereafter.

5.05 *Owner's Liability Insurance*

- A. In addition to the insurance required to be provided by Contractor under Paragraph 5.04, Owner, at Owner's option, may purchase and maintain at Owner's expense Owner's own liability insurance as will protect Owner against claims which may arise from operations under the Contract Documents.

5.06 *Property Insurance*

- A. Unless otherwise provided in the Supplementary Conditions, Owner shall purchase and maintain property insurance upon the Work at the Site in the amount of the full replacement cost thereof (subject to such deductible amounts as may be provided in the Supplementary Conditions or required by Laws and Regulations). This insurance shall:

1. include the interests of Owner, Contractor, Subcontractors, and Engineer, and any other individuals or entities identified in the Supplementary Conditions, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them, each of whom is deemed to have an insurable interest and shall be listed as a loss payee;
 2. be written on a Builder's Risk "all-risk" policy form that shall at least include insurance for physical loss or damage to the Work, temporary buildings, falsework, and materials and equipment in transit, and shall insure against at least the following perils or causes of loss: fire, lightning, extended coverage, theft, vandalism and malicious mischief, earthquake, collapse, debris removal, demolition occasioned by enforcement of Laws and Regulations, water damage (other than that caused by flood), and such other perils or causes of loss as may be specifically required by the Supplementary Conditions.
 3. include expenses incurred in the repair or replacement of any insured property (including but not limited to fees and charges of engineers and architects);
 4. cover materials and equipment stored at the Site or at another location that was agreed to in writing by Owner prior to being incorporated in the Work, provided that such materials and equipment have been included in an Application for Payment recommended by Engineer;
 5. allow for partial utilization of the Work by Owner;
 6. include testing and startup; and
 7. be maintained in effect until final payment is made unless otherwise agreed to in writing by Owner, Contractor, and Engineer with 30 days written notice to each other loss payee to whom a certificate of insurance has been issued.
- B. Owner shall purchase and maintain such equipment breakdown insurance or additional property insurance as may be required by the Supplementary Conditions or Laws and Regulations which will include the interests of Owner, Contractor, Subcontractors, and Engineer, and any other individuals or entities identified in the Supplementary Conditions, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them, each of whom is deemed to have an insurable interest and shall be listed as a loss payee.
- C. All the policies of insurance (and the certificates or other evidence thereof) required to be purchased and maintained in accordance with this Paragraph 5.06 will contain a provision or endorsement that the coverage afforded will not be canceled or materially changed or renewal refused until at least 30 days prior written notice has been given to Owner and Contractor and to each other loss payee to whom a certificate of insurance has been issued and will contain waiver provisions in accordance with Paragraph 5.07.
- D. Owner shall not be responsible for purchasing and maintaining any property insurance specified in this Paragraph 5.06 to protect the interests of Contractor, Subcontractors, or others in the Work to the extent of any deductible amounts that are identified in the Supplementary Conditions. The risk of loss within such identified deductible amount will be borne by Contractor, Subcontractors, or others suffering any such loss, and if any of them wishes property

insurance coverage within the limits of such amounts, each may purchase and maintain it at the purchaser's own expense.

- E. If Contractor requests in writing that other special insurance be included in the property insurance policies provided under this Paragraph 5.06, Owner shall, if possible, include such insurance, and the cost thereof will be charged to Contractor by appropriate Change Order. Prior to commencement of the Work at the Site, Owner shall in writing advise Contractor whether or not such other insurance has been procured by Owner.

5.07 *Waiver of Rights*

- A. Owner and Contractor intend that all policies purchased in accordance with Paragraph 5.06 will protect Owner, Contractor, Subcontractors, and Engineer, and all other individuals or entities identified in the Supplementary Conditions as loss payees (and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them) in such policies and will provide primary coverage for all losses and damages caused by the perils or causes of loss covered thereby. All such policies shall contain provisions to the effect that in the event of payment of any loss or damage the insurers will have no rights of recovery against any of the insureds or loss payees thereunder. Owner and Contractor waive all rights against each other and their respective officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them for all losses and damages caused by, arising out of or resulting from any of the perils or causes of loss covered by such policies and any other property insurance applicable to the Work; and, in addition, waive all such rights against Subcontractors and Engineer, and all other individuals or entities identified in the Supplementary Conditions as loss payees (and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them) under such policies for losses and damages so caused. None of the above waivers shall extend to the rights that any party making such waiver may have to the proceeds of insurance held by Owner as trustee or otherwise payable under any policy so issued.
- B. Owner waives all rights against Contractor, Subcontractors, and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them for:
 - 1. loss due to business interruption, loss of use, or other consequential loss extending beyond direct physical loss or damage to Owner's property or the Work caused by, arising out of, or resulting from fire or other perils whether or not insured by Owner; and
 - 2. loss or damage to the completed Project or part thereof caused by, arising out of, or resulting from fire or other insured peril or cause of loss covered by any property insurance maintained on the completed Project or part thereof by Owner during partial utilization pursuant to Paragraph 14.05, after Substantial Completion pursuant to Paragraph 14.04, or after final payment pursuant to Paragraph 14.07.
- C. Any insurance policy maintained by Owner covering any loss, damage or consequential loss referred to in Paragraph 5.07.B shall contain provisions to the effect that in the event of payment of any such loss, damage, or consequential loss, the insurers will have no rights of recovery

against Contractor, Subcontractors, or Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them.

5.08 *Receipt and Application of Insurance Proceeds*

- A. Any insured loss under the policies of insurance required by Paragraph 5.06 will be adjusted with Owner and made payable to Owner as fiduciary for the loss payees, as their interests may appear, subject to the requirements of any applicable mortgage clause and of Paragraph 5.08.B. Owner shall deposit in a separate account any money so received and shall distribute it in accordance with such agreement as the parties in interest may reach. If no other special agreement is reached, the damaged Work shall be repaired or replaced, the moneys so received applied on account thereof, and the Work and the cost thereof covered by an appropriate Change Order.
- B. Owner as fiduciary shall have power to adjust and settle any loss with the insurers unless one of the parties in interest shall object in writing within 15 days after the occurrence of loss to Owner's exercise of this power. If such objection be made, Owner as fiduciary shall make settlement with the insurers in accordance with such agreement as the parties in interest may reach. If no such agreement among the parties in interest is reached, Owner as fiduciary shall adjust and settle the loss with the insurers and, if required in writing by any party in interest, Owner as fiduciary shall give bond for the proper performance of such duties.

5.09 *Acceptance of Bonds and Insurance; Option to Replace*

- A. If either Owner or Contractor has any objection to the coverage afforded by or other provisions of the bonds or insurance required to be purchased and maintained by the other party in accordance with Article 5 on the basis of non-conformance with the Contract Documents, the objecting party shall so notify the other party in writing within 10 days after receipt of the certificates (or other evidence requested) required by Paragraph 2.01.B. Owner and Contractor shall each provide to the other such additional information in respect of insurance provided as the other may reasonably request. If either party does not purchase or maintain all of the bonds and insurance required of such party by the Contract Documents, such party shall notify the other party in writing of such failure to purchase prior to the start of the Work, or of such failure to maintain prior to any change in the required coverage. Without prejudice to any other right or remedy, the other party may elect to obtain equivalent bonds or insurance to protect such other party's interests at the expense of the party who was required to provide such coverage, and a Change Order shall be issued to adjust the Contract Price accordingly.

5.10 *Partial Utilization, Acknowledgment of Property Insurer*

- A. If Owner finds it necessary to occupy or use a portion or portions of the Work prior to Substantial Completion of all the Work as provided in Paragraph 14.05, no such use or occupancy shall commence before the insurers providing the property insurance pursuant to Paragraph 5.06 have acknowledged notice thereof and in writing effected any changes in coverage necessitated thereby. The insurers providing the property insurance shall consent by endorsement on the policy or policies, but the property insurance shall not be canceled or permitted to lapse on account of any such partial use or occupancy.

ARTICLE 6 – CONTRACTOR’S RESPONSIBILITIES

6.01 *Supervision and Superintendence*

- A. Contractor shall supervise, inspect, and direct the Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the Work in accordance with the Contract Documents. Contractor shall be solely responsible for the means, methods, techniques, sequences, and procedures of construction. Contractor shall not be responsible for the negligence of Owner or Engineer in the design or specification of a specific means, method, technique, sequence, or procedure of construction which is shown or indicated in and expressly required by the Contract Documents.
- B. At all times during the progress of the Work, Contractor shall assign a competent resident superintendent who shall not be replaced without written notice to Owner and Engineer except under extraordinary circumstances.

6.02 *Labor; Working Hours*

- A. Contractor shall provide competent, suitably qualified personnel to survey and lay out the Work and perform construction as required by the Contract Documents. Contractor shall at all times maintain good discipline and order at the Site.
- B. Except as otherwise required for the safety or protection of persons or the Work or property at the Site or adjacent thereto, and except as otherwise stated in the Contract Documents, all Work at the Site shall be performed during regular working hours. Contractor will not permit the performance of Work on a Saturday, Sunday, or any legal holiday without Owner’s written consent (which will not be unreasonably withheld) given after prior written notice to Engineer.

6.03 *Services, Materials, and Equipment*

- A. Unless otherwise specified in the Contract Documents, Contractor shall provide and assume full responsibility for all services, materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities, and all other facilities and incidentals necessary for the performance, testing, start-up, and completion of the Work.
- B. All materials and equipment incorporated into the Work shall be as specified or, if not specified, shall be of good quality and new, except as otherwise provided in the Contract Documents. All special warranties and guarantees required by the Specifications shall expressly run to the benefit of Owner. If required by Engineer, Contractor shall furnish satisfactory evidence (including reports of required tests) as to the source, kind, and quality of materials and equipment.
- C. All materials and equipment shall be stored, applied, installed, connected, erected, protected, used, cleaned, and conditioned in accordance with instructions of the applicable Supplier, except as otherwise may be provided in the Contract Documents.

6.04 *Progress Schedule*

- A. Contractor shall adhere to the Progress Schedule established in accordance with Paragraph 2.07 as it may be adjusted from time to time as provided below.
1. Contractor shall submit to Engineer for acceptance (to the extent indicated in Paragraph 2.07) proposed adjustments in the Progress Schedule that will not result in changing the Contract Times. Such adjustments will comply with any provisions of the General Requirements applicable thereto.
 2. Proposed adjustments in the Progress Schedule that will change the Contract Times shall be submitted in accordance with the requirements of Article 12. Adjustments in Contract Times may only be made by a Change Order.

6.05 *Substitutes and "Or-Equals"*

- A. Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the specification or description is intended to establish the type, function, appearance, and quality required. Unless the specification or description contains or is followed by words reading that no like, equivalent, or "or-equal" item or no substitution is permitted, other items of material or equipment or material or equipment of other Suppliers may be submitted to Engineer for review under the circumstances described below.
1. *"Or-Equal" Items:* If in Engineer's sole discretion an item of material or equipment proposed by Contractor is functionally equal to that named and sufficiently similar so that no change in related Work will be required, it may be considered by Engineer as an "or-equal" item, in which case review and approval of the proposed item may, in Engineer's sole discretion, be accomplished without compliance with some or all of the requirements for approval of proposed substitute items. For the purposes of this Paragraph 6.05.A.1, a proposed item of material or equipment will be considered functionally equal to an item so named if:
 - a. in the exercise of reasonable judgment Engineer determines that:
 - 1) it is at least equal in materials of construction, quality, durability, appearance, strength, and design characteristics;
 - 2) it will reliably perform at least equally well the function and achieve the results imposed by the design concept of the completed Project as a functioning whole; and
 - 3) it has a proven record of performance and availability of responsive service.
 - b. Contractor certifies that, if approved and incorporated into the Work:
 - 1) there will be no increase in cost to the Owner or increase in Contract Times; and
 - 2) it will conform substantially to the detailed requirements of the item named in the Contract Documents.

2. *Substitute Items:*

- a. If in Engineer's sole discretion an item of material or equipment proposed by Contractor does not qualify as an "or-equal" item under Paragraph 6.05.A.1, it will be considered a proposed substitute item.
- b. Contractor shall submit sufficient information as provided below to allow Engineer to determine if the item of material or equipment proposed is essentially equivalent to that named and an acceptable substitute therefor. Requests for review of proposed substitute items of material or equipment will not be accepted by Engineer from anyone other than Contractor.
- c. The requirements for review by Engineer will be as set forth in Paragraph 6.05.A.2.d, as supplemented by the General Requirements, and as Engineer may decide is appropriate under the circumstances.
- d. Contractor shall make written application to Engineer for review of a proposed substitute item of material or equipment that Contractor seeks to furnish or use. The application:
 - 1) shall certify that the proposed substitute item will:
 - a) perform adequately the functions and achieve the results called for by the general design,
 - b) be similar in substance to that specified, and
 - c) be suited to the same use as that specified;
 - 2) will state:
 - a) the extent, if any, to which the use of the proposed substitute item will prejudice Contractor's achievement of Substantial Completion on time,
 - b) whether use of the proposed substitute item in the Work will require a change in any of the Contract Documents (or in the provisions of any other direct contract with Owner for other work on the Project) to adapt the design to the proposed substitute item, and
 - c) whether incorporation or use of the proposed substitute item in connection with the Work is subject to payment of any license fee or royalty;
 - 3) will identify:
 - a) all variations of the proposed substitute item from that specified, and
 - b) available engineering, sales, maintenance, repair, and replacement services; and

- 4) shall contain an itemized estimate of all costs or credits that will result directly or indirectly from use of such substitute item, including costs of redesign and claims of other contractors affected by any resulting change.
- B. *Substitute Construction Methods or Procedures:* If a specific means, method, technique, sequence, or procedure of construction is expressly required by the Contract Documents, Contractor may furnish or utilize a substitute means, method, technique, sequence, or procedure of construction approved by Engineer. Contractor shall submit sufficient information to allow Engineer, in Engineer's sole discretion, to determine that the substitute proposed is equivalent to that expressly called for by the Contract Documents. The requirements for review by Engineer will be similar to those provided in Paragraph 6.05.A.2.
- C. *Engineer's Evaluation:* Engineer will be allowed a reasonable time within which to evaluate each proposal or submittal made pursuant to Paragraphs 6.05.A and 6.05.B. Engineer may require Contractor to furnish additional data about the proposed substitute item. Engineer will be the sole judge of acceptability. No "or equal" or substitute will be ordered, installed or utilized until Engineer's review is complete, which will be evidenced by a Change Order in the case of a substitute and an approved Shop Drawing for an "or equal." Engineer will advise Contractor in writing of any negative determination.
- D. *Special Guarantee:* Owner may require Contractor to furnish at Contractor's expense a special performance guarantee or other surety with respect to any substitute.
- E. *Engineer's Cost Reimbursement:* Engineer will record Engineer's costs in evaluating a substitute proposed or submitted by Contractor pursuant to Paragraphs 6.05.A.2 and 6.05.B. Whether or not Engineer approves a substitute so proposed or submitted by Contractor, Contractor shall reimburse Owner for the reasonable charges of Engineer for evaluating each such proposed substitute. Contractor shall also reimburse Owner for the reasonable charges of Engineer for making changes in the Contract Documents (or in the provisions of any other direct contract with Owner) resulting from the acceptance of each proposed substitute.
- F. *Contractor's Expense:* Contractor shall provide all data in support of any proposed substitute or "or-equal" at Contractor's expense.

6.06 *Concerning Subcontractors, Suppliers, and Others*

- A. Contractor shall not employ any Subcontractor, Supplier, or other individual or entity (including those acceptable to Owner as indicated in Paragraph 6.06.B), whether initially or as a replacement, against whom Owner may have reasonable objection. Contractor shall not be required to employ any Subcontractor, Supplier, or other individual or entity to furnish or perform any of the Work against whom Contractor has reasonable objection.
- B. If the Supplementary Conditions require the identity of certain Subcontractors, Suppliers, or other individuals or entities to be submitted to Owner in advance for acceptance by Owner by a specified date prior to the Effective Date of the Agreement, and if Contractor has submitted a list thereof in accordance with the Supplementary Conditions, Owner's acceptance (either in writing or by failing to make written objection thereto by the date indicated for acceptance or objection in the Bidding Documents or the Contract Documents) of any such Subcontractor, Supplier, or

other individual or entity so identified may be revoked on the basis of reasonable objection after due investigation. Contractor shall submit an acceptable replacement for the rejected Subcontractor, Supplier, or other individual or entity, and the Contract Price will be adjusted by the difference in the cost occasioned by such replacement, and an appropriate Change Order will be issued. No acceptance by Owner of any such Subcontractor, Supplier, or other individual or entity, whether initially or as a replacement, shall constitute a waiver of any right of Owner or Engineer to reject defective Work.

- C. Contractor shall be fully responsible to Owner and Engineer for all acts and omissions of the Subcontractors, Suppliers, and other individuals or entities performing or furnishing any of the Work just as Contractor is responsible for Contractor's own acts and omissions. Nothing in the Contract Documents:
 - 1. shall create for the benefit of any such Subcontractor, Supplier, or other individual or entity any contractual relationship between Owner or Engineer and any such Subcontractor, Supplier or other individual or entity; nor
 - 2. shall create any obligation on the part of Owner or Engineer to pay or to see to the payment of any moneys due any such Subcontractor, Supplier, or other individual or entity except as may otherwise be required by Laws and Regulations.
- D. Contractor shall be solely responsible for scheduling and coordinating the Work of Subcontractors, Suppliers, and other individuals or entities performing or furnishing any of the Work under a direct or indirect contract with Contractor.
- E. Contractor shall require all Subcontractors, Suppliers, and such other individuals or entities performing or furnishing any of the Work to communicate with Engineer through Contractor.
- F. The divisions and sections of the Specifications and the identifications of any Drawings shall not control Contractor in dividing the Work among Subcontractors or Suppliers or delineating the Work to be performed by any specific trade.
- G. All Work performed for Contractor by a Subcontractor or Supplier will be pursuant to an appropriate agreement between Contractor and the Subcontractor or Supplier which specifically binds the Subcontractor or Supplier to the applicable terms and conditions of the Contract Documents for the benefit of Owner and Engineer. Whenever any such agreement is with a Subcontractor or Supplier who is listed as a loss payee on the property insurance provided in Paragraph 5.06, the agreement between the Contractor and the Subcontractor or Supplier will contain provisions whereby the Subcontractor or Supplier waives all rights against Owner, Contractor, Engineer, and all other individuals or entities identified in the Supplementary Conditions to be listed as insureds or loss payees (and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them) for all losses and damages caused by, arising out of, relating to, or resulting from any of the perils or causes of loss covered by such policies and any other property insurance applicable to the Work. If the insurers on any such policies require separate waiver forms to be signed by any Subcontractor or Supplier, Contractor will obtain the same.

6.07 *Patent Fees and Royalties*

- A. Contractor shall pay all license fees and royalties and assume all costs incident to the use in the performance of the Work or the incorporation in the Work of any invention, design, process, product, or device which is the subject of patent rights or copyrights held by others. If a particular invention, design, process, product, or device is specified in the Contract Documents for use in the performance of the Work and if, to the actual knowledge of Owner or Engineer, its use is subject to patent rights or copyrights calling for the payment of any license fee or royalty to others, the existence of such rights shall be disclosed by Owner in the Contract Documents.
- B. To the fullest extent permitted by Laws and Regulations, Owner shall indemnify and hold harmless Contractor, and its officers, directors, members, partners, employees, agents, consultants, and subcontractors from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals, and all court or arbitration or other dispute resolution costs) arising out of or relating to any infringement of patent rights or copyrights incident to the use in the performance of the Work or resulting from the incorporation in the Work of any invention, design, process, product, or device specified in the Contract Documents, but not identified as being subject to payment of any license fee or royalty to others required by patent rights or copyrights.
- C. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to any infringement of patent rights or copyrights incident to the use in the performance of the Work or resulting from the incorporation in the Work of any invention, design, process, product, or device not specified in the Contract Documents.

6.08 *Permits*

- A. Unless otherwise provided in the Supplementary Conditions, Contractor shall obtain and pay for all construction permits and licenses. Owner shall assist Contractor, when necessary, in obtaining such permits and licenses. Contractor shall pay all governmental charges and inspection fees necessary for the prosecution of the Work which are applicable at the time of opening of Bids, or, if there are no Bids, on the Effective Date of the Agreement. Owner shall pay all charges of utility owners for connections for providing permanent service to the Work.

6.09 *Laws and Regulations*

- A. Contractor shall give all notices required by and shall comply with all Laws and Regulations applicable to the performance of the Work. Except where otherwise expressly required by applicable Laws and Regulations, neither Owner nor Engineer shall be responsible for monitoring Contractor's compliance with any Laws or Regulations.
- B. If Contractor performs any Work knowing or having reason to know that it is contrary to Laws or Regulations, Contractor shall bear all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all

court or arbitration or other dispute resolution costs) arising out of or relating to such Work. However, it shall not be Contractor's responsibility to make certain that the Specifications and Drawings are in accordance with Laws and Regulations, but this shall not relieve Contractor of Contractor's obligations under Paragraph 3.03.

- C. Changes in Laws or Regulations not known at the time of opening of Bids (or, on the Effective Date of the Agreement if there were no Bids) having an effect on the cost or time of performance of the Work shall be the subject of an adjustment in Contract Price or Contract Times. If Owner and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any such adjustment, a Claim may be made therefor as provided in Paragraph 10.05.

6.10 Taxes

- A. Contractor shall pay all sales, consumer, use, and other similar taxes required to be paid by Contractor in accordance with the Laws and Regulations of the place of the Project which are applicable during the performance of the Work.

6.11 Use of Site and Other Areas

A. *Limitation on Use of Site and Other Areas:*

1. Contractor shall confine construction equipment, the storage of materials and equipment, and the operations of workers to the Site and other areas permitted by Laws and Regulations, and shall not unreasonably encumber the Site and other areas with construction equipment or other materials or equipment. Contractor shall assume full responsibility for any damage to any such land or area, or to the owner or occupant thereof, or of any adjacent land or areas resulting from the performance of the Work.
2. Should any claim be made by any such owner or occupant because of the performance of the Work, Contractor shall promptly settle with such other party by negotiation or otherwise resolve the claim by arbitration or other dispute resolution proceeding or at law.
3. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to any claim or action, legal or equitable, brought by any such owner or occupant against Owner, Engineer, or any other party indemnified hereunder to the extent caused by or based upon Contractor's performance of the Work.

- B. *Removal of Debris During Performance of the Work:* During the progress of the Work Contractor shall keep the Site and other areas free from accumulations of waste materials, rubbish, and other debris. Removal and disposal of such waste materials, rubbish, and other debris shall conform to applicable Laws and Regulations.

- C. *Cleaning:* Prior to Substantial Completion of the Work Contractor shall clean the Site and the Work and make it ready for utilization by Owner. At the completion of the Work Contractor

shall remove from the Site all tools, appliances, construction equipment and machinery, and surplus materials and shall restore to original condition all property not designated for alteration by the Contract Documents.

- D. *Loading Structures:* Contractor shall not load nor permit any part of any structure to be loaded in any manner that will endanger the structure, nor shall Contractor subject any part of the Work or adjacent property to stresses or pressures that will endanger it.

6.12 *Record Documents*

- A. Contractor shall maintain in a safe place at the Site one record copy of all Drawings, Specifications, Addenda, Change Orders, Work Change Directives, Field Orders, and written interpretations and clarifications in good order and annotated to show changes made during construction. These record documents together with all approved Samples and a counterpart of all approved Shop Drawings will be available to Engineer for reference. Upon completion of the Work, these record documents, Samples, and Shop Drawings will be delivered to Engineer for Owner.

6.13 *Safety and Protection*

- A. Contractor shall be solely responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the Work. Such responsibility does not relieve Subcontractors of their responsibility for the safety of persons or property in the performance of their work, nor for compliance with applicable safety Laws and Regulations. Contractor shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury or loss to:
1. all persons on the Site or who may be affected by the Work;
 2. all the Work and materials and equipment to be incorporated therein, whether in storage on or off the Site; and
 3. other property at the Site or adjacent thereto, including trees, shrubs, lawns, walks, pavements, roadways, structures, utilities, and Underground Facilities not designated for removal, relocation, or replacement in the course of construction.
- B. Contractor shall comply with all applicable Laws and Regulations relating to the safety of persons or property, or to the protection of persons or property from damage, injury, or loss; and shall erect and maintain all necessary safeguards for such safety and protection. Contractor shall notify owners of adjacent property and of Underground Facilities and other utility owners when prosecution of the Work may affect them, and shall cooperate with them in the protection, removal, relocation, and replacement of their property.
- C. Contractor shall comply with the applicable requirements of Owner's safety programs, if any. The Supplementary Conditions identify any Owner's safety programs that are applicable to the Work.

- D. Contractor shall inform Owner and Engineer of the specific requirements of Contractor's safety program with which Owner's and Engineer's employees and representatives must comply while at the Site.
- E. All damage, injury, or loss to any property referred to in Paragraph 6.13.A.2 or 6.13.A.3 caused, directly or indirectly, in whole or in part, by Contractor, any Subcontractor, Supplier, or any other individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable, shall be remedied by Contractor (except damage or loss attributable to the fault of Drawings or Specifications or to the acts or omissions of Owner or Engineer or anyone employed by any of them, or anyone for whose acts any of them may be liable, and not attributable, directly or indirectly, in whole or in part, to the fault or negligence of Contractor or any Subcontractor, Supplier, or other individual or entity directly or indirectly employed by any of them).
- F. Contractor's duties and responsibilities for safety and for protection of the Work shall continue until such time as all the Work is completed and Engineer has issued a notice to Owner and Contractor in accordance with Paragraph 14.07.B that the Work is acceptable (except as otherwise expressly provided in connection with Substantial Completion).

6.14 *Safety Representative*

- A. Contractor shall designate a qualified and experienced safety representative at the Site whose duties and responsibilities shall be the prevention of accidents and the maintaining and supervising of safety precautions and programs.

6.15 *Hazard Communication Programs*

- A. Contractor shall be responsible for coordinating any exchange of material safety data sheets or other hazard communication information required to be made available to or exchanged between or among employers at the Site in accordance with Laws or Regulations.

6.16 *Emergencies*

- A. In emergencies affecting the safety or protection of persons or the Work or property at the Site or adjacent thereto, Contractor is obligated to act to prevent threatened damage, injury, or loss. Contractor shall give Engineer prompt written notice if Contractor believes that any significant changes in the Work or variations from the Contract Documents have been caused thereby or are required as a result thereof. If Engineer determines that a change in the Contract Documents is required because of the action taken by Contractor in response to such an emergency, a Work Change Directive or Change Order will be issued.

6.17 *Shop Drawings and Samples*

- A. Contractor shall submit Shop Drawings and Samples to Engineer for review and approval in accordance with the accepted Schedule of Submittals (as required by Paragraph 2.07). Each submittal will be identified as Engineer may require.

1. *Shop Drawings:*
 - a. Submit number of copies specified in the General Requirements.
 - b. Data shown on the Shop Drawings will be complete with respect to quantities, dimensions, specified performance and design criteria, materials, and similar data to show Engineer the services, materials, and equipment Contractor proposes to provide and to enable Engineer to review the information for the limited purposes required by Paragraph 6.17.D.
 2. *Samples:*
 - a. Submit number of Samples specified in the Specifications.
 - b. Clearly identify each Sample as to material, Supplier, pertinent data such as catalog numbers, the use for which intended and other data as Engineer may require to enable Engineer to review the submittal for the limited purposes required by Paragraph 6.17.D.
- B. Where a Shop Drawing or Sample is required by the Contract Documents or the Schedule of Submittals, any related Work performed prior to Engineer's review and approval of the pertinent submittal will be at the sole expense and responsibility of Contractor.
- C. *Submittal Procedures:*
1. Before submitting each Shop Drawing or Sample, Contractor shall have:
 - a. reviewed and coordinated each Shop Drawing or Sample with other Shop Drawings and Samples and with the requirements of the Work and the Contract Documents;
 - b. determined and verified all field measurements, quantities, dimensions, specified performance and design criteria, installation requirements, materials, catalog numbers, and similar information with respect thereto;
 - c. determined and verified the suitability of all materials offered with respect to the indicated application, fabrication, shipping, handling, storage, assembly, and installation pertaining to the performance of the Work; and
 - d. determined and verified all information relative to Contractor's responsibilities for means, methods, techniques, sequences, and procedures of construction, and safety precautions and programs incident thereto.
 2. Each submittal shall bear a stamp or specific written certification that Contractor has satisfied Contractor's obligations under the Contract Documents with respect to Contractor's review and approval of that submittal.
 3. With each submittal, Contractor shall give Engineer specific written notice of any variations that the Shop Drawing or Sample may have from the requirements of the Contract Documents. This notice shall be both a written communication separate from the Shop

Drawings or Sample submittal; and, in addition, by a specific notation made on each Shop Drawing or Sample submitted to Engineer for review and approval of each such variation.

D. Engineer's Review:

1. Engineer will provide timely review of Shop Drawings and Samples in accordance with the Schedule of Submittals acceptable to Engineer. Engineer's review and approval will be only to determine if the items covered by the submittals will, after installation or incorporation in the Work, conform to the information given in the Contract Documents and be compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents.
2. Engineer's review and approval will not extend to means, methods, techniques, sequences, or procedures of construction (except where a particular means, method, technique, sequence, or procedure of construction is specifically and expressly called for by the Contract Documents) or to safety precautions or programs incident thereto. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.
3. Engineer's review and approval shall not relieve Contractor from responsibility for any variation from the requirements of the Contract Documents unless Contractor has complied with the requirements of Paragraph 6.17.C.3 and Engineer has given written approval of each such variation by specific written notation thereof incorporated in or accompanying the Shop Drawing or Sample. Engineer's review and approval shall not relieve Contractor from responsibility for complying with the requirements of Paragraph 6.17.C.1.

E. Resubmittal Procedures:

1. Contractor shall make corrections required by Engineer and shall return the required number of corrected copies of Shop Drawings and submit, as required, new Samples for review and approval. Contractor shall direct specific attention in writing to revisions other than the corrections called for by Engineer on previous submittals.

6.18 *Continuing the Work*

- A. Contractor shall carry on the Work and adhere to the Progress Schedule during all disputes or disagreements with Owner. No Work shall be delayed or postponed pending resolution of any disputes or disagreements, except as permitted by Paragraph 15.04 or as Owner and Contractor may otherwise agree in writing.

6.19 *Contractor's General Warranty and Guarantee*

- A. Contractor warrants and guarantees to Owner that all Work will be in accordance with the Contract Documents and will not be defective. Engineer and its officers, directors, members, partners, employees, agents, consultants, and subcontractors shall be entitled to rely on representation of Contractor's warranty and guarantee.
- B. Contractor's warranty and guarantee hereunder excludes defects or damage caused by:

1. abuse, modification, or improper maintenance or operation by persons other than Contractor, Subcontractors, Suppliers, or any other individual or entity for whom Contractor is responsible; or
 2. normal wear and tear under normal usage.
- C. Contractor's obligation to perform and complete the Work in accordance with the Contract Documents shall be absolute. None of the following will constitute an acceptance of Work that is not in accordance with the Contract Documents or a release of Contractor's obligation to perform the Work in accordance with the Contract Documents:
1. observations by Engineer;
 2. recommendation by Engineer or payment by Owner of any progress or final payment;
 3. the issuance of a certificate of Substantial Completion by Engineer or any payment related thereto by Owner;
 4. use or occupancy of the Work or any part thereof by Owner;
 5. any review and approval of a Shop Drawing or Sample submittal or the issuance of a notice of acceptability by Engineer;
 6. any inspection, test, or approval by others; or
 7. any correction of defective Work by Owner.

6.20 *Indemnification*

- A. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to the performance of the Work, provided that any such claim, cost, loss, or damage is attributable to bodily injury, sickness, disease, or death, or to injury to or destruction of tangible property (other than the Work itself), including the loss of use resulting therefrom but only to the extent caused by any negligent act or omission of Contractor, any Subcontractor, any Supplier, or any individual or entity directly or indirectly employed by any of them to perform any of the Work or anyone for whose acts any of them may be liable .
- B. In any and all claims against Owner or Engineer or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors by any employee (or the survivor or personal representative of such employee) of Contractor, any Subcontractor, any Supplier, or any individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable, the indemnification obligation under Paragraph 6.20.A shall not be limited in any way by any limitation on the amount or type of damages, compensation, or benefits payable by or for Contractor or any such Subcontractor,

Supplier, or other individual or entity under workers' compensation acts, disability benefit acts, or other employee benefit acts.

- C. The indemnification obligations of Contractor under Paragraph 6.20.A shall not extend to the liability of Engineer and Engineer's officers, directors, members, partners, employees, agents, consultants and subcontractors arising out of:
 - 1. the preparation or approval of, or the failure to prepare or approve maps, Drawings, opinions, reports, surveys, Change Orders, designs, or Specifications; or
 - 2. giving directions or instructions, or failing to give them, if that is the primary cause of the injury or damage.

6.21 *Delegation of Professional Design Services*

- A. Contractor will not be required to provide professional design services unless such services are specifically required by the Contract Documents for a portion of the Work or unless such services are required to carry out Contractor's responsibilities for construction means, methods, techniques, sequences and procedures. Contractor shall not be required to provide professional services in violation of applicable law.
- B. If professional design services or certifications by a design professional related to systems, materials or equipment are specifically required of Contractor by the Contract Documents, Owner and Engineer will specify all performance and design criteria that such services must satisfy. Contractor shall cause such services or certifications to be provided by a properly licensed professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings and other submittals prepared by such professional. Shop Drawings and other submittals related to the Work designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to Engineer.
- C. Owner and Engineer shall be entitled to rely upon the adequacy, accuracy and completeness of the services, certifications or approvals performed by such design professionals, provided Owner and Engineer have specified to Contractor all performance and design criteria that such services must satisfy.
- D. Pursuant to this Paragraph 6.21, Engineer's review and approval of design calculations and design drawings will be only for the limited purpose of checking for conformance with performance and design criteria given and the design concept expressed in the Contract Documents. Engineer's review and approval of Shop Drawings and other submittals (except design calculations and design drawings) will be only for the purpose stated in Paragraph 6.17.D.1.
- E. Contractor shall not be responsible for the adequacy of the performance or design criteria required by the Contract Documents.

ARTICLE 7 – OTHER WORK AT THE SITE

7.01 *Related Work at Site*

- A. Owner may perform other work related to the Project at the Site with Owner's employees, or through other direct contracts therefor, or have other work performed by utility owners. If such other work is not noted in the Contract Documents, then:
 - 1. written notice thereof will be given to Contractor prior to starting any such other work; and
 - 2. if Owner and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any adjustment in the Contract Price or Contract Times that should be allowed as a result of such other work, a Claim may be made therefor as provided in Paragraph 10.05.
- B. Contractor shall afford each other contractor who is a party to such a direct contract, each utility owner, and Owner, if Owner is performing other work with Owner's employees, proper and safe access to the Site, provide a reasonable opportunity for the introduction and storage of materials and equipment and the execution of such other work, and properly coordinate the Work with theirs. Contractor shall do all cutting, fitting, and patching of the Work that may be required to properly connect or otherwise make its several parts come together and properly integrate with such other work. Contractor shall not endanger any work of others by cutting, excavating, or otherwise altering such work; provided, however, that Contractor may cut or alter others' work with the written consent of Engineer and the others whose work will be affected. The duties and responsibilities of Contractor under this Paragraph are for the benefit of such utility owners and other contractors to the extent that there are comparable provisions for the benefit of Contractor in said direct contracts between Owner and such utility owners and other contractors.
- C. If the proper execution or results of any part of Contractor's Work depends upon work performed by others under this Article 7, Contractor shall inspect such other work and promptly report to Engineer in writing any delays, defects, or deficiencies in such other work that render it unavailable or unsuitable for the proper execution and results of Contractor's Work. Contractor's failure to so report will constitute an acceptance of such other work as fit and proper for integration with Contractor's Work except for latent defects and deficiencies in such other work.

7.02 *Coordination*

- A. If Owner intends to contract with others for the performance of other work on the Project at the Site, the following will be set forth in Supplementary Conditions:
 - 1. the individual or entity who will have authority and responsibility for coordination of the activities among the various contractors will be identified;
 - 2. the specific matters to be covered by such authority and responsibility will be itemized; and
 - 3. the extent of such authority and responsibilities will be provided.
- B. Unless otherwise provided in the Supplementary Conditions, Owner shall have sole authority and responsibility for such coordination.

7.03 *Legal Relationships*

- A. Paragraphs 7.01.A and 7.02 are not applicable for utilities not under the control of Owner.
- B. Each other direct contract of Owner under Paragraph 7.01.A shall provide that the other contractor is liable to Owner and Contractor for the reasonable direct delay and disruption costs incurred by Contractor as a result of the other contractor's wrongful actions or inactions.
- C. Contractor shall be liable to Owner and any other contractor under direct contract to Owner for the reasonable direct delay and disruption costs incurred by such other contractor as a result of Contractor's wrongful action or inactions.

ARTICLE 8 – OWNER'S RESPONSIBILITIES

8.01 *Communications to Contractor*

- A. Except as otherwise provided in these General Conditions, Owner shall issue all communications to Contractor through Engineer.

8.02 *Replacement of Engineer*

- A. In case of termination of the employment of Engineer, Owner shall appoint an engineer to whom Contractor makes no reasonable objection, whose status under the Contract Documents shall be that of the former Engineer.

8.03 *Furnish Data*

- A. Owner shall promptly furnish the data required of Owner under the Contract Documents.

8.04 *Pay When Due*

- A. Owner shall make payments to Contractor when they are due as provided in Paragraphs 14.02.C and 14.07.C.

8.05 *Lands and Easements; Reports and Tests*

- A. Owner's duties with respect to providing lands and easements and providing engineering surveys to establish reference points are set forth in Paragraphs 4.01 and 4.05. Paragraph 4.02 refers to Owner's identifying and making available to Contractor copies of reports of explorations and tests of subsurface conditions and drawings of physical conditions relating to existing surface or subsurface structures at the Site.

8.06 *Insurance*

- A. Owner's responsibilities, if any, with respect to purchasing and maintaining liability and property insurance are set forth in Article 5.

8.07 *Change Orders*

- A. Owner is obligated to execute Change Orders as indicated in Paragraph 10.03.

8.08 *Inspections, Tests, and Approvals*

- A. Owner's responsibility with respect to certain inspections, tests, and approvals is set forth in Paragraph 13.03.B.

8.09 *Limitations on Owner's Responsibilities*

- A. The Owner shall not supervise, direct, or have control or authority over, nor be responsible for, Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work. Owner will not be responsible for Contractor's failure to perform the Work in accordance with the Contract Documents.

8.10 *Undisclosed Hazardous Environmental Condition*

- A. Owner's responsibility in respect to an undisclosed Hazardous Environmental Condition is set forth in Paragraph 4.06.

8.11 *Evidence of Financial Arrangements*

- A. Upon request of Contractor, Owner shall furnish Contractor reasonable evidence that financial arrangements have been made to satisfy Owner's obligations under the Contract Documents.

8.12 *Compliance with Safety Program*

- A. While at the Site, Owner's employees and representatives shall comply with the specific applicable requirements of Contractor's safety programs of which Owner has been informed pursuant to Paragraph 6.13.D.

ARTICLE 9 – ENGINEER'S STATUS DURING CONSTRUCTION

9.01 *Owner's Representative*

- A. Engineer will be Owner's representative during the construction period. The duties and responsibilities and the limitations of authority of Engineer as Owner's representative during construction are set forth in the Contract Documents.

9.02 *Visits to Site*

- A. Engineer will make visits to the Site at intervals appropriate to the various stages of construction as Engineer deems necessary in order to observe as an experienced and qualified design professional the progress that has been made and the quality of the various aspects of Contractor's executed Work. Based on information obtained during such visits and observations, Engineer, for the benefit of Owner, will determine, in general, if the Work is proceeding in accordance with the Contract Documents. Engineer will not be required to make exhaustive or continuous inspections on the Site to check the quality or quantity of the Work. Engineer's efforts will be directed toward providing for Owner a greater degree of confidence that the completed Work will conform generally to the Contract Documents. On the basis of such visits

and observations, Engineer will keep Owner informed of the progress of the Work and will endeavor to guard Owner against defective Work.

- B. Engineer's visits and observations are subject to all the limitations on Engineer's authority and responsibility set forth in Paragraph 9.09. Particularly, but without limitation, during or as a result of Engineer's visits or observations of Contractor's Work, Engineer will not supervise, direct, control, or have authority over or be responsible for Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work.

9.03 *Project Representative*

- A. If Owner and Engineer agree, Engineer will furnish a Resident Project Representative to assist Engineer in providing more extensive observation of the Work. The authority and responsibilities of any such Resident Project Representative and assistants will be as provided in the Supplementary Conditions, and limitations on the responsibilities thereof will be as provided in Paragraph 9.09. If Owner designates another representative or agent to represent Owner at the Site who is not Engineer's consultant, agent or employee, the responsibilities and authority and limitations thereon of such other individual or entity will be as provided in the Supplementary Conditions.

9.04 *Authorized Variations in Work*

- A. Engineer may authorize minor variations in the Work from the requirements of the Contract Documents which do not involve an adjustment in the Contract Price or the Contract Times and are compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. These may be accomplished by a Field Order and will be binding on Owner and also on Contractor, who shall perform the Work involved promptly. If Owner or Contractor believes that a Field Order justifies an adjustment in the Contract Price or Contract Times, or both, and the parties are unable to agree on entitlement to or on the amount or extent, if any, of any such adjustment, a Claim may be made therefor as provided in Paragraph 10.05.

9.05 *Rejecting Defective Work*

- A. Engineer will have authority to reject Work which Engineer believes to be defective, or that Engineer believes will not produce a completed Project that conforms to the Contract Documents or that will prejudice the integrity of the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. Engineer will also have authority to require special inspection or testing of the Work as provided in Paragraph 13.04, whether or not the Work is fabricated, installed, or completed.

9.06 *Shop Drawings, Change Orders and Payments*

- A. In connection with Engineer's authority, and limitations thereof, as to Shop Drawings and Samples, see Paragraph 6.17.

- B. In connection with Engineer's authority, and limitations thereof, as to design calculations and design drawings submitted in response to a delegation of professional design services, if any, see Paragraph 6.21.
- C. In connection with Engineer's authority as to Change Orders, see Articles 10, 11, and 12.
- D. In connection with Engineer's authority as to Applications for Payment, see Article 14.

9.07 *Determinations for Unit Price Work*

- A. Engineer will determine the actual quantities and classifications of Unit Price Work performed by Contractor. Engineer will review with Contractor the Engineer's preliminary determinations on such matters before rendering a written decision thereon (by recommendation of an Application for Payment or otherwise). Engineer's written decision thereon will be final and binding (except as modified by Engineer to reflect changed factual conditions or more accurate data) upon Owner and Contractor, subject to the provisions of Paragraph 10.05.

9.08 *Decisions on Requirements of Contract Documents and Acceptability of Work*

- A. Engineer will be the initial interpreter of the requirements of the Contract Documents and judge of the acceptability of the Work thereunder. All matters in question and other matters between Owner and Contractor arising prior to the date final payment is due relating to the acceptability of the Work, and the interpretation of the requirements of the Contract Documents pertaining to the performance of the Work, will be referred initially to Engineer in writing within 30 days of the event giving rise to the question.
- B. Engineer will, with reasonable promptness, render a written decision on the issue referred. If Owner or Contractor believes that any such decision entitles them to an adjustment in the Contract Price or Contract Times or both, a Claim may be made under Paragraph 10.05. The date of Engineer's decision shall be the date of the event giving rise to the issues referenced for the purposes of Paragraph 10.05.B.
- C. Engineer's written decision on the issue referred will be final and binding on Owner and Contractor, subject to the provisions of Paragraph 10.05.
- D. When functioning as interpreter and judge under this Paragraph 9.08, Engineer will not show partiality to Owner or Contractor and will not be liable in connection with any interpretation or decision rendered in good faith in such capacity.

9.09 *Limitations on Engineer's Authority and Responsibilities*

- A. Neither Engineer's authority or responsibility under this Article 9 or under any other provision of the Contract Documents nor any decision made by Engineer in good faith either to exercise or not exercise such authority or responsibility or the undertaking, exercise, or performance of any authority or responsibility by Engineer shall create, impose, or give rise to any duty in contract, tort, or otherwise owed by Engineer to Contractor, any Subcontractor, any Supplier, any other individual or entity, or to any surety for or employee or agent of any of them.

- B. Engineer will not supervise, direct, control, or have authority over or be responsible for Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work. Engineer will not be responsible for Contractor's failure to perform the Work in accordance with the Contract Documents.
- C. Engineer will not be responsible for the acts or omissions of Contractor or of any Subcontractor, any Supplier, or of any other individual or entity performing any of the Work.
- D. Engineer's review of the final Application for Payment and accompanying documentation and all maintenance and operating instructions, schedules, guarantees, bonds, certificates of inspection, tests and approvals, and other documentation required to be delivered by Paragraph 14.07.A will only be to determine generally that their content complies with the requirements of, and in the case of certificates of inspections, tests, and approvals that the results certified indicate compliance with, the Contract Documents.
- E. The limitations upon authority and responsibility set forth in this Paragraph 9.09 shall also apply to the Resident Project Representative, if any, and assistants, if any.

9.10 *Compliance with Safety Program*

- A. While at the Site, Engineer's employees and representatives shall comply with the specific applicable requirements of Contractor's safety programs of which Engineer has been informed pursuant to Paragraph 6.13.D.

ARTICLE 10 – CHANGES IN THE WORK; CLAIMS

10.01 *Authorized Changes in the Work*

- A. Without invalidating the Contract and without notice to any surety, Owner may, at any time or from time to time, order additions, deletions, or revisions in the Work by a Change Order, or a Work Change Directive. Upon receipt of any such document, Contractor shall promptly proceed with the Work involved which will be performed under the applicable conditions of the Contract Documents (except as otherwise specifically provided).
- B. If Owner and Contractor are unable to agree on entitlement to, or on the amount or extent, if any, of an adjustment in the Contract Price or Contract Times, or both, that should be allowed as a result of a Work Change Directive, a Claim may be made therefor as provided in Paragraph 10.05.

10.02 *Unauthorized Changes in the Work*

- A. Contractor shall not be entitled to an increase in the Contract Price or an extension of the Contract Times with respect to any work performed that is not required by the Contract Documents as amended, modified, or supplemented as provided in Paragraph 3.04, except in the case of an emergency as provided in Paragraph 6.16 or in the case of uncovering Work as provided in Paragraph 13.04.D.

10.03 *Execution of Change Orders*

- A. Owner and Contractor shall execute appropriate Change Orders recommended by Engineer covering:
1. changes in the Work which are: (i) ordered by Owner pursuant to Paragraph 10.01.A, (ii) required because of acceptance of defective Work under Paragraph 13.08.A or Owner's correction of defective Work under Paragraph 13.09, or (iii) agreed to by the parties;
 2. changes in the Contract Price or Contract Times which are agreed to by the parties, including any undisputed sum or amount of time for Work actually performed in accordance with a Work Change Directive; and
 3. changes in the Contract Price or Contract Times which embody the substance of any written decision rendered by Engineer pursuant to Paragraph 10.05; provided that, in lieu of executing any such Change Order, an appeal may be taken from any such decision in accordance with the provisions of the Contract Documents and applicable Laws and Regulations, but during any such appeal, Contractor shall carry on the Work and adhere to the Progress Schedule as provided in Paragraph 6.18.A.

10.04 *Notification to Surety*

- A. If the provisions of any bond require notice to be given to a surety of any change affecting the general scope of the Work or the provisions of the Contract Documents (including, but not limited to, Contract Price or Contract Times), the giving of any such notice will be Contractor's responsibility. The amount of each applicable bond will be adjusted to reflect the effect of any such change.

10.05 *Claims*

- A. *Engineer's Decision Required:* All Claims, except those waived pursuant to Paragraph 14.09, shall be referred to the Engineer for decision. A decision by Engineer shall be required as a condition precedent to any exercise by Owner or Contractor of any rights or remedies either may otherwise have under the Contract Documents or by Laws and Regulations in respect of such Claims.
- B. *Notice:* Written notice stating the general nature of each Claim shall be delivered by the claimant to Engineer and the other party to the Contract promptly (but in no event later than 30 days) after the start of the event giving rise thereto. The responsibility to substantiate a Claim shall rest with the party making the Claim. Notice of the amount or extent of the Claim, with supporting data shall be delivered to the Engineer and the other party to the Contract within 60 days after the start of such event (unless Engineer allows additional time for claimant to submit additional or more accurate data in support of such Claim). A Claim for an adjustment in Contract Price shall be prepared in accordance with the provisions of Paragraph 12.01.B. A Claim for an adjustment in Contract Times shall be prepared in accordance with the provisions of Paragraph 12.02.B. Each Claim shall be accompanied by claimant's written statement that the adjustment claimed is the entire adjustment to which the claimant believes it is entitled as a result of said event. The

opposing party shall submit any response to Engineer and the claimant within 30 days after receipt of the claimant's last submittal (unless Engineer allows additional time).

- C. *Engineer's Action:* Engineer will review each Claim and, within 30 days after receipt of the last submittal of the claimant or the last submittal of the opposing party, if any, take one of the following actions in writing:
1. deny the Claim in whole or in part;
 2. approve the Claim; or
 3. notify the parties that the Engineer is unable to resolve the Claim if, in the Engineer's sole discretion, it would be inappropriate for the Engineer to do so. For purposes of further resolution of the Claim, such notice shall be deemed a denial.
- D. In the event that Engineer does not take action on a Claim within said 30 days, the Claim shall be deemed denied.
- E. Engineer's written action under Paragraph 10.05.C or denial pursuant to Paragraphs 10.05.C.3 or 10.05.D will be final and binding upon Owner and Contractor, unless Owner or Contractor invoke the dispute resolution procedure set forth in Article 16 within 30 days of such action or denial.
- F. No Claim for an adjustment in Contract Price or Contract Times will be valid if not submitted in accordance with this Paragraph 10.05.

ARTICLE 11 – COST OF THE WORK; ALLOWANCES; UNIT PRICE WORK

11.01 *Cost of the Work*

- A. *Costs Included:* The term Cost of the Work means the sum of all costs, except those excluded in Paragraph 11.01.B, necessarily incurred and paid by Contractor in the proper performance of the Work. When the value of any Work covered by a Change Order or when a Claim for an adjustment in Contract Price is determined on the basis of Cost of the Work, the costs to be reimbursed to Contractor will be only those additional or incremental costs required because of the change in the Work or because of the event giving rise to the Claim. Except as otherwise may be agreed to in writing by Owner, such costs shall be in amounts no higher than those prevailing in the locality of the Project, shall not include any of the costs itemized in Paragraph 11.01.B, and shall include only the following items:
1. Payroll costs for employees in the direct employ of Contractor in the performance of the Work under schedules of job classifications agreed upon by Owner and Contractor. Such employees shall include, without limitation, superintendents, foremen, and other personnel employed full time on the Work. Payroll costs for employees not employed full time on the Work shall be apportioned on the basis of their time spent on the Work. Payroll costs shall include, but not be limited to, salaries and wages plus the cost of fringe benefits, which shall include social security contributions, unemployment, excise, and payroll taxes, workers' compensation, health and retirement benefits, bonuses, sick leave, vacation and holiday pay applicable thereto. The expenses of performing Work outside of regular working hours, on

Saturday, Sunday, or legal holidays, shall be included in the above to the extent authorized by Owner.

2. Cost of all materials and equipment furnished and incorporated in the Work, including costs of transportation and storage thereof, and Suppliers' field services required in connection therewith. All cash discounts shall accrue to Contractor unless Owner deposits funds with Contractor with which to make payments, in which case the cash discounts shall accrue to Owner. All trade discounts, rebates and refunds and returns from sale of surplus materials and equipment shall accrue to Owner, and Contractor shall make provisions so that they may be obtained.
3. Payments made by Contractor to Subcontractors for Work performed by Subcontractors. If required by Owner, Contractor shall obtain competitive bids from subcontractors acceptable to Owner and Contractor and shall deliver such bids to Owner, who will then determine, with the advice of Engineer, which bids, if any, will be acceptable. If any subcontract provides that the Subcontractor is to be paid on the basis of Cost of the Work plus a fee, the Subcontractor's Cost of the Work and fee shall be determined in the same manner as Contractor's Cost of the Work and fee as provided in this Paragraph 11.01.
4. Costs of special consultants (including but not limited to engineers, architects, testing laboratories, surveyors, attorneys, and accountants) employed for services specifically related to the Work.
5. Supplemental costs including the following:
 - a. The proportion of necessary transportation, travel, and subsistence expenses of Contractor's employees incurred in discharge of duties connected with the Work.
 - b. Cost, including transportation and maintenance, of all materials, supplies, equipment, machinery, appliances, office, and temporary facilities at the Site, and hand tools not owned by the workers, which are consumed in the performance of the Work, and cost, less market value, of such items used but not consumed which remain the property of Contractor.
 - c. Rentals of all construction equipment and machinery, and the parts thereof whether rented from Contractor or others in accordance with rental agreements approved by Owner with the advice of Engineer, and the costs of transportation, loading, unloading, assembly, dismantling, and removal thereof. All such costs shall be in accordance with the terms of said rental agreements. The rental of any such equipment, machinery, or parts shall cease when the use thereof is no longer necessary for the Work.
 - d. Sales, consumer, use, and other similar taxes related to the Work, and for which Contractor is liable, as imposed by Laws and Regulations.
 - e. Deposits lost for causes other than negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, and royalty payments and fees for permits and licenses.

- f. Losses and damages (and related expenses) caused by damage to the Work, not compensated by insurance or otherwise, sustained by Contractor in connection with the performance of the Work (except losses and damages within the deductible amounts of property insurance established in accordance with Paragraph 5.06.D), provided such losses and damages have resulted from causes other than the negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable. Such losses shall include settlements made with the written consent and approval of Owner. No such losses, damages, and expenses shall be included in the Cost of the Work for the purpose of determining Contractor's fee.
- g. The cost of utilities, fuel, and sanitary facilities at the Site.
- h. Minor expenses such as telegrams, long distance telephone calls, telephone service at the Site, express and courier services, and similar petty cash items in connection with the Work.
- i. The costs of premiums for all bonds and insurance Contractor is required by the Contract Documents to purchase and maintain.

B. *Costs Excluded:* The term Cost of the Work shall not include any of the following items:

- 1. Payroll costs and other compensation of Contractor's officers, executives, principals (of partnerships and sole proprietorships), general managers, safety managers, engineers, architects, estimators, attorneys, auditors, accountants, purchasing and contracting agents, expeditors, timekeepers, clerks, and other personnel employed by Contractor, whether at the Site or in Contractor's principal or branch office for general administration of the Work and not specifically included in the agreed upon schedule of job classifications referred to in Paragraph 11.01.A.1 or specifically covered by Paragraph 11.01.A.4, all of which are to be considered administrative costs covered by the Contractor's fee.
- 2. Expenses of Contractor's principal and branch offices other than Contractor's office at the Site.
- 3. Any part of Contractor's capital expenses, including interest on Contractor's capital employed for the Work and charges against Contractor for delinquent payments.
- 4. Costs due to the negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, including but not limited to, the correction of defective Work, disposal of materials or equipment wrongly supplied, and making good any damage to property.
- 5. Other overhead or general expense costs of any kind and the costs of any item not specifically and expressly included in Paragraphs 11.01.A.

C. *Contractor's Fee:* When all the Work is performed on the basis of cost-plus, Contractor's fee shall be determined as set forth in the Agreement. When the value of any Work covered by a Change Order or when a Claim for an adjustment in Contract Price is determined on the basis of Cost of the Work, Contractor's fee shall be determined as set forth in Paragraph 12.01.C.

- D. *Documentation:* Whenever the Cost of the Work for any purpose is to be determined pursuant to Paragraphs 11.01.A and 11.01.B, Contractor will establish and maintain records thereof in accordance with generally accepted accounting practices and submit in a form acceptable to Engineer an itemized cost breakdown together with supporting data.

11.02 Allowances

- A. It is understood that Contractor has included in the Contract Price all allowances so named in the Contract Documents and shall cause the Work so covered to be performed for such sums and by such persons or entities as may be acceptable to Owner and Engineer.

B. *Cash Allowances:*

1. Contractor agrees that:

- a. the cash allowances include the cost to Contractor (less any applicable trade discounts) of materials and equipment required by the allowances to be delivered at the Site, and all applicable taxes; and
- b. Contractor's costs for unloading and handling on the Site, labor, installation, overhead, profit, and other expenses contemplated for the cash allowances have been included in the Contract Price and not in the allowances, and no demand for additional payment on account of any of the foregoing will be valid.

C. *Contingency Allowance:*

1. Contractor agrees that a contingency allowance, if any, is for the sole use of Owner to cover unanticipated costs.

- D. Prior to final payment, an appropriate Change Order will be issued as recommended by Engineer to reflect actual amounts due Contractor on account of Work covered by allowances, and the Contract Price shall be correspondingly adjusted.

11.03 Unit Price Work

- A. Where the Contract Documents provide that all or part of the Work is to be Unit Price Work, initially the Contract Price will be deemed to include for all Unit Price Work an amount equal to the sum of the unit price for each separately identified item of Unit Price Work times the estimated quantity of each item as indicated in the Agreement.
- B. The estimated quantities of items of Unit Price Work are not guaranteed and are solely for the purpose of comparison of Bids and determining an initial Contract Price. Determinations of the actual quantities and classifications of Unit Price Work performed by Contractor will be made by Engineer subject to the provisions of Paragraph 9.07.
- C. Each unit price will be deemed to include an amount considered by Contractor to be adequate to cover Contractor's overhead and profit for each separately identified item.

- D. Owner or Contractor may make a Claim for an adjustment in the Contract Price in accordance with Paragraph 10.05 if:
1. the quantity of any item of Unit Price Work performed by Contractor differs materially and significantly from the estimated quantity of such item indicated in the Agreement; and
 2. there is no corresponding adjustment with respect to any other item of Work; and
 3. Contractor believes that Contractor is entitled to an increase in Contract Price as a result of having incurred additional expense or Owner believes that Owner is entitled to a decrease in Contract Price and the parties are unable to agree as to the amount of any such increase or decrease.

ARTICLE 12 – CHANGE OF CONTRACT PRICE; CHANGE OF CONTRACT TIMES

12.01 *Change of Contract Price*

- A. The Contract Price may only be changed by a Change Order. Any Claim for an adjustment in the Contract Price shall be based on written notice submitted by the party making the Claim to the Engineer and the other party to the Contract in accordance with the provisions of Paragraph 10.05.
- B. The value of any Work covered by a Change Order or of any Claim for an adjustment in the Contract Price will be determined as follows:
1. where the Work involved is covered by unit prices contained in the Contract Documents, by application of such unit prices to the quantities of the items involved (subject to the provisions of Paragraph 11.03); or
 2. where the Work involved is not covered by unit prices contained in the Contract Documents, by a mutually agreed lump sum (which may include an allowance for overhead and profit not necessarily in accordance with Paragraph 12.01.C.2); or
 3. where the Work involved is not covered by unit prices contained in the Contract Documents and agreement to a lump sum is not reached under Paragraph 12.01.B.2, on the basis of the Cost of the Work (determined as provided in Paragraph 11.01) plus a Contractor's fee for overhead and profit (determined as provided in Paragraph 12.01.C).
- C. *Contractor's Fee:* The Contractor's fee for overhead and profit shall be determined as follows:
1. a mutually acceptable fixed fee; or
 2. if a fixed fee is not agreed upon, then a fee based on the following percentages of the various portions of the Cost of the Work:
 - a. for costs incurred under Paragraphs 11.01.A.1 and 11.01.A.2, the Contractor's fee shall be 15 percent;
 - b. for costs incurred under Paragraph 11.01.A.3, the Contractor's fee shall be five percent;

- c. where one or more tiers of subcontracts are on the basis of Cost of the Work plus a fee and no fixed fee is agreed upon, the intent of Paragraphs 12.01.C.2.a and 12.01.C.2.b is that the Subcontractor who actually performs the Work, at whatever tier, will be paid a fee of 15 percent of the costs incurred by such Subcontractor under Paragraphs 11.01.A.1 and 11.01.A.2 and that any higher tier Subcontractor and Contractor will each be paid a fee of five percent of the amount paid to the next lower tier Subcontractor;
- d. no fee shall be payable on the basis of costs itemized under Paragraphs 11.01.A.4, 11.01.A.5, and 11.01.B;
- e. the amount of credit to be allowed by Contractor to Owner for any change which results in a net decrease in cost will be the amount of the actual net decrease in cost plus a deduction in Contractor's fee by an amount equal to five percent of such net decrease; and
- f. when both additions and credits are involved in any one change, the adjustment in Contractor's fee shall be computed on the basis of the net change in accordance with Paragraphs 12.01.C.2.a through 12.01.C.2.e, inclusive.

12.02 *Change of Contract Times*

- A. The Contract Times may only be changed by a Change Order. Any Claim for an adjustment in the Contract Times shall be based on written notice submitted by the party making the Claim to the Engineer and the other party to the Contract in accordance with the provisions of Paragraph 10.05.
- B. Any adjustment of the Contract Times covered by a Change Order or any Claim for an adjustment in the Contract Times will be determined in accordance with the provisions of this Article 12.

12.03 *Delays*

- A. Where Contractor is prevented from completing any part of the Work within the Contract Times due to delay beyond the control of Contractor, the Contract Times will be extended in an amount equal to the time lost due to such delay if a Claim is made therefor as provided in Paragraph 12.02.A. Delays beyond the control of Contractor shall include, but not be limited to, acts or neglect by Owner, acts or neglect of utility owners or other contractors performing other work as contemplated by Article 7, fires, floods, epidemics, abnormal weather conditions, or acts of God.
- B. If Owner, Engineer, or other contractors or utility owners performing other work for Owner as contemplated by Article 7, or anyone for whom Owner is responsible, delays, disrupts, or interferes with the performance or progress of the Work, then Contractor shall be entitled to an equitable adjustment in the Contract Price or the Contract Times, or both. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.
- C. If Contractor is delayed in the performance or progress of the Work by fire, flood, epidemic, abnormal weather conditions, acts of God, acts or failures to act of utility owners not under the

control of Owner, or other causes not the fault of and beyond control of Owner and Contractor, then Contractor shall be entitled to an equitable adjustment in Contract Times, if such adjustment is essential to Contractor's ability to complete the Work within the Contract Times. Such an adjustment shall be Contractor's sole and exclusive remedy for the delays described in this Paragraph 12.03.C.

- D. Owner, Engineer, and their officers, directors, members, partners, employees, agents, consultants, or subcontractors shall not be liable to Contractor for any claims, costs, losses, or damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) sustained by Contractor on or in connection with any other project or anticipated project.
- E. Contractor shall not be entitled to an adjustment in Contract Price or Contract Times for delays within the control of Contractor. Delays attributable to and within the control of a Subcontractor or Supplier shall be deemed to be delays within the control of Contractor.

ARTICLE 13 – TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK

13.01 *Notice of Defects*

- A. Prompt notice of all defective Work of which Owner or Engineer has actual knowledge will be given to Contractor. Defective Work may be rejected, corrected, or accepted as provided in this Article 13.

13.02 *Access to Work*

- A. Owner, Engineer, their consultants and other representatives and personnel of Owner, independent testing laboratories, and governmental agencies with jurisdictional interests will have access to the Site and the Work at reasonable times for their observation, inspection, and testing. Contractor shall provide them proper and safe conditions for such access and advise them of Contractor's safety procedures and programs so that they may comply therewith as applicable.

13.03 *Tests and Inspections*

- A. Contractor shall give Engineer timely notice of readiness of the Work for all required inspections, tests, or approvals and shall cooperate with inspection and testing personnel to facilitate required inspections or tests.
- B. Owner shall employ and pay for the services of an independent testing laboratory to perform all inspections, tests, or approvals required by the Contract Documents except:
 - 1. for inspections, tests, or approvals covered by Paragraphs 13.03.C and 13.03.D below;
 - 2. that costs incurred in connection with tests or inspections conducted pursuant to Paragraph 13.04.B shall be paid as provided in Paragraph 13.04.C; and
 - 3. as otherwise specifically provided in the Contract Documents.

- C. If Laws or Regulations of any public body having jurisdiction require any Work (or part thereof) specifically to be inspected, tested, or approved by an employee or other representative of such public body, Contractor shall assume full responsibility for arranging and obtaining such inspections, tests, or approvals, pay all costs in connection therewith, and furnish Engineer the required certificates of inspection or approval.
- D. Contractor shall be responsible for arranging and obtaining and shall pay all costs in connection with any inspections, tests, or approvals required for Owner's and Engineer's acceptance of materials or equipment to be incorporated in the Work; or acceptance of materials, mix designs, or equipment submitted for approval prior to Contractor's purchase thereof for incorporation in the Work. Such inspections, tests, or approvals shall be performed by organizations acceptable to Owner and Engineer.
- E. If any Work (or the work of others) that is to be inspected, tested, or approved is covered by Contractor without written concurrence of Engineer, Contractor shall, if requested by Engineer, uncover such Work for observation.
- F. Uncovering Work as provided in Paragraph 13.03.E shall be at Contractor's expense unless Contractor has given Engineer timely notice of Contractor's intention to cover the same and Engineer has not acted with reasonable promptness in response to such notice.

13.04 *Uncovering Work*

- A. If any Work is covered contrary to the written request of Engineer, it must, if requested by Engineer, be uncovered for Engineer's observation and replaced at Contractor's expense.
- B. If Engineer considers it necessary or advisable that covered Work be observed by Engineer or inspected or tested by others, Contractor, at Engineer's request, shall uncover, expose, or otherwise make available for observation, inspection, or testing as Engineer may require, that portion of the Work in question, furnishing all necessary labor, material, and equipment.
- C. If it is found that the uncovered Work is defective, Contractor shall pay all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such uncovering, exposure, observation, inspection, and testing, and of satisfactory replacement or reconstruction (including but not limited to all costs of repair or replacement of work of others); and Owner shall be entitled to an appropriate decrease in the Contract Price. If the parties are unable to agree as to the amount thereof, Owner may make a Claim therefor as provided in Paragraph 10.05.
- D. If the uncovered Work is not found to be defective, Contractor shall be allowed an increase in the Contract Price or an extension of the Contract Times, or both, directly attributable to such uncovering, exposure, observation, inspection, testing, replacement, and reconstruction. If the parties are unable to agree as to the amount or extent thereof, Contractor may make a Claim therefor as provided in Paragraph 10.05.

13.05 *Owner May Stop the Work*

- A. If the Work is defective, or Contractor fails to supply sufficient skilled workers or suitable materials or equipment, or fails to perform the Work in such a way that the completed Work will conform to the Contract Documents, Owner may order Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of Owner to stop the Work shall not give rise to any duty on the part of Owner to exercise this right for the benefit of Contractor, any Subcontractor, any Supplier, any other individual or entity, or any surety for, or employee or agent of any of them.

13.06 *Correction or Removal of Defective Work*

- A. Promptly after receipt of written notice, Contractor shall correct all defective Work, whether or not fabricated, installed, or completed, or, if the Work has been rejected by Engineer, remove it from the Project and replace it with Work that is not defective. Contractor shall pay all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such correction or removal (including but not limited to all costs of repair or replacement of work of others).
- B. When correcting defective Work under the terms of this Paragraph 13.06 or Paragraph 13.07, Contractor shall take no action that would void or otherwise impair Owner's special warranty and guarantee, if any, on said Work.

13.07 *Correction Period*

- A. If within one year after the date of Substantial Completion (or such longer period of time as may be prescribed by the terms of any applicable special guarantee required by the Contract Documents) or by any specific provision of the Contract Documents, any Work is found to be defective, or if the repair of any damages to the land or areas made available for Contractor's use by Owner or permitted by Laws and Regulations as contemplated in Paragraph 6.11.A is found to be defective, Contractor shall promptly, without cost to Owner and in accordance with Owner's written instructions:
 - 1. repair such defective land or areas; or
 - 2. correct such defective Work; or
 - 3. if the defective Work has been rejected by Owner, remove it from the Project and replace it with Work that is not defective, and
 - 4. satisfactorily correct or repair or remove and replace any damage to other Work, to the work of others or other land or areas resulting therefrom.
- B. If Contractor does not promptly comply with the terms of Owner's written instructions, or in an emergency where delay would cause serious risk of loss or damage, Owner may have the defective Work corrected or repaired or may have the rejected Work removed and replaced. All claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute

resolution costs) arising out of or relating to such correction or repair or such removal and replacement (including but not limited to all costs of repair or replacement of work of others) will be paid by Contractor.

- C. In special circumstances where a particular item of equipment is placed in continuous service before Substantial Completion of all the Work, the correction period for that item may start to run from an earlier date if so provided in the Specifications.
- D. Where defective Work (and damage to other Work resulting therefrom) has been corrected or removed and replaced under this Paragraph 13.07, the correction period hereunder with respect to such Work will be extended for an additional period of one year after such correction or removal and replacement has been satisfactorily completed.
- E. Contractor's obligations under this Paragraph 13.07 are in addition to any other obligation or warranty. The provisions of this Paragraph 13.07 shall not be construed as a substitute for, or a waiver of, the provisions of any applicable statute of limitation or repose.

13.08 *Acceptance of Defective Work*

- A. If, instead of requiring correction or removal and replacement of defective Work, Owner (and, prior to Engineer's recommendation of final payment, Engineer) prefers to accept it, Owner may do so. Contractor shall pay all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) attributable to Owner's evaluation of and determination to accept such defective Work (such costs to be approved by Engineer as to reasonableness) and for the diminished value of the Work to the extent not otherwise paid by Contractor pursuant to this sentence. If any such acceptance occurs prior to Engineer's recommendation of final payment, a Change Order will be issued incorporating the necessary revisions in the Contract Documents with respect to the Work, and Owner shall be entitled to an appropriate decrease in the Contract Price, reflecting the diminished value of Work so accepted. If the parties are unable to agree as to the amount thereof, Owner may make a Claim therefor as provided in Paragraph 10.05. If the acceptance occurs after such recommendation, an appropriate amount will be paid by Contractor to Owner.

13.09 *Owner May Correct Defective Work*

- A. If Contractor fails within a reasonable time after written notice from Engineer to correct defective Work, or to remove and replace rejected Work as required by Engineer in accordance with Paragraph 13.06.A, or if Contractor fails to perform the Work in accordance with the Contract Documents, or if Contractor fails to comply with any other provision of the Contract Documents, Owner may, after seven days written notice to Contractor, correct, or remedy any such deficiency.
- B. In exercising the rights and remedies under this Paragraph 13.09, Owner shall proceed expeditiously. In connection with such corrective or remedial action, Owner may exclude Contractor from all or part of the Site, take possession of all or part of the Work and suspend Contractor's services related thereto, take possession of Contractor's tools, appliances, construction equipment and machinery at the Site, and incorporate in the Work all materials and

equipment stored at the Site or for which Owner has paid Contractor but which are stored elsewhere. Contractor shall allow Owner, Owner's representatives, agents and employees, Owner's other contractors, and Engineer and Engineer's consultants access to the Site to enable Owner to exercise the rights and remedies under this Paragraph.

- C. All claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) incurred or sustained by Owner in exercising the rights and remedies under this Paragraph 13.09 will be charged against Contractor, and a Change Order will be issued incorporating the necessary revisions in the Contract Documents with respect to the Work; and Owner shall be entitled to an appropriate decrease in the Contract Price. If the parties are unable to agree as to the amount of the adjustment, Owner may make a Claim therefor as provided in Paragraph 10.05. Such claims, costs, losses and damages will include but not be limited to all costs of repair, or replacement of work of others destroyed or damaged by correction, removal, or replacement of Contractor's defective Work.
- D. Contractor shall not be allowed an extension of the Contract Times because of any delay in the performance of the Work attributable to the exercise by Owner of Owner's rights and remedies under this Paragraph 13.09.

ARTICLE 14 – PAYMENTS TO CONTRACTOR AND COMPLETION

14.01 *Schedule of Values*

- A. The Schedule of Values established as provided in Paragraph 2.07.A will serve as the basis for progress payments and will be incorporated into a form of Application for Payment acceptable to Engineer. Progress payments on account of Unit Price Work will be based on the number of units completed.

14.02 *Progress Payments*

A. *Applications for Payments:*

1. At least 20 days before the date established in the Agreement for each progress payment (but not more often than once a month), Contractor shall submit to Engineer for review an Application for Payment filled out and signed by Contractor covering the Work completed as of the date of the Application and accompanied by such supporting documentation as is required by the Contract Documents. If payment is requested on the basis of materials and equipment not incorporated in the Work but delivered and suitably stored at the Site or at another location agreed to in writing, the Application for Payment shall also be accompanied by a bill of sale, invoice, or other documentation warranting that Owner has received the materials and equipment free and clear of all Liens and evidence that the materials and equipment are covered by appropriate property insurance or other arrangements to protect Owner's interest therein, all of which must be satisfactory to Owner.
2. Beginning with the second Application for Payment, each Application shall include an affidavit of Contractor stating that all previous progress payments received on account of the

Work have been applied on account to discharge Contractor's legitimate obligations associated with prior Applications for Payment.

3. The amount of retainage with respect to progress payments will be as stipulated in the Agreement.

B. Review of Applications:

1. Engineer will, within 10 days after receipt of each Application for Payment, either indicate in writing a recommendation of payment and present the Application to Owner or return the Application to Contractor indicating in writing Engineer's reasons for refusing to recommend payment. In the latter case, Contractor may make the necessary corrections and resubmit the Application.
2. Engineer's recommendation of any payment requested in an Application for Payment will constitute a representation by Engineer to Owner, based on Engineer's observations of the executed Work as an experienced and qualified design professional, and on Engineer's review of the Application for Payment and the accompanying data and schedules, that to the best of Engineer's knowledge, information and belief:
 - a. the Work has progressed to the point indicated;
 - b. the quality of the Work is generally in accordance with the Contract Documents (subject to an evaluation of the Work as a functioning whole prior to or upon Substantial Completion, the results of any subsequent tests called for in the Contract Documents, a final determination of quantities and classifications for Unit Price Work under Paragraph 9.07, and any other qualifications stated in the recommendation); and
 - c. the conditions precedent to Contractor's being entitled to such payment appear to have been fulfilled in so far as it is Engineer's responsibility to observe the Work.
3. By recommending any such payment Engineer will not thereby be deemed to have represented that:
 - a. inspections made to check the quality or the quantity of the Work as it has been performed have been exhaustive, extended to every aspect of the Work in progress, or involved detailed inspections of the Work beyond the responsibilities specifically assigned to Engineer in the Contract Documents; or
 - b. there may not be other matters or issues between the parties that might entitle Contractor to be paid additionally by Owner or entitle Owner to withhold payment to Contractor.
4. Neither Engineer's review of Contractor's Work for the purposes of recommending payments nor Engineer's recommendation of any payment, including final payment, will impose responsibility on Engineer:
 - a. to supervise, direct, or control the Work, or

- b. for the means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or
 - c. for Contractor's failure to comply with Laws and Regulations applicable to Contractor's performance of the Work, or
 - d. to make any examination to ascertain how or for what purposes Contractor has used the moneys paid on account of the Contract Price, or
 - e. to determine that title to any of the Work, materials, or equipment has passed to Owner free and clear of any Liens.
5. Engineer may refuse to recommend the whole or any part of any payment if, in Engineer's opinion, it would be incorrect to make the representations to Owner stated in Paragraph 14.02.B.2. Engineer may also refuse to recommend any such payment or, because of subsequently discovered evidence or the results of subsequent inspections or tests, revise or revoke any such payment recommendation previously made, to such extent as may be necessary in Engineer's opinion to protect Owner from loss because:
- a. the Work is defective, or completed Work has been damaged, requiring correction or replacement;
 - b. the Contract Price has been reduced by Change Orders;
 - c. Owner has been required to correct defective Work or complete Work in accordance with Paragraph 13.09; or
 - d. Engineer has actual knowledge of the occurrence of any of the events enumerated in Paragraph 15.02.A.

C. Payment Becomes Due:

- 1. Ten days after presentation of the Application for Payment to Owner with Engineer's recommendation, the amount recommended will (subject to the provisions of Paragraph 14.02.D) become due, and when due will be paid by Owner to Contractor.

D. Reduction in Payment:

- 1. Owner may refuse to make payment of the full amount recommended by Engineer because:
 - a. claims have been made against Owner on account of Contractor's performance or furnishing of the Work;
 - b. Liens have been filed in connection with the Work, except where Contractor has delivered a specific bond satisfactory to Owner to secure the satisfaction and discharge of such Liens;
 - c. there are other items entitling Owner to a set-off against the amount recommended; or

- d. Owner has actual knowledge of the occurrence of any of the events enumerated in Paragraphs 14.02.B.5.a through 14.02.B.5.c or Paragraph 15.02.A.
2. If Owner refuses to make payment of the full amount recommended by Engineer, Owner will give Contractor immediate written notice (with a copy to Engineer) stating the reasons for such action and promptly pay Contractor any amount remaining after deduction of the amount so withheld. Owner shall promptly pay Contractor the amount so withheld, or any adjustment thereto agreed to by Owner and Contractor, when Contractor remedies the reasons for such action.
3. Upon a subsequent determination that Owner's refusal of payment was not justified, the amount wrongfully withheld shall be treated as an amount due as determined by Paragraph 14.02.C.1 and subject to interest as provided in the Agreement.

14.03 *Contractor's Warranty of Title*

- A. Contractor warrants and guarantees that title to all Work, materials, and equipment covered by any Application for Payment, whether incorporated in the Project or not, will pass to Owner no later than the time of payment free and clear of all Liens.

14.04 *Substantial Completion*

- A. When Contractor considers the entire Work ready for its intended use Contractor shall notify Owner and Engineer in writing that the entire Work is substantially complete (except for items specifically listed by Contractor as incomplete) and request that Engineer issue a certificate of Substantial Completion.
- B. Promptly after Contractor's notification, Owner, Contractor, and Engineer shall make an inspection of the Work to determine the status of completion. If Engineer does not consider the Work substantially complete, Engineer will notify Contractor in writing giving the reasons therefor.
- C. If Engineer considers the Work substantially complete, Engineer will deliver to Owner a tentative certificate of Substantial Completion which shall fix the date of Substantial Completion. There shall be attached to the certificate a tentative list of items to be completed or corrected before final payment. Owner shall have seven days after receipt of the tentative certificate during which to make written objection to Engineer as to any provisions of the certificate or attached list. If, after considering such objections, Engineer concludes that the Work is not substantially complete, Engineer will, within 14 days after submission of the tentative certificate to Owner, notify Contractor in writing, stating the reasons therefor. If, after consideration of Owner's objections, Engineer considers the Work substantially complete, Engineer will, within said 14 days, execute and deliver to Owner and Contractor a definitive certificate of Substantial Completion (with a revised tentative list of items to be completed or corrected) reflecting such changes from the tentative certificate as Engineer believes justified after consideration of any objections from Owner.
- D. At the time of delivery of the tentative certificate of Substantial Completion, Engineer will deliver to Owner and Contractor a written recommendation as to division of responsibilities

pending final payment between Owner and Contractor with respect to security, operation, safety, and protection of the Work, maintenance, heat, utilities, insurance, and warranties and guarantees. Unless Owner and Contractor agree otherwise in writing and so inform Engineer in writing prior to Engineer's issuing the definitive certificate of Substantial Completion, Engineer's aforesaid recommendation will be binding on Owner and Contractor until final payment.

- E. Owner shall have the right to exclude Contractor from the Site after the date of Substantial Completion subject to allowing Contractor reasonable access to remove its property and complete or correct items on the tentative list.

14.05 *Partial Utilization*

- A. Prior to Substantial Completion of all the Work, Owner may use or occupy any substantially completed part of the Work which has specifically been identified in the Contract Documents, or which Owner, Engineer, and Contractor agree constitutes a separately functioning and usable part of the Work that can be used by Owner for its intended purpose without significant interference with Contractor's performance of the remainder of the Work, subject to the following conditions:
 - 1. Owner at any time may request Contractor in writing to permit Owner to use or occupy any such part of the Work which Owner believes to be ready for its intended use and substantially complete. If and when Contractor agrees that such part of the Work is substantially complete, Contractor, Owner, and Engineer will follow the procedures of Paragraph 14.04.A through D for that part of the Work.
 - 2. Contractor at any time may notify Owner and Engineer in writing that Contractor considers any such part of the Work ready for its intended use and substantially complete and request Engineer to issue a certificate of Substantial Completion for that part of the Work.
 - 3. Within a reasonable time after either such request, Owner, Contractor, and Engineer shall make an inspection of that part of the Work to determine its status of completion. If Engineer does not consider that part of the Work to be substantially complete, Engineer will notify Owner and Contractor in writing giving the reasons therefor. If Engineer considers that part of the Work to be substantially complete, the provisions of Paragraph 14.04 will apply with respect to certification of Substantial Completion of that part of the Work and the division of responsibility in respect thereof and access thereto.
 - 4. No use or occupancy or separate operation of part of the Work may occur prior to compliance with the requirements of Paragraph 5.10 regarding property insurance.

14.06 *Final Inspection*

- A. Upon written notice from Contractor that the entire Work or an agreed portion thereof is complete, Engineer will promptly make a final inspection with Owner and Contractor and will notify Contractor in writing of all particulars in which this inspection reveals that the Work is incomplete or defective. Contractor shall immediately take such measures as are necessary to complete such Work or remedy such deficiencies.

14.07 *Final Payment*

A. Application for Payment:

1. After Contractor has, in the opinion of Engineer, satisfactorily completed all corrections identified during the final inspection and has delivered, in accordance with the Contract Documents, all maintenance and operating instructions, schedules, guarantees, bonds, certificates or other evidence of insurance, certificates of inspection, marked-up record documents (as provided in Paragraph 6.12), and other documents, Contractor may make application for final payment following the procedure for progress payments.
2. The final Application for Payment shall be accompanied (except as previously delivered) by:
 - a. all documentation called for in the Contract Documents, including but not limited to the evidence of insurance required by Paragraph 5.04.B.6;
 - b. consent of the surety, if any, to final payment;
 - c. a list of all Claims against Owner that Contractor believes are unsettled; and
 - d. complete and legally effective releases or waivers (satisfactory to Owner) of all Lien rights arising out of or Liens filed in connection with the Work.
3. In lieu of the releases or waivers of Liens specified in Paragraph 14.07.A.2 and as approved by Owner, Contractor may furnish receipts or releases in full and an affidavit of Contractor that: (i) the releases and receipts include all labor, services, material, and equipment for which a Lien could be filed; and (ii) all payrolls, material and equipment bills, and other indebtedness connected with the Work for which Owner might in any way be responsible, or which might in any way result in liens or other burdens on Owner's property, have been paid or otherwise satisfied. If any Subcontractor or Supplier fails to furnish such a release or receipt in full, Contractor may furnish a bond or other collateral satisfactory to Owner to indemnify Owner against any Lien.

B. Engineer's Review of Application and Acceptance:

1. If, on the basis of Engineer's observation of the Work during construction and final inspection, and Engineer's review of the final Application for Payment and accompanying documentation as required by the Contract Documents, Engineer is satisfied that the Work has been completed and Contractor's other obligations under the Contract Documents have been fulfilled, Engineer will, within ten days after receipt of the final Application for Payment, indicate in writing Engineer's recommendation of payment and present the Application for Payment to Owner for payment. At the same time Engineer will also give written notice to Owner and Contractor that the Work is acceptable subject to the provisions of Paragraph 14.09. Otherwise, Engineer will return the Application for Payment to Contractor, indicating in writing the reasons for refusing to recommend final payment, in which case Contractor shall make the necessary corrections and resubmit the Application for Payment.

C. Payment Becomes Due:

1. Thirty days after the presentation to Owner of the Application for Payment and accompanying documentation, the amount recommended by Engineer, less any sum Owner is entitled to set off against Engineer's recommendation, including but not limited to liquidated damages, will become due and will be paid by Owner to Contractor.

14.08 *Final Completion Delayed*

- A. If, through no fault of Contractor, final completion of the Work is significantly delayed, and if Engineer so confirms, Owner shall, upon receipt of Contractor's final Application for Payment (for Work fully completed and accepted) and recommendation of Engineer, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed and accepted. If the remaining balance to be held by Owner for Work not fully completed or corrected is less than the retainage stipulated in the Agreement, and if bonds have been furnished as required in Paragraph 5.01, the written consent of the surety to the payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by Contractor to Engineer with the Application for such payment. Such payment shall be made under the terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

14.09 *Waiver of Claims*

- A. The making and acceptance of final payment will constitute:
 1. a waiver of all Claims by Owner against Contractor, except Claims arising from unsettled Liens, from defective Work appearing after final inspection pursuant to Paragraph 14.06, from failure to comply with the Contract Documents or the terms of any special guarantees specified therein, or from Contractor's continuing obligations under the Contract Documents; and
 2. a waiver of all Claims by Contractor against Owner other than those previously made in accordance with the requirements herein and expressly acknowledged by Owner in writing as still unsettled.

ARTICLE 15 – SUSPENSION OF WORK AND TERMINATION

15.01 *Owner May Suspend Work*

- A. At any time and without cause, Owner may suspend the Work or any portion thereof for a period of not more than 90 consecutive days by notice in writing to Contractor and Engineer which will fix the date on which Work will be resumed. Contractor shall resume the Work on the date so fixed. Contractor shall be granted an adjustment in the Contract Price or an extension of the Contract Times, or both, directly attributable to any such suspension if Contractor makes a Claim therefor as provided in Paragraph 10.05.

15.02 *Owner May Terminate for Cause*

- A. The occurrence of any one or more of the following events will justify termination for cause:

1. Contractor's persistent failure to perform the Work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the Progress Schedule established under Paragraph 2.07 as adjusted from time to time pursuant to Paragraph 6.04);
 2. Contractor's disregard of Laws or Regulations of any public body having jurisdiction;
 3. Contractor's repeated disregard of the authority of Engineer; or
 4. Contractor's violation in any substantial way of any provisions of the Contract Documents.
- B. If one or more of the events identified in Paragraph 15.02.A occur, Owner may, after giving Contractor (and surety) seven days written notice of its intent to terminate the services of Contractor:
1. exclude Contractor from the Site, and take possession of the Work and of all Contractor's tools, appliances, construction equipment, and machinery at the Site, and use the same to the full extent they could be used by Contractor (without liability to Contractor for trespass or conversion);
 2. incorporate in the Work all materials and equipment stored at the Site or for which Owner has paid Contractor but which are stored elsewhere; and
 3. complete the Work as Owner may deem expedient.
- C. If Owner proceeds as provided in Paragraph 15.02.B, Contractor shall not be entitled to receive any further payment until the Work is completed. If the unpaid balance of the Contract Price exceeds all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) sustained by Owner arising out of or relating to completing the Work, such excess will be paid to Contractor. If such claims, costs, losses, and damages exceed such unpaid balance, Contractor shall pay the difference to Owner. Such claims, costs, losses, and damages incurred by Owner will be reviewed by Engineer as to their reasonableness and, when so approved by Engineer, incorporated in a Change Order. When exercising any rights or remedies under this Paragraph, Owner shall not be required to obtain the lowest price for the Work performed.
- D. Notwithstanding Paragraphs 15.02.B and 15.02.C, Contractor's services will not be terminated if Contractor begins within seven days of receipt of notice of intent to terminate to correct its failure to perform and proceeds diligently to cure such failure within no more than 30 days of receipt of said notice.
- E. Where Contractor's services have been so terminated by Owner, the termination will not affect any rights or remedies of Owner against Contractor then existing or which may thereafter accrue. Any retention or payment of moneys due Contractor by Owner will not release Contractor from liability.

- F. If and to the extent that Contractor has provided a performance bond under the provisions of Paragraph 5.01.A, the termination procedures of that bond shall supersede the provisions of Paragraphs 15.02.B and 15.02.C.

15.03 *Owner May Terminate For Convenience*

- A. Upon seven days written notice to Contractor and Engineer, Owner may, without cause and without prejudice to any other right or remedy of Owner, terminate the Contract. In such case, Contractor shall be paid for (without duplication of any items):
1. completed and acceptable Work executed in accordance with the Contract Documents prior to the effective date of termination, including fair and reasonable sums for overhead and profit on such Work;
 2. expenses sustained prior to the effective date of termination in performing services and furnishing labor, materials, or equipment as required by the Contract Documents in connection with uncompleted Work, plus fair and reasonable sums for overhead and profit on such expenses;
 3. all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) incurred in settlement of terminated contracts with Subcontractors, Suppliers, and others; and
 4. reasonable expenses directly attributable to termination.
- B. Contractor shall not be paid on account of loss of anticipated profits or revenue or other economic loss arising out of or resulting from such termination.

15.04 *Contractor May Stop Work or Terminate*

- A. If, through no act or fault of Contractor, (i) the Work is suspended for more than 90 consecutive days by Owner or under an order of court or other public authority, or (ii) Engineer fails to act on any Application for Payment within 30 days after it is submitted, or (iii) Owner fails for 30 days to pay Contractor any sum finally determined to be due, then Contractor may, upon seven days written notice to Owner and Engineer, and provided Owner or Engineer do not remedy such suspension or failure within that time, terminate the Contract and recover from Owner payment on the same terms as provided in Paragraph 15.03.
- B. In lieu of terminating the Contract and without prejudice to any other right or remedy, if Engineer has failed to act on an Application for Payment within 30 days after it is submitted, or Owner has failed for 30 days to pay Contractor any sum finally determined to be due, Contractor may, seven days after written notice to Owner and Engineer, stop the Work until payment is made of all such amounts due Contractor, including interest thereon. The provisions of this Paragraph 15.04 are not intended to preclude Contractor from making a Claim under Paragraph 10.05 for an adjustment in Contract Price or Contract Times or otherwise for expenses or damage directly attributable to Contractor's stopping the Work as permitted by this Paragraph.

ARTICLE 16 – DISPUTE RESOLUTION

16.01 *Methods and Procedures*

- A. Either Owner or Contractor may request mediation of any Claim submitted to Engineer for a decision under Paragraph 10.05 before such decision becomes final and binding. The mediation will be governed by the Construction Industry Mediation Rules of the American Arbitration Association in effect as of the Effective Date of the Agreement. The request for mediation shall be submitted in writing to the American Arbitration Association and the other party to the Contract. Timely submission of the request shall stay the effect of Paragraph 10.05.E.
- B. Owner and Contractor shall participate in the mediation process in good faith. The process shall be concluded within 60 days of filing of the request. The date of termination of the mediation shall be determined by application of the mediation rules referenced above.
- C. If the Claim is not resolved by mediation, Engineer's action under Paragraph 10.05.C or a denial pursuant to Paragraphs 10.05.C.3 or 10.05.D shall become final and binding 30 days after termination of the mediation unless, within that time period, Owner or Contractor:
 - 1. elects in writing to invoke any dispute resolution process provided for in the Supplementary Conditions; or
 - 2. agrees with the other party to submit the Claim to another dispute resolution process; or
 - 3. gives written notice to the other party of the intent to submit the Claim to a court of competent jurisdiction.

ARTICLE 17 – MISCELLANEOUS

17.01 *Giving Notice*

- A. Whenever any provision of the Contract Documents requires the giving of written notice, it will be deemed to have been validly given if:
 - 1. delivered in person to the individual or to a member of the firm or to an officer of the corporation for whom it is intended; or
 - 2. delivered at or sent by registered or certified mail, postage prepaid, to the last business address known to the giver of the notice.

17.02 *Computation of Times*

- A. When any period of time is referred to in the Contract Documents by days, it will be computed to exclude the first and include the last day of such period. If the last day of any such period falls on a Saturday or Sunday or on a day made a legal holiday by the law of the applicable jurisdiction, such day will be omitted from the computation.

17.03 *Cumulative Remedies*

- A. The duties and obligations imposed by these General Conditions and the rights and remedies available hereunder to the parties hereto are in addition to, and are not to be construed in any way as a limitation of, any rights and remedies available to any or all of them which are otherwise imposed or available by Laws or Regulations, by special warranty or guarantee, or by other provisions of the Contract Documents. The provisions of this Paragraph will be as effective as if repeated specifically in the Contract Documents in connection with each particular duty, obligation, right, and remedy to which they apply.

17.04 *Survival of Obligations*

- A. All representations, indemnifications, warranties, and guarantees made in, required by, or given in accordance with the Contract Documents, as well as all continuing obligations indicated in the Contract Documents, will survive final payment, completion, and acceptance of the Work or termination or completion of the Contract or termination of the services of Contractor.

17.05 *Controlling Law*

- A. This Contract is to be governed by the law of the state in which the Project is located.

17.06 *Headings*

- A. Article and paragraph headings are inserted for convenience only and do not constitute parts of these General Conditions.

H:\SPEC\CT STND PARTS - Ohio\General Conditions - EJCDC C-700 Standard General Conditions 2007.pdf

SECTION 4
SUPPLEMENTARY CONDITIONS

SUPPLEMENTARY CONDITIONS

These Supplementary Conditions amend or supplement the Standard General Conditions of the Construction Contract (EJCDC C-700, 2007 ed.) and other provisions of the Contract Documents as indicated below. All provisions which are not so amended or supplemented herein or in the Specific Project Requirements remain in full force and effect.

SC-1.01 The terms used in these Supplementary Conditions which are defined in the General Conditions have the meaning assigned to them in the General Conditions.

SC-2.02 Delete paragraph 2.02(A) in its entirety and insert the following in its place:

Owner shall furnish one (1) printed/hard copy of the drawings and Project Manual which shall be an executed contract set and one set in electronic format (.pdf), if requested.

SC-2.03 (A) In the last sentence of 2.03A, change "sixtieth day" to "one hundred fiftieth day."

SC-2.03 (B) By submission of a bid, the bidder hereby grants consent that the award and execution period shall be extended from 60 days to 120 days after the date on which the bids are opened.

SC-4.02(A) Change "Supplementary Conditions" to read "Specific Project Requirements."

SC-4.06(G) Delete paragraph 4.06(G) in its entirety.

SC-5.03(A)(1) The required Certificate of Insurance shall be in a form satisfactory to the Owner (most current version of ACORD 25 or approved equal). If the Contractor fails to procure and maintain any specified and/or required insurance, the Owner shall have the right to procure and maintain the said insurance for and in the name of the Contractor and the Contractor shall pay the cost thereof and shall furnish all necessary information to make effective and maintain such insurance.

SC-5.04(B)(1) Change "Supplementary Conditions" to read "Specific Project Requirements."

SC-5.04(B)(2) The limits of liability for the insurance required by paragraph 5.04(A) of the General Conditions shall provide coverage for not less than the following amounts or greater where required by Laws and Regulations:

All of the limits below may be satisfied with an Umbrella/Excess Liability as needed to increase the Primary Policy to required limits.

5.04(A)(1) and (2) Workers' Compensation, etc., under paragraphs 5.04(A)(1) and 5.04(A)(2) of the General Conditions:

- | | |
|--|-------------|
| (a) State | Statutory |
| (b) Applicable Federal (e.g., Longshoreman's): | Statutory |
| (c) Employer's Liability: | \$1,000,000 |

5.04(A)(3), (4) and (5). Contractor's Liability Insurance under paragraphs 5.04(A)(3) through 5.04(A)(5) of the General Conditions which shall also include completed operations and product liability coverage.

- (a) Bodily Injury and Property Damage, Combined Single Limit (CSL) (Except Products and Completed Operations) Property Damage liability insurance will provide Explosion, Collapse, and Underground coverage where applicable.

Each Occurrence	\$2,000,000
-----------------	-------------

General Aggregate	\$4,000,000
-------------------	-------------

- (b) Products and Completed Operations Aggregate \$1,000,000

Products and Completed Operations to be maintained for two (2) years after final payment and Contractor shall continue to provide evidence of such coverage to the Owner on an annual basis during the aforementioned period.

- (c) Personal and Advertising Injury (Per Person/Organization and per occurrence). \$1,000,000

- (d) Fire Damage \$100,000

- (e) If the General Liability Policy includes a General Aggregate, such policy shall be endorsed to have the General Aggregate Per Project Aggregate Limit.

5.04(A)(6) Automobile Liability - (Owned, Non-Owned, Hired)
Contractor may provide split limits or combined single limit.

- (a) Split Limits:

Bodily Injury,	Each Person:	\$2,000,000
	Each Occurrence	\$2,000,000

Property Damage,	Each Occurrence	\$1,000,000
------------------	-----------------	-------------

or

- (b) Combined Single Limit

Bodily Injury and Property Damage,	
Each Occurrence	\$2,000,000

SC-5.04(B)(3) Add the following to the end of the paragraph: “to the extent available in the insurance industry with industry standard exclusions and as allowed under the laws and regulations in the State of Ohio;”

SC-5.04(B)(4) Add the following:

Written notice of cancellation for non-payment of premium shall be at least 10 days.

Add the following section:

SC-5.04(C) Unless otherwise stated in Specific Project Requirements, the Contractor shall purchase and provide an "Owner's and Contractor's Protective Policy" with an immediate Effective Date and the **Owner listed as the Insured (No additional insureds)** for the following limits:

Each Occurrence	\$1,000,000
General Aggregate	\$2,000,000

Add the following section:

SC-5.04(D) Unless otherwise stated in Specific Project Requirements the Contractor shall purchase and maintain during the Contract Time "All Risk Builders' Risk Insurance," and/or "Installation Floater Insurance," and/or "Boiler and Machinery Insurance," and any and all insurance requirements of section GC-5.06 of the General Conditions as applicable for the type of work to be performed upon the Project to the full insurable value thereof for the benefit of the Owner, the Contractor, Subcontractors and Suppliers as their interest may appear. This insurance shall cover the work until final acceptance and final payment by the Owner. This provision shall in no way release the Contractor or Contractor's Surety from obligations under the Contract Documents to fully complete the Project. The original policy(s) shall be filed with the Owner or his designated representative.

SC-5.05 *Owner's Liability Insurance*

See SC-5.04(C) above.

SC-5.06 *Property Insurance*

Unless otherwise stated in Specific Project Requirements, the Contractor, not the Owner, shall purchase and maintain during the Contract Time all property insurance required in section GC-5.06 of the General Conditions and as outlined in SC-5.04(D) above.

Add the following section:

SC-6.02(C) The Contractor shall be responsible for the Owner and/or Engineer's additional inspection and administrative costs for work performed beyond regular working hours as defined in this Section.

SC-6.07(B) Delete paragraph 6.07(B) in its entirety.

SC-6.09 (D) Add the following:

D. The contractor agrees to the requirements of RC 153.59, RC 153.591, and RC 153.60.

Add the following section:

SC-6.10(B) Add the following:

Should the Owner be exempt from Ohio State Sales and Use Taxes on materials and equipment to be incorporated in the Project, the Contractor may obtain a waiver and said taxes shall not be included in the Contract Price.

1. Owner will furnish the required certificates of tax exemption to Contractor for use in the purchase of supplies and materials to be incorporated into the work
2. Owner's exemption to Contractor does not apply to construction tools, machinery, equipment, or other property by or leased by Contractor, or to supplies or materials not incorporated into the work.

The Contractor shall withhold and/or pay all consumer, use, property, employment, income and other taxes in accordance with the laws and regulations of the United States, State of Ohio, Owner and other applicable agencies which are applicable during the performance of the work.

SC-6.17 *Shop Drawings and Samples*

Add the following new paragraphs immediately after paragraph 6.17(E):

- F. Contractor shall furnish required submittals with sufficient information and accuracy in order to obtain required approval of an item with no more than three (3) submittals. Engineer will record Engineer's time for reviewing subsequent materials of shop drawings, samples, or other items requiring approval and Contractor shall reimburse Owner for Engineer's charges for such time.
- G. In the event that Contractor requests a substitution for a previously approved item, Contractor shall reimburse Owner for Engineer's charges for such time unless the need for such substitution is beyond the control of the Contractor.

SC-7.02 Delete Section 7.02 of the General Conditions in its entirety and insert the following:

SC-7.02(A) The General Construction Contractor shall be referred to and defined as the Construction Coordinator.

SC-7.02(B) Duties of the Construction Coordinator include the following:

1. Scheduling and coordinating the work of the Prime Contractors including submission and periodic updating of project schedule.

2. Establishing and administrating the site safety program and procedures for the project.
3. See that permits are applied for and obtained on a timely basis. Advise the Engineer of any problems related to permit approval.
4. Monitoring compliance with Laws and Regulations.
5. Maintain project site for dust, sedimentation, debris, waste, and general site cleanliness.
6. Coordinate location and use of temporary construction facilities including but not limited to sanitary, water, power, telephone, and parking.
7. Coordinate Owner interface for utility tie-ins/shut downs.
8. Monitor shop drawing submittal and coordination of submittal information between Prime Contractors.

SC-10.01 (A) Add the following:
The Owner may request from the Contractor and the Contractor shall provide within ten days of the request, a quote for all ordered changes in the work or work the Owner may be considering to be ordered. The quote shall be a line item, detailed, itemized breakdown of the work.

SC-11.01(A) For purposes of "Cost of the Work" delete Section 11.01(A), (B), and (C) of the General Conditions in their entirety and insert ODOT 109.05, in its place.

SC-13.07(A) In the First sentence of Section 13.07(A) remove "Substantial Completion" and insert "Final Acceptance of the entire project and final payment by the Owner."

SC-13.07(C) Remove 13.07(C) and replace with the following:

All materials and equipment shall be warranted by the respective material supplier or equipment manufacturer until the end of the Contractor's "correction period" (or longer if specified elsewhere in the contract) regardless of date of initial installation or operation of the material or equipment. The cost of such extended warranties as needed from material suppliers or equipment manufacturers to provide warranty coverage until the end of the "correction period" or other period as specified in the contract shall be the responsibility of the prime contractor and shall be assumed to have been included in his bid.

SC-14.02(A) (3) Delete Section 14.02(A) (3) of the General Conditions in its entirety and insert the following:

Until the job is Substantially Complete, the Contractor will be paid 96% of the

estimated value of labor and 100% of the estimated value of material installed and completed in acceptable form. Upon the Owner's agreement that the project is Substantially Complete, the 4% Retainage on labor may be reduced to the value needed to assure completion of the remaining punch list work subject to the recommendation of the Engineer and the approval by the Owner.

Add the following section:

SC-14.02(A) (4)

Payment for stored materials at invoice prices or at the unit price bid for materials, or the lesser value of the two, will be made for accepted nonperishable equipment and materials which are to be incorporated into the work, when accepted, delivered, properly stored, and protected upon the site and verified to the Engineer by a copy of the invoice. For materials and equipment meeting the foregoing conditions, the Owner will pay, when properly included in an approved estimate, 92% of the invoice value of the same. Subsequent to the inclusion of a payment for delivered materials in a progress payment, Contractor shall submit no later than the next payment submission, a partial waiver of lien from each and every supplier for whom delivered materials were paid. If no such waiver is submitted prior to or along with the next payment, the amount of delivered materials paid commensurate with that particular item will be deducted from future payments. No payment for delivered materials shall be made for any items that are scheduled to be incorporated in the work within 30 days of submission of the pay estimate. Delivered materials will not be paid in any given month for a total amount less than \$5,000.00. Payment for delivered materials for such items as pipe backfill and roadway subbase will not be routinely considered.

SC-16.01 Delete Article 16 in its entirety and replace with the following:

10/17

ARTICLE 16 - DISPUTE RESOLUTION AGREEMENT - JUDICIAL SYSTEM

OWNER and CONTRACTOR hereby agree that Article 16 of the General Conditions to the Agreement between OWNER and CONTRACTOR is amended to include the following agreement of the parties:

- 16.01 All claims, disputes and other matters in question between Owner and Contractor arising out of or relating to the Contract Documents or the breach thereof (except for claims which have been waived by the making or acceptance of final payment as provided by Paragraph 14.09) will be decided through the Ashtabula County Court of Common Pleas. Arbitration will be entered into only if agreed upon in writing by both parties.

END OF SECTION

09/25

SECTION 5
SPECIFICATIONS

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Project information.
2. Contract description.
3. Contractor's use of Site.
4. Work sequence.
5. Work restrictions.
6. Owner occupancy.
7. Permits.
8. Specification conventions.

B. Related Requirements:

1. Section 013216 - Construction Progress Schedule: Digital project management procedures and web-based project management software package.
2. Section 015000 - Temporary Facilities and Controls: Limitations and procedures governing temporary use of Owner's facilities.
3. Section 017000 - Execution and Closeout Requirements: Coordination of Owner-installed products.

1.2 PROJECT INFORMATION

A. Name: WWTP Clarifier Improvements – Phase 2

1. Project Location: 255 North Elm St. Jefferson, Ohio 44047.

B. Owner: Village of Jefferson

1. Owner's Representative: Gary Licate, WWTP Superintendent

C. Project Engineer: Verdantas

1. Engineer's Representative: Eric Fallon, P.E.

1.3 CONTRACT DESCRIPTION

A. BASE BID

1. The work of the project includes replacement of internal components in Clarifier 1, Clarifier 1 control panel, structural repairs to Clarifier tank 1, and replacement of the RAS pumps and RAS pump control panels.

1.4 CONTRACTOR'S USE OF SITE

- A. Limits on Use of Site: Limit use of Project Site to Work in areas indicated. Do not disturb portions of Project Site beyond areas in which the Work is indicated.

1. Limit use of Site to allow:

a. Owner occupancy.

2. Driveways, Walkways, and Entrances: Keep driveways and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or for storage of materials.

a. Schedule deliveries to minimize use of driveways and entrances by construction operations.

b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on Site.

- B. Utility Outages and Shutdown:

1. Coordinate and schedule electrical and other utility outages with Owner.
2. Outages: Allow only at previously agreed upon times.
3. At least one week before scheduled outage, submit outage request plan to Owner itemizing dates, times, and duration of each requested outage.

Construction Plan: Before start of construction, submit construction plan regarding access to Work, use of Site, and utility outages for acceptance by Owner. After acceptance of plan, construction operations shall comply with accepted plan unless deviations are accepted by Owner in writing.

1.5 WORK SEQUENCE

- A. Construct Work in order to accommodate Owner's occupancy requirements during construction period. Coordinate construction schedule and operations with the Architect/Engineer and Owner.

- B. Sequencing of Construction Plan: Before start of construction, post electronic file to Project website of construction plan regarding phasing of demolition and new Work for acceptance by Owner. After acceptance of plan, comply with accepted plan when coordinating construction sequencing unless deviations are accepted by Owner in writing.

1.6 WORK RESTRICTIONS

- A. Comply with restrictions on construction operations.

1. Comply with limitations on use of public streets, work on public streets, rights of way, and other requirements of authorities having jurisdiction (AHJ).

- B. On-Site Work Hours: Limit Work to between 7 a.m. to 5 p.m., Monday through Friday, unless otherwise indicated. Work hours may be modified to meet Project requirements if approved by Owner and AHJ.
- C. On-Site Work Day Restrictions: Do not perform Work resulting in utility shutdowns or resulting in noisy activity on Site during Work blackout days indicated by Owner.
- D. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions, and only after arranging for temporary utility services according to requirements indicated:
 - 1. Notify Owner not less than two days in advance of proposed utility interruptions.
 - 2. Obtain Owner's written permission before proceeding with utility interruptions.
- E. Noise, Vibration, Dust, and Odors: Coordinate with Owner operations that may result in high levels of noise and vibration, dust, odors, or other disruption to Owner occupancy.
 - 1. Notify Owner not less than two days in advance of proposed disruptive operations.
 - 2. Obtain Owner's written permission before proceeding with disruptive operations.

1.7 OWNER OCCUPANCY

- A. Owner will occupy Site during entire period of construction for conduct of normal operations.
- B. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- C. Schedule Work to accommodate Owner occupancy.

1.8 SPECIFICATION CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 2. Text Color: Text used in the Specifications, including units of measure, manufacturer and product names, and other text may appear in multiple colors or underlined as part of a hyperlink; no emphasis is implied by text with these characteristics.
 - 3. Hypertext: Text used in the Specifications may contain hyperlinks. Hyperlinks may allow for access to linked information that is not residing in the Specifications. Unless otherwise indicated, linked information is not part of the Contract Documents.
- B. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
 - 1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.

2. Abbreviations: Materials and products are identified by abbreviations scheduled on the Drawings.
3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 011000

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Quality assurance.
- B. Product options.
- C. Product substitution procedures.

1.2 QUALITY ASSURANCE

- A. Contract is based on products and standards established in Contract Documents without consideration of proposed substitutions.
- B. Products specified define standard of quality, type, function, dimension, appearance, and performance required. The Contractor shall prepare his bid on the particular materials and equipment specified.
- C. Substitution Proposals: Permitted for specified products except where specified otherwise. Do not substitute products unless substitution has been accepted and approved in writing by Owner. Following the award of the contract, should the Contractor desire to use other equipment and materials, he shall submit to the Owner a written request for such change and state the advantage to the Owner and the savings or additional cost involved by the proposed substitution. The determination as to whether or not such change will be permitted rests with the Owner and the Engineer. Do not substitute products unless substitution has been accepted and approved in writing by the Owner.
- D. Each major item of equipment shall be inspected by a manufacturer's representative during installation and upon completion of work. The Contractor shall supply the Engineer with a certificate of such inspection.

1.3 PRODUCT OPTIONS

- A. See Section 016000 - Product Requirements.

1.4 PRODUCT SUBSTITUTION PROCEDURES

- A. Document each request with complete data, substantiating compliance of proposed substitution with Contract Documents, including:
 - 1. Manufacturer's name and address, product, trade name, model, or catalog number, performance and test data, and reference standards.

2. Itemized point-by-point comparison of proposed substitution with specified product, listing variations in quality, performance, and other pertinent characteristics.
 3. Reference to Article and Paragraph numbers in Specification Section.
 4. Cost data comparing proposed substitution with specified product and amount of net change to Contract Sum.
 5. Changes required in other Work.
 6. Availability of maintenance service and source of replacement parts as applicable.
 7. Certified test data to show compliance with performance characteristics specified.
 8. Samples when applicable or requested.
 9. Other information as necessary to assist Architect/Engineer's evaluation.
- B. A request constitutes a representation that Contractor:
1. Has investigated proposed product and determined that it meets or exceeds quality level of specified product.
 2. Will provide same warranty for substitution as for specified product.
 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
 4. Waives claims for additional costs or time extension that may subsequently become apparent.
 5. Will coordinate installation of the accepted substitute, making such changes as may be required for the Work to be complete in all respects.
 6. Will reimburse Owner for review or redesign services associated with reapproval by authorities having jurisdiction.
- C. Substitutions will not be considered when they are indicated or implied on Shop Drawing or Product Data submittals without separate written request or when acceptance will require revision to Contract Documents.
- D. Substitution Submittal Procedure:
1. Submit requests for substitutions on CSI Form 13.1A Substitution Request-After the Bidding/Negotiating Stage.
 2. Submit electronic files to engineer of Request for Substitution for consideration. Limit each request to one proposed substitution.
 3. Submit Shop Drawings, Product Data, and certified test results attesting to proposed product equivalence. Burden of proof is on proposer.
 4. Architect/Engineer will notify Contractor in writing of decision to accept or reject request.

END OF SECTION 012500

SECTION 013000 - ADMINISTRATIVE REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Coordination and Project conditions.
- B. Preconstruction meeting.
- C. Preinstallation meetings.
- D. Closeout meeting.
- E. Alteration procedures.

1.2 COORDINATION AND PROJECT CONDITIONS

- A. Coordinate scheduling, submittals, and Work of various Sections of Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements.
- B. Verify that utility requirements and characteristics of operating equipment are compatible with building utilities. Coordinate Work of various Sections having interdependent responsibilities for installing, connecting to, and placing operating equipment in service.
- C. Coordinate space requirements, supports, and installation of mechanical and electrical Work indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit as closely as practical; place runs parallel with lines of building. Use spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
 - 1. Coordination Drawings: Prepare as required to coordinate all portions of Work. Show relationship and integration of different construction elements that require coordination during fabrication or installation to fit in space provided or to function as intended. Indicate locations where space is limited for installation and access and where sequencing and coordination of installations are important.
- D. Coordination Meetings: In addition to other meetings specified in this Section, hold coordination meetings with personnel and Subcontractors to ensure coordination of Work.
- E. In finished areas, conceal pipes, ducts, and wiring within construction. Coordinate locations of fixtures and outlets with finish elements.
- F. Coordinate completion and clean-up of Work of separate Sections in preparation for Substantial Completion.
- G. After Owner's occupancy of premises, coordinate access to Site for correction of defective Work and Work not complying with Contract Documents, to minimize disruption of Owner's activities.

1.3 PRECONSTRUCTION MEETING

- A. Engineer will schedule and preside over meeting after Notice of Award.
- B. Attendance Required: Architect/Engineer, Owner, and Contractor.
- C. Minimum Agenda:
 - 1. Execution of Owner-Contractor Agreement.
 - 2. Submission of executed bonds and insurance certificates.
 - 3. Distribution of Contract Documents.
 - 4. Submission of list of Subcontractors, list of products, schedule of values, and Progress Schedule.
 - 5. Designation of personnel representing parties in Contract, and Architect/Engineer.
 - 6. Communication procedures.
 - 7. Procedures and processing of requests for interpretations, field decisions, field orders, submittals, substitutions, Applications for Payments, proposal request, Change Orders, and Contract closeout procedures.
 - 8. Scheduling.
 - 9. Critical Work sequencing.
- D. Construction Manager: Record minutes and distribute to participants within two days after meeting, to Architect/Engineer, Owner, and those affected by decisions made.

1.4 PREINSTALLATION MEETINGS

- A. When required in individual Specification Sections, convene preinstallation meetings at Project Site before starting Work of specific Section.
- B. Require attendance of parties directly affecting, or affected by, Work of specific Section.
- C. Notify Architect/Engineer four days in advance of meeting date.
- D. Prepare agenda and preside over meeting:
 - 1. Review conditions of installation, preparation, and installation procedures.
 - 2. Review coordination with related Work.
- E. Record minutes and distribute to participants within two days after meeting to Architect/Engineer, Owner, and those affected by decisions made.

1.5 CLOSEOUT MEETING

- A. Schedule Project closeout meeting with sufficient time to prepare for requesting Substantial Completion. Preside over meeting and be responsible for minutes.
- B. Attendance Required: Contractor, major Subcontractors, Architect/Engineer, Owner, and others appropriate to agenda.
- C. Notify Architect/Engineer four days in advance of meeting date.

D. Minimum Agenda:

1. Start-up of facilities and systems.
2. Operations and maintenance manuals.
3. Testing, adjusting, and balancing.
4. System demonstration and observation.
5. Operation and maintenance instructions for Owner's personnel.
6. Contractor's inspection of Work.
7. Contractor's preparation of an initial "punch list."
8. Procedure to request Architect/Engineer inspection to determine date of Substantial Completion.
9. Completion time for correcting deficiencies.
10. Inspections by authorities having jurisdiction.
11. Certificate of Occupancy and transfer of insurance responsibilities.
12. Partial release of retainage.
13. Final cleaning.
14. Preparation for final inspection.
15. Closeout Submittals:
 - a. Project record documents.
 - b. Operating and maintenance documents.
 - c. Operating and maintenance materials.
 - d. Affidavits.
16. Final Application for Payment.
17. Contractor's demobilization of Site.
18. Maintenance.

- E. Record minutes and distribute to participants within two days after meeting, to Architect/Engineer, Owner, and those affected by decisions made.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION

3.1 ALTERATION PROCEDURES

- A. Entire facility will be occupied for normal operations during progress of construction. Cooperate with Owner in scheduling operations to minimize conflict and to permit continuous usage.
1. Perform Work not to interfere with operations of occupied areas.
 2. Keep utility and service outages to a minimum and perform only after written approval of Owner.
 3. Clean Owner-occupied areas daily. Clean spillage, overspray, and heavy collection of dust in Owner-occupied areas immediately.

- B. Materials: As specified in product Sections; match existing products with new products for patching and extending Work.
- C. Employ skilled and experienced installer to perform alteration and renovation Work.
- D. Cut, move, or remove items as necessary for access to alterations and renovation Work. Replace and restore at completion. Comply with Section 017000 - Execution and Closeout Requirements
- E. Remove unsuitable material not marked for salvage, including rotted wood, corroded metals, and deteriorated masonry and concrete. Replace materials as specified for finished Work.
- F. Remove debris and abandoned items from area and from concealed spaces.
- G. Prepare surface and remove surface finishes to permit installation of new Work and finishes.
- H. Close openings in exterior surfaces to protect existing Work from weather and extremes of temperature and humidity.
- I. Remove, cut, and patch Work to minimize damage and to permit restoring products and finishes to original or specified condition.
- J. Where new Work abuts or aligns with existing Work, provide smooth and even transition. Patch Work to match existing adjacent Work in texture and appearance.
- K. When finished surfaces are cut so that smooth transition with new Work is not possible, terminate existing surface along straight line at natural line of division and submit recommendation to Architect/Engineer for review.
- L. Patch or replace portions of existing surfaces that are damaged, lifted, discolored, or showing other imperfections.
- M. Finish surfaces as specified in individual product Sections.

END OF SECTION 013000

SECTION 013216 - CONSTRUCTION PROGRESS SCHEDULE

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Submittals.
- B. Quality assurance.
- C. Bar chart schedules.
- D. Review and evaluation.
- E. Updating schedules.
- F. Distribution.

1.2 DIGITAL PROJECT DATA LICENSING

- A. Engineer's Data Files Not Available: Architect/Engineer will not provide Engineer's CAD drawing digital data files for Contractor's use during construction.

1.3 SUBMITTALS

- A. Immediately after signing the Contract, the Contractor shall prepare a graphic progress schedule, indicating the work to be executed during each month and the rate of expected progress to secure completion on the agreed upon completion date. The progress schedule shall be approved by the Engineer and Owner prior to starting work on the site. Schedule updates and narrative progress reports shall be furnished to the Engineer with each requisition for payment.
- B. Schedule Updates:
 - 1. Overall percent complete, projected and actual.
 - 2. Completion progress by listed activity and sub-activity, to within five days prior to submittal.
 - 3. Changes in Work scope and activities modified since submittal.
 - 4. Delays in submittals or resubmittals, deliveries, or Work.
 - 5. Adjusted or modified sequences of Work.
 - 6. Other identifiable changes.
 - 7. Revised projections of progress and completion.
- C. Narrative Progress Report:
 - 1. Submit with each submission of Progress Schedule.
 - 2. Summary of Work completed during the past period between reports.

3. Work planned during the next period.
4. Explanation of differences between summary of Work completed and Work planned in previously submitted report.
5. Current and anticipated delaying factors and estimated impact on other activities and completion milestones.
6. Corrective action taken or proposed.

1.4 QUALITY ASSURANCE

- A. Scheduler: Contractor's personnel specializing in CPM scheduling with experience in scheduling construction work of complexity comparable to the Project.
- B. Contractor's Administrative Personnel: Experience in using and monitoring CPM schedules on comparable Projects.

1.5 BAR CHART SCHEDULES

- A. Format: Bar chart Schedule, to include at least:
 1. Identification and listing in chronological order of those activities reasonably required to complete the Work, including:
 - a. Subcontract Work.
 - b. Major equipment design, fabrication, factory testing, and delivery dates including required lead times.
 - c. Move-in and other preliminary activities.
 - d. Equipment and equipment system test and startup activities.
 - e. Project closeout and cleanup.
 - f. Work sequences, constraints, and milestones.
 2. Listings identified by Specification Section number.
 3. Identification of the following:
 - a. Horizontal time frame by year, month, and week.
 - b. Duration, early start, and completion for each activity and subactivity.
 - c. Critical activities and Project float.
 - d. Subschedules to further define critical portions of Work.

1.6 REVIEW AND EVALUATION

- A. Participate in joint review and evaluation of schedules with Architect/Engineer at each submittal.
- B. Evaluate Project status to determine Work behind schedule and Work ahead of schedule.
- C. After review, revise schedules incorporating results of review, and resubmit within 10 days.

1.7 UPDATING SCHEDULES

- A. Maintain schedules to record actual start and finish dates of completed activities.

- B. Indicate progress of each activity to date of revision, with projected completion date of each activity. Update schedules to depict current status of Work.
- C. Identify activities modified since previous submittal, major changes in Work, and other identifiable changes.
- D. Upon approval of a Change Order, include the change in the next schedule submittal.
- E. Indicate changes required to maintain Date of Substantial Completion.
- F. Submit sorts as required to support recommended changes.
- G. Prepare narrative report to define problem areas, anticipated delays, and impact on schedule. Report corrective action taken or proposed and its effect.

1.8 DISTRIBUTION

- A. Following joint review, distribute copies of updated schedules to Contractor's Project site file, Subcontractors, suppliers, Architect/Engineer, Owner, and other concerned parties.
- B. Instruct recipients to promptly report, in writing, problems anticipated by projections shown in schedules.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 013216

SECTION 013233 – PHOTOGRAPHIC DOCUMENTATION

PART 1 - GENERAL

1.1 PROGRESS PHOTOGRAPHS

- A. The General Construction Contractor shall have two (2) color photographs made of the project every three (3) weeks it is in progress. The photographs shall be of such views and taken at such times as the Engineer directs.
- B. All photographed work shall be done by a qualified, established, commercial photographer. Two (2) glossy prints of each photograph shall be furnished the Engineer and two (2) to the Owner. Prints shall be approximately 7-1/2 in. X 10 in. in size. Prints shall be inserted in transparent sheet protectors provided with punching for a 3-ring binder. Suitable binders shall be provided by the Contractor.
- C. Each photograph shall have a permanent negative title block in the lower right hand corner or on the back, approximately 2-1/4 in. wide x 1-3/4 in. high, and stating therein in neat lettering:
 - 1. Owner's Name
 - 2. Contract Description
 - 3. Contractor's Name
 - 4. Description of View
 - 5. Photo No., Date_____
 - 6. Consulting Engineer
- D. The arrangement of and the information in the title block, shall be subject to the Engineer's approval. The cost for all photographs shall be paid for by the General Construction Contractor.

END OF SECTION 013233

SECTION 013236 – VIDEO MONITORING AND DOCUMENTATION

PART 1 - GENERAL

1.1 SCOPE

- A. Provide all labor, materials, equipment, and services, and perform all operations necessary to furnish to the Owner a complete color audio-video record on a USB Flash Drive of the surface features within the proposed construction zone of influence. This record shall include, but not be limited to, all audio-video USB Flash Drives, storage cases, video logs, and indexes. The purpose of this coverage shall be to accurately document the pre-construction condition of these surface features.

1.2 QUALIFICATIONS

- A. The color audio-video documentation shall be done by a responsible commercial firm known to be skilled and regularly engaged in the business of pre-construction color audio-video documentation. The firm shall furnish such information as the Owner deems necessary to determine the ability of that firm to perform the work in accordance with the Contract specifications.

1.3 PRODUCTS

- A. The color audio-video recording delivered to the Owner shall be on a high-quality USB Flash Drive.

END OF SECTION 013236

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Definitions.
- B. Submittal procedures.
- C. Construction progress schedules.
- D. Proposed product list.
- E. Product data.
- F. Shop Drawings.
- G. Samples.
- H. Other submittals.
- I. Design data.
- J. Test reports.
- K. Certificates.
- L. Manufacturer's instructions.
- M. Manufacturer's field reports.
- N. Erection Drawings.
- O. Construction photographs.
- P. Contractor review.
- Q. Architect/Engineer review.

1.2 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect/Engineer's responsive action.
- B. Informational Submittals: Written and graphic information and physical Samples that do not require Architect/Engineer's responsive action. Submittals may be rejected for not complying with requirements.

1.3 SUBMITTAL PROCEDURES

- A. Transmit each submittal with Architect/Engineer-accepted form.
- B. Sequentially number transmittal forms. Mark revised submittals with original number and sequential alphabetic suffix.
- C. Identify: Project, Contractor, Subcontractor and supplier, pertinent Drawing and detail number, and Specification Section number appropriate to submittal.
- D. Apply Contractor's stamp, signed or initialed, certifying that review, approval, verification of products required, field dimensions, adjacent construction Work, and coordination of information is according to requirements of the Work and Contract Documents.
- E. Schedule submittals to expedite Project, and deliver to Architect/Engineer through electronic submittals via email as PDF files.
- F. For each submittal for review, allow 21 days excluding delivery time to and from Contractor.
- G. Identify variations in Contract Documents and product or system limitations that may be detrimental to successful performance of completed Work.
- H. Allow space on submittals for Contractor and Architect/Engineer review stamps.
- I. When revised for resubmission, identify changes made since previous submission.
- J. Distribute copies of reviewed submittals as appropriate. Instruct parties to promptly report inability to comply with requirements.
- K. Submittals not requested will not be recognized nor processed.
- L. Incomplete Submittals: Architect/Engineer will not review. Complete submittals for each item are required. Delays resulting from incomplete submittals are not the responsibility of Architect/Engineer.
- M. Requests for substitution will be based on a case-to-case bases. Substitution requests shall be submitted with adequate information that justifies that the substitution is an equal or superior product. Failure to supply adequate information will be cause to reject the substitution requests submittal. Review of resubmitted substitution requests will not be recognized or processed.

1.4 CONSTRUCTION PROGRESS SCHEDULES

- A. Comply with Section 013216 - Construction Progress Schedule

1.5 PROPOSED PRODUCT LIST

- A. Within 15 days after date of Notice to Proceed, submit list of major products proposed for use, with name of manufacturer, trade name, and model number of each product.

- B. For products specified only by reference standards, indicate manufacturer, trade name, model or catalog designation, and reference standards.

1.6 PRODUCT DATA

- A. Product Data: Action Submittal: Submit to Architect/Engineer for review for assessing conformance with information given and design concept expressed in Contract Documents.
- B. Submit electronic submittals via Newforma Info Exchange as PDF electronic files.
- C. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- D. Indicate product utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- E. After review, produce copies and distribute according to "Submittal Procedures" Article and for record documents described in Section 017000 - Execution and Closeout Requirements.

1.7 SHOP DRAWINGS

- A. Shop Drawings: Action Submittal: Submit to Architect/Engineer for assessing conformance with information given and design concept expressed in Contract Documents.
- B. Indicate special utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- C. When required by individual Specification Sections, provide Shop Drawings signed and sealed by a professional Engineer responsible for designing components shown on Shop Drawings.
 - 1. Include signed and sealed calculations to support design.
 - 2. Submit Shop Drawings and calculations in form suitable for submission to and approval by authorities having jurisdiction.
 - 3. Make revisions and provide additional information when required by authorities having jurisdiction.
- D. Submit electronic submittals via Newforma Info Exchange as PDF electronic files.
- E. After review, produce copies and distribute according to "Submittal Procedures" Article and for record documents described in Section 017000 - Execution and Closeout Requirements.

1.8 SAMPLES

- A. Samples: Action Submittal: Submit to Architect/Engineer for assessing conformance with information given and design concept expressed in Contract Documents.
- B. Samples for Selection as Specified in Product Sections:
 - 1. Submit to Architect/Engineer for aesthetic, color, and finish selection.

2. Submit Samples of finishes, textures, and patterns for Architect/Engineer selection.
 - C. Submit Samples to illustrate functional and aesthetic characteristics of products, with integral parts and attachment devices. Coordinate Sample submittals for interfacing work.
 - D. Include identification on each Sample, with full Project information.
 - E. Submit number of Samples specified in individual Specification Sections; Architect/Engineer will retain one Sample.
 - F. Reviewed Samples that may be used in the Work are indicated in individual Specification Sections.
 - G. Samples will not be used for testing purposes unless specifically stated in Specification Section.
 - H. After review, produce copies and distribute according to "Submittal Procedures" Article and for record documents described in Section 017000 - Execution and Closeout Requirements.
- 1.9 OTHER SUBMITTALS
- A. Closeout Submittals: Comply with Section 017000 - Execution and Closeout Requirements.
 - B. Informational Submittal: Submit data for Architect/Engineer's knowledge as Contract administrator or for Owner.
 - C. Submit information for assessing conformance with information given and design concept expressed in Contract Documents.
- 1.10 TEST REPORTS
- A. Informational Submittal: Submit reports for Architect/Engineer's knowledge as Contract administrator or for Owner.
 - B. Submit test reports for information for assessing conformance with information given and design concept expressed in Contract Documents.
- 1.11 CERTIFICATES
- A. Informational Submittal: Submit certification by manufacturer, installation/application Subcontractor, or Contractor to Architect/Engineer, in quantities specified for Product Data.
 - B. Indicate material or product conforms to or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
 - C. Certificates may be recent or previous test results on material or product but must be acceptable to Architect/Engineer.

1.12 MANUFACTURER'S INSTRUCTIONS

- A. Informational Submittal: Submit manufacturer's installation instructions for Architect/Engineer's knowledge as Contract administrator or for Owner.
- B. Submit printed instructions for delivery, storage, assembly, installation, startup, adjusting, and finishing, to Architect/Engineer in quantities specified for Product Data.
- C. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.

1.13 MANUFACTURER'S FIELD REPORTS

- A. Informational Submittal: Submit reports for Architect/Engineer's knowledge as Contract administrator or for Owner.
- B. Submit report 5 days of observation to Architect/Engineer for information.
- C. Submit reports for information for assessing conformance with information given and design concept expressed in Contract Documents.

1.14 ERECTION DRAWINGS

- A. Informational Submittal: Submit Drawings for Architect/Engineer's knowledge as Contract administrator or for Owner.
- B. Submit Drawings for information assessing conformance with information given and design concept expressed in Contract Documents.
- C. Data indicating inappropriate or unacceptable Work may be subject to action by Architect/Engineer or Owner.

1.15 CONSTRUCTION PHOTOGRAPHS

- A. Provide photographs of Site and construction throughout progress of Work produced by an experienced photographer acceptable to Architect/Engineer.
- B. Submit photographs with Application for Payment.
- C. Take photographs as evidence of existing Project conditions as follows:
- D. Identify each print. Identify name of Project, orientation of view, date and time of view, name and address of photographer, and photographer's numbered identification of exposure.
- E. Digital Images: Deliver complete set of digital image electronic files to Owner with Project record documents. Identify electronic media with date photographs were taken. Submit images that have same aspect ratio as sensor, uncropped.

1. Digital Images: Uncompressed TIFF format, produced by digital camera with minimum sensor size of 4.0 megapixels, and image resolution of not less than 1024 by 768 pixels.
2. Date and Time: Include date and time in filename for each image.

1.16 CONTRACTOR REVIEW

- A. Review for compliance with Contract Documents and approve submittals before transmitting to Architect/Engineer Construction Manager.
- B. Contractor: Responsible for:
 1. Determination and verification of materials including manufacturer's catalog numbers.
 2. Determination and verification of field measurements and field construction criteria.
 3. Checking and coordinating information in submittal with requirements of Work and of Contract Documents.
 4. Determination of accuracy and completeness of dimensions and quantities.
 5. Confirmation and coordination of dimensions and field conditions at Site.
 6. Construction means, techniques, sequences, and procedures.
 7. Safety precautions.
 8. Coordination and performance of Work of all trades.
- C. Stamp, sign or initial, and date each submittal to certify compliance with requirements of Contract Documents.
- D. Do not fabricate products or begin Work for which submittals are required until approved submittals have been received from Architect/Engineer.

1.17 ARCHITECT/ENGINEER REVIEW

- A. Do not make "mass submittals" to Architect/Engineer. "Mass submittals" are defined as six or more submittals or items in one day or 20 or more submittals or items in one week. If "mass submittals" are received, Architect/Engineer's review time stated above will be extended as necessary to perform proper review. Architect/Engineer will review "mass submittals" based on priority determined by Architect/Engineer after consultation with Owner and Contractor.
- B. Informational submittals and other similar data are for Architect/Engineer's information, do not require Architect/Engineer's responsive action, and will not be reviewed or returned with comment.
- C. Submittals made by Contractor that are not required by Contract Documents may be returned without action.
- D. Submittal approval does not authorize changes to Contract requirements unless accompanied by Change Order, Field Order, or Construction Change Directive.
- E. Owner may withhold monies due to Contractor to cover additional costs beyond the second submittal review.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 013300

SECTION 013319 - FIELD TEST REPORTING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes, but is not limited to, services performed by an independent testing laboratory. Laboratory services covered under this section are for testing materials used for field constructed elements of the work. Performance testing of manufactured items and shop fabricated materials shall be covered under their respective specification section.
- B. All testing performed under this item shall be for the protection and benefit of the Owner and shall not be construed by the Contractor as a comprehensive quality control program intended to protect the Contractor, his subcontractors, or his suppliers. The testing frequency and types of testing shall be as scheduled herein.
- C. Inspections, tests, and related actions specified in this section and elsewhere in the contract documents are not intended to limit the Contractor's own quality control procedures and testing, which facilitate overall compliance with requirements of the contract documents. Requirements for the Contractor to provide quality control services as required by the Engineer, the Owner, governing authorities, or other authorized entities are not limited by the provisions of this Section.
- D. The Contractor is required to cooperate with the testing laboratories performing required inspections, test, and similar services and the Engineer or his representative.
- E. Materials and installed work may require testing or retesting at any time during progress of work. Retesting of rejected materials or installed work shall be done at Contractor's expense.

1.2 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Supplementary Conditions and Division 1 Specifications sections, apply to work of this section.

1.3 SELECTION AND PAYMENT

- A. The Contractor will employ an independent testing laboratory to perform specified testing. Payment shall be incidental to the related work bid item. The laboratory shall be mutually agreed upon by the Owner, Engineer, and Contractor.

- B. Employment of testing laboratory in no way relieves the Contractor of the obligation to perform work in accordance with requirements of the contract documents.
- C. The testing laboratory and their personnel shall be under the direction of the Engineer's on-site representative, regardless of who employs their services.

1.4 REFERENCES

- A. AASHTO T-19, Standard Method of Test for Unit Weight and Voids in Aggregate.
- B. AASHTO T-37, Standard Method of Test for Sieve Analysis of mineral Filler for Road and Paving Materials.
- C. AASHTO T-230, Standard Method of Test for Determining Degree of Pavement Compaction of Bituminous Aggregate Mixtures.
- D. ASTM C-29, Standard Method of Test for Unit Weight and Voids in Aggregate.
- E. ASTM C-31, Standard Practice for Making and Curing Concrete Test Specimens in the Field.
- F. ASTM C-33, Standard Specification for Concrete Aggregates.
- G. ASTM C-39, Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens.
- H. ASTM C-40, Test Method for Organic Impurities in Fine Aggregates for Concrete.
- I. ASTM C-42, Standard Test Methods for Obtaining and Testing Drilled Cored and Sawed Beams of Concrete.
- J. ASTM C-88, Standard Test Method for Soundness of Aggregate by use of Sodium Sulfate or Magnesium Sulfate.
- K. ASTM C-94, Standard Specification for Ready-Mixed Concrete.
- L. ASTM C-117, Standard Test Method for Materials Finer than 75-um (No. 200) Sieve in Mineral Aggregates by Washing.
- M. ASTM C-136, Standard Method for Sieve Analysis of Fine and Course Aggregate.
- N. ASTM C-142, Test Method for Clay Lumps and Friable Particles in Aggregate.
- O. ASTM C-143, Standard Test Method for Slump of Hydraulic Cement Concrete.
- P. ASTM C-172, Standard Practice for Sampling Freshly Mixed Concrete.

- Q. ASTM C-173, Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method.
- R. ASTM C-231, Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method.
- S. ASTM C-535, Standard Test Method for Resistance to Degradation of Large-Size Course Aggregate by Abrasion and Impact in the Los Angeles Machine.
- T. ASTM C-1064, Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete.
- U. ASTM D-698, Standard Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures Using 5.5-lb. (2.49-kg) Rammer and 12-inc. (305-mm) Drop.
- V. ASTM D-2487, Standard Test Method for Classification of Soils for engineer purposes.
- W. ASTM D-2940, Standard Specification for Graded Aggregate Material for Bases or Subbases for Highways or Airports.
- X. ASTM D-4253, Standard Test Method for Maximum Index Density and Unit Weight of Soils Using a Vibratory Table.
- Y. ASTM D-4254, Standard Test Method for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density.
- Z. ASTM D-4832, Standard Test Method for Preparation and Testing of Controlled Low Strength Material (CLSM) Test Cylinders.
- AA. ODOT Supplement 1021, Method of Test for Determination of the Percent of Fractured Pieces in Gravel.
- AB. ODOT Supplement 1029, Method of Test for Determining the Percentage of Deleterious Materials in Course Aggregate.
- AC. ODOT Supplement 1036, Method of Test for Determination of Percent Air Voids in Compacted Dense Bituminous Paving Mixtures.
- AD. ODOT Supplement 1044, Mix Design Method for Bituminous Aggregate Base.
- AE. Uni-Bell PVC Pipe Association UNI-B-6-98 for Low Pressure Air Testing of Installed Sewer Pipe.
- AF. ASTM – C969 – Standard practice for infiltration and exfiltration acceptance of installed concrete sewer pipe.

1.5 SUBMITTALS

- A. Prior to the start of work, submit testing laboratory name, address, and telephone number, and names of full-time specialist(s) and responsible officer.
- B. Submit copy of the testing laboratory's evaluation report issued by one of the evaluation authorities identified in Article 1.6 of this Section with memorandum of remedies of any deficiencies reported by the inspection.
- C. Submit the chain of custody and other QA/QC procedures for each test to be utilized by the laboratory.
- D. Submit a sample test report for review by the Engineer to demonstrate conformance with Article 3.2 herein.

1.6 QUALITY ASSURANCE

- A. The field personnel utilized to perform all field-testing and preparation shall be certified for those tests being performed.

1.7 RESPONSIBILITIES

- A. Testing Laboratory Responsibilities:
 - 1. Provide qualified personnel at the site. Cooperate with the Engineer and Contractor in performance of services.
 - 2. Perform specified sampling and testing of products in accordance with the specified standards.
 - 3. Ascertain compliance of materials and mixes with requirements of the contract documents.
 - 4. Immediately notify the Engineer and Contractor of observed irregularities or nonconformance of work or products.
 - 5. Perform additional tests required by the Engineer.
 - 6. Testing personnel are to report to the Engineer or his representative upon arrival on site for instructions and requirements. Prior to leaving the site, furnish the Engineer or his representative all test results whether in a formal or informal format.
 - 7. Attend preconstruction meetings and progress meetings.
- B. Contractor Responsibilities:
 - 1. Provide access to materials proposed to be used which require testing.
 - 2. Cooperate with laboratory personnel and provide access to the work and to owners' facilities.
 - 3. Provide incidental labor and facilities:
 - a. To provide access to work to be tested.
 - b. To obtain and handle samples at the site or at the source of products to be tested.
 - c. To facilitate tests.

- d. To provide storage and curing of test samples as required by the testing laboratory.
- 4. Notify the Engineer and laboratory 24 hours prior to expected time for operations requiring testing services for scheduling purposes. Materials will not be permitted to be placed without the proper testing being performed in conformance with this Section.

1.8 LIMITS OF LABORATORY AUTHORITY

- A. The laboratory may not release, revoke, alter, or enlarge the requirements of the contract documents.
- B. The laboratory may not approve or accept any portion of the work.
- C. The laboratory may not assume any duties of the Contractor.
- D. The laboratory has no authority to stop the work.

1.9 SCHEDULE OF TESTS

Testing anticipated on this project shall include, but is not limited to:

- A. Earthwork
 - 5. Soil compaction per ASTM D-698.
 - a. Embankment testing shall be at least one (1) test/5,000 S.F. of each lift;
 - b. Trench backfill testing shall be at least one (1) test/50 L.F. of each lift;
 - c. Subgrade and/or subbase testing shall be at least one (1) test/200 L.F. of pavement or 5,000 S.F. of slabs subject to greater frequency due to soil conditions or Engineer's direction.
 - 6. Backfill compaction per ASTM D-4253 and D-4254, one test per 50 L.F. of each lift.
- B. Concrete
 - 1. Concrete aggregate deleterious substances per ASTM C-40, ASTM C-117, and ASTM C-142, one test per source.
 - 2. Concrete aggregate abrasion per ASTM C-535, one test per source.
 - 3. Sodium sulfate soundness of coarse aggregate per ASTM C-88, one test per source.
 - 4. Sampling Fresh Concrete: ASTM C-172, except modified for slump to comply with ASTM C 94.
 - a. When cylinders and/or beam samples are made, the slumps and air test shall be made using concrete from the same batch.

- b. Slump: ASTM C-143; one test at point of discharge for each day's pour of each type of concrete; additional tests when concrete consistency seems to have changed.
 - c. Air Content: ASTM C-173, volumetric method of lightweight concrete; ASTM C-231 pressure method for normal weight concrete; at least one for each pour of each type of air-entrained concrete, and each time a set of compression test specimens is made.
 - d. Concrete Temperature: ASTM C-1064, test hourly when air temperature is 40° F. (4° C.) and below, and when 80° F. (27° C.) and above; and each time a set of compression test specimens is made.
 - e. Compression Test Specimen: ASTM C-31; one set of 4 standard cylinders for each compressive strength test, unless otherwise directed. Mold and store cylinders for laboratory cured test specimens except when field-cure test specimens are required.
 - f. Compressive Strength Tests: ASTM C-39; one set for each day's pour exceeding 5 cubic yards plus additional sets for each 50 cubic yards over and above the first 25 cubic yards of each concrete class placed in any one day; one specimen tested at 7 days, two specimens tested at 28 days, and one specimen retained in reserve for later testing if required. A strength test shall be the average of the strengths of two cylinders made from the same sample of concrete and tested at 28 days.
 - i. When frequency of testing will provide less than 5 strength tests for a given class of concrete, conduct testing from at least 5 randomly selected batches or from each batch if fewer than 5 are used.
 - ii. Strength level of concrete will be considered satisfactory if averages of sets of three consecutive strength test results equal or exceed specified compressive strength, and no individual strength test result falls below specified compressive strength by more than 500 psi.
 - g. Two (2) tests beams shall be made for each 250 square yards of concrete pavement and/or slabs on grade placed.
 - i. For traffic to be allowed on pavement or slab, the modulus of rupture shall be a minimum of 600 psi for Class C concrete or 400 psi for ODOT Class MS or FS.
 - h. When cylinders and/or beam samples are made, the slumps and air test shall be made using concrete from the same batch.
5. Nondestructive Testing: Penetration resistance, sonoscope, or other nondestructive devices may be permitted but shall not be used as the sole basis for acceptance or rejection.
6. Additional Tests: The testing service will make additional tests of in-place concrete when test results indicate specified concrete strengths and other characteristics have not been attained in the structure, as directed by Engineer. Testing service may conduct tests to determine adequacy of

concrete by cored cylinders complying with ASTM C 42, or by other methods as directed.

- a. Contractor shall pay for such tests conducted, and any other additional testing as may be required, when unacceptable concrete is verified.

PART 2 – PRODUCTS (NOT APPLICABLE)

PART 3 – EXECUTION

3.1 SEQUENCING AND SCHEDULING

- A. The Contractor shall coordinate the sequence of work activities so as to accommodate required testing and shall allow sufficient time for testing of materials by the laboratory so as to cause no delay in the work or the work of any other Contractor. In addition, the Contractor shall coordinate his work so as to avoid the necessity of removing and replacing work to accommodate inspections and tests.

3.2 LABORATORY TEST RESULTS

- A. The testing laboratory shall submit a certified written report of each inspection, test, or similar service concurrently to the Owner, Engineer, and Contractor.
- B. Written reports of each inspection, test, or similar service shall include, but not be limited to, the following:
 1. Name of testing laboratory.
 2. Project name and construction contract reference number.
 3. Dates and locations of samples and tests or inspections.
 4. Date of report.
 5. Names of individuals making the inspection or test.
 6. Designation of the work and test method.
 7. Test results.
 8. Notation of significant ambient conditions at the time of sample taking and testing.

END OF SECTION 013319

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Quality control.
- B. Tolerances.
- C. References.
- D. Labeling.
- E. Mockup requirements.
- F. Testing and inspection services.
- G. Manufacturers' field services.

1.2 QUALITY CONTROL

- A. Monitor quality control over suppliers, manufacturers, products, services, Site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with specified standards as the minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- C. Perform Work using persons qualified to produce required and specified quality.
- D. Products, materials, and equipment may be subject to inspection by Architect/Engineer and Owner at place of manufacture or fabrication. Such inspections shall not relieve Contractor of complying with requirements of Contract Documents.
- E. Supervise performance of Work in such manner and by such means to ensure that Work, whether completed or in progress, will not be subjected to harmful, dangerous, damaging, or otherwise deleterious exposure during construction period.

1.3 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' recommended tolerances and tolerance requirements in reference standards. When such tolerances conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.

- C. Adjust products to appropriate dimensions; position before securing products in place.

1.4 REFERENCES

- A. For products or workmanship specified by association, trade, or other consensus standards, comply with requirements of standard except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard by date of issue current as of date for receiving Bids except where specific date is established by code.
- C. Obtain copies of standards and maintain on Site when required by product Specification Sections.
- D. When requirements of indicated reference standards conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.
- E. Neither contractual relationships, duties, or responsibilities of parties in Contract nor those of Architect/Engineer shall be altered from Contract Documents by mention or inference in reference documents.

1.5 LABELING

- A. Attach label from agency approved by authorities having jurisdiction for products, assemblies, and systems required to be labeled by applicable code.
- B. Label Information: Include manufacturer's or fabricator's identification, approved agency identification, and the following information, as applicable, on each label:
 - 1. Model number.
 - 2. Serial number.
 - 3. Performance characteristics.
- C. Manufacturer's Nameplates, Trademarks, Logos, and Other Identifying Marks on Products: Not allowed on surfaces exposed to view in public areas, interior or exterior.

1.6 MOCK-UP REQUIREMENTS

- A. Tests will be performed under provisions identified in this Section and identified in individual product Specification Sections.
- B. Assemble and erect specified or indicated items with specified or indicated attachment and anchorage devices, flashings, seals, and finishes.
- C. Accepted mockups shall be comparison standard for remaining Work.
- D. Where mockup has been accepted by Architect/Engineer and is specified in product Specification Sections to be removed, remove mockup and clear area when directed to do so by Architect/Engineer.

1.7 TESTING AND INSPECTION SERVICES

- A. Employ and pay for services of an independent testing agency or laboratory acceptable to Owner to perform specified testing.
 - 1. Before starting Work, submit testing laboratory name, address, and telephone number, and names of full-time Professional Engineer and/or specialist and responsible officer.
 - 2. Submit copy of report of laboratory facilities' inspection made by Materials Reference Laboratory of National Bureau of Standards during most recent inspection, with memorandum of remedies of deficiencies reported by inspection.
- B. Independent firm will perform tests, inspections, and other services specified in individual Specification Sections and as required by Architect/Engineer.
 - 1. Laboratory: Authorized to operate in State of Ohio.
 - 2. Laboratory Staff: Maintain full-time Professional Engineer and/or specialist on staff to review services.
 - 3. Testing Equipment: Calibrated at reasonable intervals with devices of an accuracy traceable to National Bureau of Standards or accepted values of natural physical constants.
- C. Testing, inspections, and source quality control may occur on or off Project Site. Perform off-Site testing as required by Architect/Engineer or Owner.
- D. Reports shall be submitted by independent firm to Architect/Engineer, Contractor, and authorities having jurisdiction, indicating observations and results of tests and compliance or noncompliance with Contract Documents.
 - 1. Submit final report indicating correction of Work previously reported as noncompliant.
- E. Cooperate with independent firm; furnish samples of materials, design mix, equipment, tools, storage, safe access, and assistance by incidental labor as requested.
 - 1. Notify Architect/Engineer and independent firm 24 hours before expected time for operations requiring services.
 - 2. Make arrangements with independent firm and pay for additional Samples and tests required for Contractor's use.
- F. Employment of testing agency or laboratory shall not relieve Contractor of obligation to perform Work according to requirements of Contract Documents.
- G. Retesting or re-inspection required because of nonconformance with specified or indicated requirements shall be performed by same independent firm on instructions from Architect/Engineer. Payment for retesting or re-inspection will be charged to Contractor by deducting testing charges from Contract Sum/Price.
- H. Agency Responsibilities:
 - 1. Test Samples of mixes submitted by Contractor.
 - 2. Provide qualified personnel at Site. Cooperate with Architect/Engineer and Contractor in performance of services.

3. Perform indicated sampling and testing of products according to specified standards.
 4. Ascertain compliance of materials and mixes with requirements of Contract Documents.
 5. Promptly notify Architect/Engineer and Contractor of observed irregularities or nonconformance of Work or products.
 6. Perform additional tests required by Architect/Engineer.
 7. Attend preconstruction meetings and progress meetings.
- I. Agency Reports: After each test, promptly submit report to Architect/Engineer, Contractor, and authorities having jurisdiction. When requested by Architect/Engineer, provide interpretation of test results. Include the following:
1. Date issued.
 2. Project title and number.
 3. Name of inspector.
 4. Date and time of sampling or inspection.
 5. Identification of product and Specification Section.
 6. Location in Project.
 7. Type of inspection or test.
 8. Date of test.
 9. Results of tests.
 10. Conformance with Contract Documents.
- J. Limits on Testing Authority:
1. Agency or laboratory may not release, revoke, alter, or enlarge on requirements of Contract Documents.
 2. Agency or laboratory may not approve or accept any portion of the Work.
 3. Agency or laboratory may not assume duties of Contractor.
 4. Agency or laboratory has no authority to stop the Work.

1.8 MANUFACTURER'S FIELD SERVICES

- A. When specified in individual Specification Sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe Site conditions, conditions of surfaces and installation, quality of workmanship, startup of equipment, testing, adjusting, and balancing of equipment, commissioning and as applicable, and to initiate instructions when necessary.
- B. Submit qualifications of observer to Architect/Engineer 30 days in advance of required observations. Observer is subject to approval of Architect/Engineer.
- C. Report observations and Site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturer's written instructions.
- D. Refer to Section 013300 - Submittal Procedures, "Manufacturer's Field Reports" Article.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 014000

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. Temporary Utilities:

1. Temporary electricity.
2. Temporary lighting for construction purposes.
3. Temporary heating.
4. Temporary cooling.
5. Temporary ventilation.
6. Temporary water service.
7. Temporary sanitary facilities.

B. Construction Facilities:

1. Field offices and sheds.
2. Parking.
3. Progress cleaning and waste removal.
4. Project identification.

C. Temporary Controls:

1. Barriers.
2. Security.
3. Water control.
4. Dust control.
5. Erosion and sediment control.
6. Noise control.
7. Pollution control.

D. Removal of utilities, facilities, and controls.

1.2 REFERENCES

A. ASTM International:

1. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
2. ASTM E 90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.
3. ASTM E 119 - Standard Test Methods for Fire Tests of Building Construction and Materials.

1.3 TEMPORARY ELECTRICITY

- A. Owner will pay cost of energy used. Exercise measures to conserve energy. Use Owner's existing power service.
- B. Do not disrupt Owner's use of service.

1.4 TEMPORARY LIGHTING FOR CONSTRUCTION PURPOSES

- A. Provide and maintain incandescent lighting for construction operations to achieve minimum lighting level of 2 watts/sq ft.
- B. Provide and maintain 1 watt/sq ft to exterior staging and storage areas after dark for security purposes.
- C. Provide and maintain 0.25 HID lighting to interior work areas after dark for security purposes.
- D. Provide branch wiring from power source to distribution boxes with lighting conductors, pigtails, lamps, and the like, for specified lighting levels.
- E. Maintain lighting and provide routine repairs.
- F. Permanent building lighting may be used during construction.

1.5 TEMPORARY HEATING

- A. Provide temporary heating devices and heat as needed to maintain specified conditions for construction operations.
- B. Owner will pay cost of temporary heat. Exercise measures to conserve energy.

1.6 TEMPORARY COOLING

- A. Provide temporary cooling devices and cooling as needed to maintain specified conditions for construction operations.
- B. Owner will pay cost of temporary cooling. Exercise measures to conserve energy.

1.7 TEMPORARY VENTILATION

- A. Ventilate enclosed areas to achieve curing of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.

1.8 TEMPORARY WATER SERVICE

- A. Owner will pay cost of temporary water. Exercise measures to conserve energy. Use Owner's existing water system, extended and supplemented with temporary devices as needed to maintain specified conditions for construction operations.
- B. Extend branch piping with outlets located so that water is available by hoses with threaded connections.

1.9 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Existing facility use is not permitted. Provide facilities at time of Project mobilization.

1.10 PARKING

- A. If Site space is not adequate, provide additional off-Site parking.

1.11 PROGRESS CLEANING AND WASTE REMOVAL

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain Site in clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, before enclosing spaces.
- C. Broom and vacuum clean interior areas before starting surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and rubbish from Site periodically and dispose of off-Site. Comply with Section 017419 - Construction Waste Management and Disposal.

1.12 PROJECT IDENTIFICATION

- A. Project Identification Sign:
 - 1. One painted sign of construction, design, and content shown on Drawings, location designated.

1.13 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to allow for Owner's use of Site, and to protect existing facilities and adjacent properties from damage from construction operations.
- B. Protect non-owned vehicular traffic, stored materials, Site, and structures from damage.

1.14 SECURITY

A. Security Program:

1. Protect Work on existing premises and Owner's operations from theft, vandalism, and unauthorized entry.

1.15 WATER CONTROL

- A. Grade Site to drain. Maintain excavations free of water. Provide, operate, and maintain necessary pumping equipment.
- B. Protect Site from puddles or running water.

1.16 DUST CONTROL

- A. Execute Work by methods that minimize raising dust from construction operations.
- B. Provide positive means to prevent airborne dust from dispersing into atmosphere and into Owner-occupied areas.

1.17 EROSION AND SEDIMENT CONTROL

- A. Plan and execute construction by methods to control surface drainage from cuts and fills from borrow and waste disposal areas. Prevent erosion and sedimentation.
- B. Minimize surface area of bare soil exposed at one time.
- C. Provide temporary measures including berms, dikes, drains, and other devices to prevent water flow.
- D. Construct fill and waste areas by selective placement to avoid erosive surface silts and clays.
- E. Periodically inspect earthwork to detect evidence of erosion and sedimentation. Promptly apply corrective measures.
- F. Comply with sediment and erosion control plan indicated on Drawings.

1.18 NOISE CONTROL

- A. Provide methods, means, and facilities to minimize noise produced by construction operations.

1.19 POLLUTION CONTROL

- A. Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances and pollutants produced by construction operations.

- B. Comply with pollution and environmental control requirements of authorities having jurisdiction.

1.20 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities, and materials before Final Application for Payment inspection.
- B. Remove underground installations to minimum depth of 2 feet. Grade Site as indicated on Drawings.
- C. Clean and repair damage caused by installation or use of temporary Work.
- D. Restore existing and permanent facilities used during construction to original condition. Restore permanent facilities used during construction to specified condition.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Products.
- B. Product delivery requirements.
- C. Product storage and handling requirements.
- D. Product options.

1.2 PRODUCTS

- A. At minimum, comply with specified requirements and reference standards.
- B. Specified products define standard of quality, type, function, dimension, appearance, and performance required.
- C. Furnish products of qualified manufacturers that are suitable for intended use. Furnish products of each type by single manufacturer unless specified otherwise. Confirm that manufacturer's production capacity can provide sufficient product, on time, to meet Project requirements.
- D. Do not use materials and equipment removed from existing premises except as specifically permitted by Contract Documents.
- E. Furnish interchangeable components from same manufacturer for components being replaced.

1.3 PRODUCT DELIVERY REQUIREMENTS

- A. Transport and handle products according to manufacturer's instructions.
- B. Promptly inspect shipments to ensure products comply with requirements, quantities are correct, and products are undamaged.
- C. Provide equipment and personnel to handle products; use methods to prevent soiling, disfigurement, or damage.

1.4 PRODUCT STORAGE AND HANDLING REQUIREMENTS

- A. Store and protect products according to manufacturer's instructions.
- B. Store products with seals and labels intact and legible.

- C. Store sensitive products in weathertight, climate-controlled enclosures in an environment suitable to product.
- D. For exterior storage of fabricated products, place products on sloped supports aboveground.
- E. Provide off-Site storage and protection when Site does not permit on-Site storage or protection.
- F. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- G. Store loose granular materials on solid flat surfaces in well-drained area. Prevent mixing with foreign matter.
- H. Provide equipment and personnel to store products; use methods to prevent soiling, disfigurement, or damage.
- I. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

1.5 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Products complying with specified reference standards or description.
- B. Products Specified by Naming One or More Manufacturers: Products of one of manufacturers named and complying with Specifications; no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with Provision for Substitutions: Submit Request for Substitution for any manufacturer not named, according to Section 012500 - Substitution Procedures.

PART 2 - PRODUCTS – Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 016000

SECTION 017000 - EXECUTION AND CLOSEOUT REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Examination.
- B. Preparation.
- C. Field engineering.
- D. Execution.
- E. Cutting and patching.
- F. Protecting installed construction.
- G. Starting of systems.
- H. Demonstration and instruction.
- I. Closeout procedures.
- J. Project record documents.
- K. Manual for materials and finishes.
- L. Manual for equipment and systems.
- M. Spare parts and maintenance products.
- N. Product warranties and product bonds.
- O. Final cleaning.

1.2 EXAMINATION

- A. Verify that existing Site conditions and substrate surfaces are acceptable for subsequent Work. Beginning new Work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new Work being applied or attached.
- C. Examine and verify specific conditions described in individual Specification Sections.
- D. Verify that utility services are available with correct characteristics and in correct locations.

1.3 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance according to manufacturer's instructions.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer-required or -recommended substrate primer, sealer, or conditioner prior to applying new material or substance in contact or bond.

1.4 FIELD ENGINEERING

- A. Employ land surveyor registered in State of Ohio.
- B. Locate and protect survey controls and reference points. Promptly notify Architect/Engineer of discrepancies discovered.
- C. Control datum for survey is indicated on Drawings.
- D. Verify setbacks and easements; confirm Drawing dimensions and elevations.
- E. Provide field engineering services. Establish elevations, lines, and levels using recognized engineering survey practices.
- F. Submit copy of Site drawing and certificate signed by land surveyor certifying elevations and locations of the Work are in conformance with Contract Documents.
- G. Maintain complete and accurate log of control and survey Work as Work progresses.
- H. On completion of foundation walls and major Site improvements, prepare certified survey illustrating dimensions, locations, angles, and elevations of construction and Site Work.
- I. Protect survey control points prior to starting Site Work; preserve permanent reference points during construction.
- J. Promptly report to Architect/Engineer loss or destruction of reference point or relocation required because of changes in grades or other reasons.
- K. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to Architect/Engineer.

1.5 EXECUTION

- A. Comply with manufacturer's installation instructions, performing each step in sequence. Maintain one set of manufacturer's installation instructions at Project Site during installation and until completion of construction.
- B. When manufacturer's installation instructions conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.

- C. Verify that field measurements are as indicated on approved Shop Drawings or as instructed by manufacturer.
- D. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, or disfigurement.
 - 1. Secure Work true to line and level and within specified tolerances, or if not specified, industry-recognized tolerances.
 - 2. Physically separate products in place and provide electrical insulation or protective coatings to prevent galvanic action or corrosion between dissimilar metals.
 - 3. Exposed Joints: Provide uniform joint width and arrange to obtain best visual effect. Refer questionable visual effect choices to Architect/Engineer for final decision.
- E. Allow for expansion of materials and building movement.
- F. Climatic Conditions and Project Status: Install each unit of Work under conditions to ensure best possible results in coordination with entire Project.
 - 1. Isolate each unit of Work from incompatible Work as necessary to prevent deterioration.
 - 2. Coordinate enclosure of Work with required inspections and tests to minimize necessity of uncovering Work for those purposes.
- G. Mounting Heights: Where not indicated, mount individual units of Work at industry-recognized standard mounting heights for particular application indicated.
 - 1. Refer questionable mounting height choices to Architect/Engineer for final decision.
 - 2. Elements Identified as Handicap Accessible: Comply with applicable codes and regulations.
- H. Adjust operating products and equipment to ensure smooth and unhindered operation.
- I. Clean and perform maintenance on installed Work as frequently as necessary through remainder of construction period. Lubricate operable components as recommended by manufacturer.

1.6 CUTTING AND PATCHING

- A. Employ skilled and experienced Installers to perform cutting and patching.
- B. Submit written request in advance of cutting or altering elements affecting the following:
 - 1. Structural integrity of element.
 - 2. Integrity of weather-exposed or moisture-resistant elements.
 - 3. Efficiency, maintenance, or safety of element.
 - 4. Visual qualities of sight-exposed elements.
 - 5. Work of Owner or separate Contractor.
- C. Execute cutting, fitting, and patching, including excavation and fill, to complete Work and to accomplish the following:
 - 1. Fit the several parts together, to integrate with other Work.
 - 2. Uncover Work to install or correct ill-timed Work.

3. Remove and replace defective and nonconforming Work.
 4. Remove samples of installed Work for testing.
 5. Provide openings in elements of Work for penetrations of mechanical and electrical Work.
- D. Execute Work by methods to avoid damage to other Work and to provide proper surfaces to receive patching and finishing.
- E. Cut masonry and concrete materials using masonry saw or core drill.
- F. Restore Work with new products according to requirements of Contract Documents.
- G. Fit Work tight to pipes, sleeves, ducts, conduits, and other penetrations through surfaces.
- H. Maintain integrity of wall, ceiling, or floor construction; completely seal voids.
- I. Refinish surfaces to match adjacent finishes. For continuous surfaces, refinish to nearest intersection; for assembly, refinish entire unit.
- J. Identify the hazardous substances or conditions exposed during the Work to Architect/Engineer for decision or remedy.

1.7 PROTECTING INSTALLED CONSTRUCTION

- A. Protect installed Work and provide special protection where specified in individual Specification Sections.
- B. Provide temporary and removable protection for installed products. Control activity in immediate Work area to prevent damage.
- C. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- D. Use durable sheet materials to protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects.
- E. Prohibit traffic or storage upon waterproofed or roofed surfaces. When traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- F. Prohibit traffic from landscaped areas.

1.8 STARTING OF SYSTEMS

- A. Coordinate schedule for startup of various equipment and systems.
- B. Notify Architect/Engineer and Owner seven days prior to startup of each item.
- C. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.

- D. Verify that tests, meter readings, and electrical characteristics agree with those required by equipment or system manufacturer.
- E. Verify that wiring and support components for equipment are complete and tested.
- F. Execute startup under supervision of manufacturer's representative or Contractors' personnel according to manufacturer's instructions.
- G. When specified in individual Specification Sections, require manufacturer to provide authorized representative who will be present at Site to inspect, check, and approve equipment or system installation prior to startup and will supervise placing equipment or system in operation.
- H. Submit a written report in accordance with Section 013300 - Submittal Procedures stating that equipment or system has been properly installed and is functioning correctly.

1.9 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate operation and maintenance of products to Owner's personnel two weeks prior to date of Substantial Completion.
- B. Demonstrate Project equipment and instruct in classroom environment located at the Project Site and instructed by manufacturer's representative who is knowledgeable about the Project.
- C. Video Recordings: Provide high-quality color video recordings of demonstration and instructional sessions. Engage commercial videographer to record sessions. Include classroom instructions, demonstrations, board diagrams, and other visual aids. Include menu navigation.
- D. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- E. Use operation and maintenance manuals as basis for instruction. Review contents of manual with Owner's personnel in detail to explain all aspects of operation and maintenance.
- F. Demonstrate startup, operation, control, adjustment, troubleshooting, servicing, maintenance, and shutdown of each item of equipment at agreed time, at equipment location.
- G. Prepare and insert additional data in operations and maintenance manuals when need for additional data becomes apparent during instruction.
- H. Allot the required instruction time for each item of equipment and system as specified in individual Specification Sections.

1.10 CLOSEOUT PROCEDURES

- A. Prerequisites to Substantial Completion: Complete following items before requesting Certification of Substantial Completion, either for entire Work or for portions of Work:
 - 1. Submit maintenance manuals, Project record documents, digital images of construction photographs, video recordings, and other similar final record data in compliance with this Section.

2. Complete facility startup, testing, adjusting, balancing of systems and equipment, demonstrations, and instructions to Owner's operating and maintenance personnel as specified in compliance with this Section.
3. Conduct inspection to establish basis for request that Work is substantially complete. Create comprehensive list (initial punch list) indicating items to be completed or corrected, value of incomplete or nonconforming Work, reason for being incomplete, and date of anticipated completion for each item. Include copy of list with request for Certificate of Substantial Completion.
4. Obtain and submit releases enabling Owner's full, unrestricted use of Project and access to services and utilities. Include certificate of occupancy, operating certificates, and similar releases from authorities having jurisdiction and utility companies.
5. Deliver tools, spare parts, extra stocks of material, and similar physical items to Owner.
6. Discontinue or change over and remove temporary facilities and services from Project Site, along with construction tools, mockups, and similar elements.
7. Perform final cleaning according to this Section.

B. Substantial Completion Inspection:

1. When Contractor considers Work to be substantially complete, submit to Architect/Engineer.
 - a. Written certificate that Work, or designated portion, is substantially complete.
 - b. List of items to be completed or corrected (initial punch list).
2. Within seven days after receipt of request for Substantial Completion, Architect/Engineer will make inspection to determine whether Work or designated portion is substantially complete.
3. Should Architect/Engineer determine that Work is not substantially complete:
 - a. Architect/Engineer will promptly notify Contractor in writing, stating reasons for its opinion.
 - b. Contractor shall remedy deficiencies in Work and send second written request for Substantial Completion to Architect/Engineer.
 - c. Architect/Engineer will reinspect Work.
 - d. Redo and Inspection of Deficient Work: Repeated until Work passes Architect/Engineer's inspection.
4. When Architect/Engineer finds that Work is substantially complete, Architect/Engineer will:
 - a. Prepare Certificate of Substantial Completion on EJCDC C-625 - Certificate of Substantial Completion, accompanied by Contractor's list of items to be completed or corrected as verified and amended by Architect/Engineer and Owner (final punch list).
 - b. Submit Certificate to Owner and Contractor for their written acceptance of responsibilities assigned to them in Certificate.
5. After Work is substantially complete, Contractor shall:
 - a. Allow Owner occupancy of Project under provisions stated in Certificate of Substantial Completion.

- b. Complete Work listed for completion or correction within time period stipulated.
 - 6. Owner will occupy all of WWTP site as specified in Section 011000 - Summary.
- C. Prerequisites for Final Completion: Complete following items before requesting final acceptance and final payment.
 - 1. When Contractor considers Work to be complete, submit written certification that:
 - a. Contract Documents have been reviewed.
 - b. Work has been examined for compliance with Contract Documents.
 - c. Work has been completed according to Contract Documents.
 - d. Work is completed and ready for final inspection.
 - 2. Submittals: Submit following:
 - a. Final punch list indicating all items have been completed or corrected.
 - b. Final payment request with final releases and supporting documentation not previously submitted and accepted. Include certificates of insurance for products and completed operations where required.
 - c. Specified warranties, workmanship/maintenance bonds, maintenance agreements, and other similar documents.
 - d. Accounting statement for final changes to Contract Sum.
 - e. Contractor's affidavit of payment of debts and claims.
 - f. Consent of surety to final payment.
 - g. DBE Subcontractor Participation Forms SR-EPA.7-8 (Applicable for WPCLF & WSRLA funded projects only).
 - 3. Perform final cleaning for Contractor-soiled areas according to this Section.
- D. Final Completion Inspection:
 - 1. Within seven days after receipt of request for final inspection, Architect/Engineer will make inspection to determine whether Work or designated portion is complete.
 - 2. Should Architect/Engineer consider Work to be incomplete or defective:
 - a. Architect/Engineer will promptly notify Contractor in writing, listing incomplete or defective Work.
 - b. Contractor shall remedy stated deficiencies and send second written request to Architect/Engineer that Work is complete.
 - c. Architect/Engineer will reinspect Work.
 - d. Redo and Inspection of Deficient Work: Repeated until Work passes Architect/Engineer's inspection.

1.11 PROJECT RECORD DOCUMENTS

- A. Maintain on Site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.

2. Specifications.
 3. Addenda.
 4. Change Orders and other modifications to the Contract.
 5. Reviewed Shop Drawings, product data, and Samples.
 6. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress, not less than weekly.
- E. Specifications: Legibly mark and record, at each product Section, description of actual products installed, including the following:
1. Manufacturer's name and product model and number.
 2. Product substitutions or alternates used.
 3. Changes made by Addenda, bulletin, Change Order, and modifications.
- F. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction as follows:
1. Include Contract modifications such as Addenda, supplementary instructions, change directives, field orders, minor changes in the Work, and change orders.
 2. Include locations of concealed elements of the Work.
 3. Identify depth of buried utility lines and provide dimensions showing distances from permanent facility components that are parallel to utilities.
 4. Dimension ends, corners, and junctions of buried utilities to permanent facility components using triangulation.
 5. Identify and locate existing buried or concealed items encountered during Project.
 6. Measured depths of foundations in relation to finish floor datum.
 7. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
 8. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
 9. Field changes of dimension and detail.
 10. Details not on original Drawings.
- G. Submit marked-up paper copy documents to Architect/Engineer with claim for final Application for Payment.
- H. Submit PDF electronic files of marked-up documents to Architect/Engineer with claim for final Application for Payment.
- 1.12 MANUAL FOR MATERIALS AND FINISHES
- A. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. Architect/Engineer will review draft and return one copy with comments.

- B. For equipment or component parts of equipment put into service during construction and operated by Owner, submit documents within ten days after acceptance.
- C. Submit one copy of completed volumes 15 days prior to final inspection. Completed volumes, with Architect/Engineer comments, will be returned after final inspection. Revise content of document sets as required prior to final submission.
- D. Submit two sets of revised final volumes within 10 days after final inspection.
- E. Submit in PDF composite electronic indexed file of final volumes within 10 days after final inspection.
- F. Building Products, Applied Materials, and Finishes: Include product data, with catalog number, size, composition, and color and texture designations. Include information for re-ordering custom-manufactured products.
- G. Instructions for Care and Maintenance: Include manufacturer's recommendations for cleaning agents and methods, precautions against detrimental agents and methods, and recommended schedule for cleaning and maintenance.
- H. Moisture Protection and Weather Exposed Products: Include product data listing applicable reference standards, chemical composition, and details of installation. Include recommendations for inspections, maintenance, and repair.
- I. Additional Requirements: As specified in individual product Specification Sections.
- J. Include listing in table of contents for design data, with tabbed fly sheet and space for insertion of data.

1.13 MANUAL FOR EQUIPMENT AND SYSTEMS

- A. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. Architect/Engineer will review draft and return one copy with comments.
- B. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit documents within ten days after acceptance.
- C. Submit one copy of completed volumes 15 days prior to final inspection. Completed volumes, with Architect/Engineer comments, will be returned after final inspection. Revise content of document sets as required prior to final submission.
- D. Submit two sets of revised final volumes within ten days after final inspection.
- E. Submit in PDF composite electronic indexed file of final volumes within ten after final inspection.
- F. Equipment and Systems: Include description of unit or system and component parts. Identify function, normal operating characteristics, and limiting conditions. Include performance curves, with engineering data and tests, and complete nomenclature and model number of replaceable parts.

- G. Panelboard Circuit Directories: Provide electrical service characteristics, controls, and communications.
- H. Include color-coded wiring diagrams as installed.
- I. Operating Procedures: Include startup, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shutdown, and emergency instructions. Include summer, winter, and special operating instructions.
- J. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and troubleshooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- K. Include servicing and lubrication schedule and list of lubricants required.
- L. Include manufacturer's printed operation and maintenance instructions.
- M. Include sequence of operation by controls manufacturer.
- N. Include original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- O. Include control diagrams by controls manufacturer as installed.
- P. Include Contractor's coordination drawings indicating installed color-coded piping diagrams.
- Q. Include charts of valve tag numbers, with location and function of each valve, keyed to flow and control diagrams.
- R. Include list of original manufacturer's spare parts, current prices, and recommended quantities to be maintained in storage.
- S. Include test and balancing reports as specified in Section 014000 - Quality Requirements.
- T. Additional Requirements: As specified in individual product Specification Sections.
- U. Include listing in table of contents for design data with tabbed dividers and space for insertion of data.

1.14 SPARE PARTS AND MAINTENANCE PRODUCTS

- A. Furnish spare parts, maintenance, and extra products in quantities specified in individual Specification Sections.
- B. Deliver to Project Site and place in location as directed by Owner; obtain receipt prior to final payment.

1.15 PRODUCT WARRANTIES AND PRODUCT BONDS

- A. Obtain warranties and bonds executed in duplicate by responsible Subcontractors, suppliers, and manufacturers within ten days after completion of applicable item of Work.
- B. Execute and assemble transferable warranty documents and bonds from Subcontractors, suppliers, and manufacturers.
- C. Verify documents are in proper form, contain full information, and are notarized.
- D. Co-execute submittals when required.
- E. Include table of contents and assemble in three D side ring binder.
- F. Submit prior to final Application for Payment.
- G. Time of Submittals:
 - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within ten days after acceptance.
 - 2. Make other submittals within ten days after date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Substantial Completion, submit within ten days after acceptance, listing date of acceptance as beginning of warranty or bond period.

1.16 FINAL CLEANING

- A. Execute final cleaning prior to final Project assessment.
 - 1. Employ experienced personnel or professional cleaning firm.
- B. Clean interior and exterior glass and surfaces exposed to view; remove temporary labels, stains, and foreign substances; polish transparent and glossy surfaces.
- C. Clean equipment and fixtures to sanitary condition with appropriate cleaning materials.
- D. Clean debris from roofs, gutters, downspouts, and drainage systems.
- E. Clean Site; sweep paved areas, rake clean landscaped surfaces.
- F. Remove waste and surplus materials, rubbish, and construction facilities from Site.

PART 2 - PRODUCTS - Not Used

PART 3 - EXECUTION - Not Used

END OF SECTION 017000

SECTION 017800 - FINAL COMPLIANCE AND SUBMITTALS

PART 1 - GENERAL

- 1.1 The following forms and related sign-offs shall be documented in accordance with provisions of the contract. These forms shall be completed by the Contractor and approved by the Owner before final retainer is approved for release. Forms for Items A to E will be attached to the Contractor's executed copy of the contract.
- A. Certificate of Substantial Completion (To be submitted at time of Substantial Completion).
 - B. Contractor's Certification of Completion.
 - C. Contractor's Affidavit of Prevailing Wage.
 - D. Consent of Surety Company for Final Payment.
 - E. Affidavit of Final Acceptance Date and Correction Period.
 - F. Before the OWNER will approve and accept the work and release the retainer, the CONTRACTOR will furnish the OWNER a written report indicating the resolution of any and all property damage claims filed with the CONTRACTOR by any party during the construction period. The information to be supplied shall include, but not be limited to, name of claimant, date filed with CONTRACTOR, name of insurance company and/or adjuster handling claim, how claim was resolved and if claim was not resolved for the full amount, a statement indicating the reason for such action.
 - G. DBE Subcontractor Participation Forms SR-EPA.7-8 (Applicable for WPCLF & WSRLA funded projects only).

END OF SECTION 017800

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Demolition and removal of selected portions of building or structure.
 - 2. Salvage of existing items to be reused or recycled.

- B. Related Requirements:

- 1. Section 011000 "Summary" for restrictions on use of the premises, Owner-occupancy requirements, and phasing requirements.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be salvaged or reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner ready for reuse.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage, prepare for reuse, and reinstall where indicated.
- D. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be salvaged or reinstalled.
- E. Dismantle: To remove by disassembling or detaching an item from a surface, using gentle methods and equipment to prevent damage to the item and surfaces; disposing of items unless indicated to be salvaged or reinstalled.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.

1.5 PREINSTALLATION MEETINGS

- A. Predemolition Conference: Conduct conference at project site.

- 1. Inspect and discuss condition of construction to be selectively demolished.
 - 2. Review structural load limitations of existing structure.

3. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress and avoid delays.
4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
5. Review areas where existing construction is to remain and requires protection.

1.6 INFORMATIONAL SUBMITTALS

- A. Engineering Survey: Submit engineering survey of condition of building.
- B. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property for dust control and noise control. Indicate proposed locations and construction of barriers.
- C. Schedule of Selective Demolition Activities: Indicate the following:
 1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
 2. Interruption of utility services. Indicate how long utility services will be interrupted.
 3. Coordination for shutoff, capping, and continuation of utility services.
 4. Use of stairs.
 5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.
- D. Predemolition Photographs and/or Video: Show existing conditions of adjoining construction, including finish surfaces, that might be misconstrued as damage caused by demolition operations. Comply with Section 013233 "Photographic Documentation" and/or Section 013236 "Video Monitoring & Documentation." Submit before Work begins.
- E. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.7 CLOSEOUT SUBMITTALS

- A. Inventory: Submit a list of items that have been removed and salvaged.

1.8 FIELD CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Notify Engineer/Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

- D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 - 1. If hazardous materials are encountered, do not disturb; immediately notify Engineer/Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. Storage or sale of removed items or materials on-site is not permitted.
- F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
 - 1. Maintain fire-protection facilities in service during selective demolition operations.

1.9 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding.
- B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

1.10 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- B. Standards: Comply with ASSE A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped before starting selective demolition operations.

- B. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- C. Perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.
 - 1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.
- D. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs and/or video.
 - 1. Comply with requirements specified in Section 013233 "Photographic Documentation" and/or Section 013236 "Video Monitoring & Documentation."
 - 2. Inventory and record the condition of items to be removed and salvaged. Provide photographs and/or video of conditions that might be misconstrued as damage caused by salvage operations.
 - 3. Before selective demolition or removal of existing building elements that will be reproduced or duplicated in final Work, make permanent record of measurements, materials, and construction details required to make exact reproduction.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.
- B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.
 - 1. Owner will arrange to shut off indicated services/systems when requested by Contractor.
 - 2. Arrange to shut off utilities with utility companies.
 - 3. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
 - 4. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment.

- d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
- e. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
- f. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
- g. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.

3.3 PROTECTION

- A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 - 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 - 4. Cover and protect equipment that has not been removed.
 - 5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."
- B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 - 1. Strengthen or add new supports when required during progress of selective demolition.
- C. Remove temporary barricades and protections where hazards no longer exist.

3.4 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 - 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.

3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 5. Maintain fire watch during and for at least hours after flame-cutting operations.
 6. Maintain adequate ventilation when using cutting torches.
 7. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 8. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
 9. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- C. Removed and Salvaged Items:
1. Clean salvaged items.
 2. Pack or crate items after cleaning. Identify contents of containers.
 3. Store items in a secure area until delivery to Owner.
 4. Transport items to Owner's storage area designated by Owner.
 5. Protect items from damage during transport and storage.
- D. Removed and Reinstalled Items:
1. Clean and repair items to functional condition adequate for intended reuse.
 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch (19 mm) at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.

- B. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, and then remove concrete between saw cuts.
- C. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and recycle or dispose of them.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
- B. Burning: Do not burn demolished materials.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 030000 - CONCRETE WORK

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.
 - 1. Section 013319 – Field Testing Requirements

1.2 SUMMARY

- A. This Section specifies cast-in place concrete, including form work, reinforcing, mix design, placement procedures and finishes.

1.3 SUBMITTALS

- A. Product Data: Submit data for proprietary materials and items, including reinforcement and forming accessories, admixtures, patching compounds, waterstops, joint systems, curing compounds, dry-shake finish materials, and others as requested by Engineer.
- B. Shop Drawings; Reinforcement: Submit original shop drawings prepared for fabrication, bending, and placement of concrete reinforcement. Comply with ACI Detailing Manual showing bar schedules, stirrup spacing, diagrams of bent bars, arrangement of concrete reinforcement. Include special reinforcement required for openings through concrete structures.
- C. Shop Drawings; Form work: Submit shop drawings prepared by a registered Professional Engineer for fabrication and erection of forms for specific finished concrete surfaces. Show form construction including jointing, special form joint or reveals, location and pattern of form tie placement, and other items which affect exposed concrete visually.
 - 1. Engineer's review is for general architectural applications and features only. Design of form work for structural stability and efficiency is Contractor's responsibility.
- D. Samples: Submit samples of materials as requested by Engineer, including names, sources, and descriptions.
- E. Laboratory Test Reports: Submit laboratory test reports for concrete materials and mix design tests.
 - 1. The proposed mix design submittal(s) shall follow the procedures of Chapter 5, Sections 5.2 to 5.3 of ACI-318.
 - 2. Reference should be made to ACI-211.5R "Guide for Submittal of Concrete Proportions" for the required submittal information. Sample forms for presenting the necessary information can be found in the addendum at the end of this section. Example Form B should follow a completed Example A in the submittal when

laboratory trial batches are used to document a water-cementitious materials ratio curve.

3. Additional data summarizing the past performance records should be an integral part of the submittal if the submittal is based on past performance with the proposed materials and proportions.

- F. Materials Certificates: Provide materials certificates in lieu of materials laboratory test reports when permitted by Engineer. Materials certificates shall be signed by manufacturer and Contractor, certifying that each material item complies with, or exceeds, specified requirements. Provide certification from admixture manufacturers that chloride content complies with specification requirements.

1.4 QUALITY ASSURANCE

- A. Codes and Standards: Comply with provisions of following codes, specifications, and standards, latest revisions, except where more stringent requirements are shown or specified:
 1. ACI 301 "Specifications for Structural Concrete for Buildings."
 2. ACI 350 Code Requirements for Environmental Concrete Structures and Commentary
 3. ACI 318 "Building Code Requirements for Reinforced Concrete."
 4. Concrete Reinforcing Steel Institute (CRSI), "Manual of Standard Practice."
 5. ACI 347 "Guide to Form work for Concrete."
 6. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
- B. Materials and installed work may require testing and retesting at anytime during progress of work. Tests, including retesting of rejected materials for installed work, shall be done at Contractor's expense.
- C. Engage a testing agency acceptable to Engineer to perform initial material evaluation and certification tests for mix designs and to design concrete mixes.
- D. Mockup: N/A
- E. Pre-installation Conference: Conduct conference at project site to comply with requirements of Division 1 Section "Project Meetings" and the following:
 1. At least 35 days prior to submitting design mixes, conduct a meeting to review detailed requirements for preparing concrete design mixes and to determine procedures for satisfactory concrete operations. Review requirements for submittals, status of coordinating work, and availability of materials. Establish preliminary work progress schedule and procedures for materials, inspection, testing and certifications. Require representatives of each entity directly concerned with cast-in-place concrete to attend conference, including, but not limited to, the following:
 - a. Contractor's Superintendent
 - b. Agency responsible for concrete design mixes.
 - c. Agency responsible for field quality control.

- d. Ready-mix concrete producer.
- e. Concrete Subcontractor
- f. Primary admixture manufactures.

1.5 PROJECT CONDITIONS

- A. Protection of Fresh Concrete Against Freezing: Cover completed work with sufficient temporary or permanent cover as required to protect fresh concrete and adjacent subgrade against possibility of freezing; maintain cover for time period as necessary.
- B. Protect adjacent finish materials against spatter during concrete placement.

PART 2 - PRODUCTS

2.1 FORM MATERIALS

- A. Forms for Exposed Finish Concrete: Plywood, metal, metal-framed plywood faced, or other acceptable panel-type materials, to provide continuous, straight, smooth, exposed surfaces. Furnish in largest practicable sizes to minimize number of joints and to conform to joint system shown on drawings.
 - 1. Use plywood complying with U.S. Product Standard PS-1 "B-B (Concrete Form) Plywood," Class I, Exterior Grade or better, mill-oiled and edge-sealed, with each piece bearing legible inspection trademark.
- B. Forms for Unexposed Finish Concrete: Plywood, lumber, metal, or other acceptable material. Provide lumber dressed on at least two (2) edges and one side for tight fit.
- C. Forms for Textured Finish Concrete: N/A
- D. Forms for Cylindrical Columns and Supports: N/A
- E. Form Coatings: Provide commercial formulation form-coating compounds that will not bond with, stain, nor adversely affect concrete surfaces, and will not impair subsequent treatments of concrete surfaces.
- F. Form Ties: Factory-fabricated, adjustable-length, snapoff metal or glass fiber-reinforced plastic form ties, designed to prevent form deflection and to prevent spalling concrete upon removal. Provide units which will leave no metal closer than 1-1/2" to the exposed surface.
 - 1. Provide ties which, when removed, will leave holes not larger than 1" diameter in concrete surface.
 - 2. All form ties shall have a factor of safety of two (2) to determine the recommended safe working load.

2.2 REINFORCING MATERIALS

- A. Carbon-Steel Reinforcing Bars: ASTM A 615, Grade 60, deformed unfinished billet steel bars.
- B. Low-Allow, Weldable Grade Reinforcing Bars: ASTM A706, Grade 60, deformed unfinished billet steel bars.
- C. Welded Wire Fabric: ASTM A1064/A1064M-22 Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete. Flat sheets only, permitted.
- D. Supports for Reinforcement: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire fabric in place. Use wire bar type supports complying with CRSI specifications.
 - 1. For slabs-on-grade, use supports with sand plates or horizontal runners where base material will not support chair legs.
 - 2. For exposed-to-view concrete surfaces, where legs of supports are in contact with forms, provide supports with legs which are plastic protected (CRSI, Class 1) or stainless steel protected (CRSI, Class 2).

2.1 CONCRETE MATERIALS

- A. Portland Cement: ASTM C 150, Type I, II or I/II and ASTM C595M, Type IP, unless otherwise specified. (See Table I, Concrete Requirements).
 - 1. Use one brand/type of cement throughout project, unless otherwise acceptable to Engineer.
- B. Fly Ash: ASTM C 618, Class F.
 - 1. Limit use of fly ash to not exceed 25% of cement content by weight.
- C. Ground Granulated Blast-Furnace Slag: ASTM C989, Grade 100 or 120.
 - 1. Limit use of granulated blast-furnace slag to not exceed 30% of cement content by weight.
- D. Normal Weight Aggregates: ASTM C 33, and as herein specified. Provide aggregates from a single source for exposed concrete, with nominal maximum aggregate size of 1 inch.
 - 1. For exterior exposed surfaces, do not use fine or coarse aggregates containing spalling-causing deleterious substances.
 - 2. Local aggregates not complying with ASTM C 33 but which have shown by special test or actual service to produce concrete of adequate strength and durability may be used when acceptable to Engineer.

3. Combined Aggregate Gradation: Well graded from coarsest to finest with not more than 18 percent and not less than 8 percent retained on an individual sieve, except that less than 8 percent may be retained on coarsest sieve and on No. 50 (0.3-mm) sieve, and less than 8 percent may be retained on sieves finer than No. 50 (0.3 mm).
- E. Lightweight Aggregates: N/A
- F. Water: Drinkable and complying with ASTM C94.
- G. Air-Entraining Admixture: ASTM C 260, certified by manufacturer to be compatible with other required admixtures.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Air-Mix"; Euclid Chemical Co.
 - b. "Sika Air"; Sika Corp.
 - c. "MB-VR or MB-AE"; Master Builders.
- H. Water-Reducing Admixture: ASTM C 494, Type A, and containing not more than 0.1 percent chloride ions.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "WRDA"; W.R. Grace.
 - b. "Eucon WR-75"; Euclid Chemical Co.
 - c. "Pozzolith Normal"; Master Builders.
 - d. "SikaPlast-200"; Sika Corp.
- I. High-Range Water-Reducing Admixture (Super Plasticizer): ASTM C 494, Type F and containing not more than 0.1 percent chloride ions.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Sikament SPMN"; Sika Corp.
 - b. "Eucon 37"; Euclid Chemical Co.
 - c. "Rheobuild or Polyheed"; Master Builders.
- J. Water-Reducing, Non-Chloride Accelerator Admixture: ASTM C 494, Type E, and containing not more than 0.1 percent chloride ions.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Accelguard 80"; Euclid Chemical Co.
 - b. "Pozzutec 20"; Master Builders.
 - c. "Daraset"; W.R. Grace & Co.
 - d. "SikaSet NC"; Sika Corp.
- K. Water-Reducing, Retarding Admixture: ASTM C 494, Type D, and containing not more than 0.1 percent chloride ions.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Pozzolith"; Master Builders.
 - b. "Eucon Retarder 75"; Euclid Chemical Co.
 - c. "Plastiment"; Sika Corp.
- L. Crystalline waterproofing admixture: Provide Xypex C500 admixture as manufactured by Xypex Chemical Corporation, Richmond, British Columbia, Canada, at www.Xypex.com. Dosage rate shall be 2.0%-3.0% by weight of total cementitious material content in the concrete. No substitution of this admixture shall be acceptable. This admixture shall be incorporated in Class D concrete in accordance with manufacturer's recommendations and requirements.
- M. Corrosion-Inhibiting Admixture: Commercially formulated, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete.
 1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
 2. Products: Subject to compliance with requirements, provide one of the following:
 - a. Catexol 1000CL; Axim Concrete Technologies.
 - b. MCI 2000 or MCI 2005; Cortec Corporation.
 - c. DCI or DCI-S; W.R. Grace & Co., Construction Products Div.
 - d. Rheocrete 222+; Master Builders, Inc.
 - e. FerroGard-901; Sika Corporation.
- N. Prohibited Admixtures: Calcium chloride thiocyanates or admixtures containing more than 0.1 percent chloride ions are not permitted.

2.2

A. Fiber Reinforcement:

1. Synthetic fiber reinforcing shall be added to the concrete for the areas so indicated in the drawings. Only fibers designed and manufactured specifically for use in concrete shall be acceptable as secondary reinforcement, complying with ASTM C1116, not less than 3/4 inch long.
2. The fibers may be added at the batch plant. The incorporation of said fibers shall be documented on the delivery ticket from the ready mix producer. Fibers shall be added to the concrete in strict accordance with manufacturer's printed instructions. The minimum dosage rate shall be 1.5 lbs/cubic yard.
3. Nylon fibers containing 100% virgin nylon monofilaments shall be utilized to impart a "non-hairy" surface to the finished concrete.
4. Products: Subject to compliance with requirements, provide the following fibrous reinforcement or approved equal:
 - a. Nycon Fiber; Nycon, Inc.
 - b. Nylo-Mono; Forta Corp.

- c. Fibrasol N; Axim Concrete Technologies

2.3 RELATED MATERIALS

- A. Reglets: N/A
- B. Waterstops: Provide waterstops at construction joints and other joints as indicated and specified in Section 030000.02.
- C. Granular Base: Evenly graded mixture of fine and coarse aggregates to provide, when compacted, a smooth and even surface below slabs on grade.
- D. Vapor Retarder: N/A
- E. Non-Shrink / Non-metallic Grout: ASTM C-1107, factory pre-mixed grout.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Set Grout"; Master Builders.
 - b. "Euco-NS"; Euclid Chemical Co.
 - c. "Five Star Grout"; U.S. Grout Corp.
 - d. "SikaGrout-212"; Sika Corp.
- F. Non-slip Aggregate Finish: N/A
- G. Colored Wear-Resistant Finish: N/A
- H. Absorptive Cover: Burlap cloth made from jute or kenaf, weighing approximately 9 oz. per sq. yd., complying with AASHTO M 182, Class 2.
- I. Moisture-Retaining Cover: One of the following, complying with ASTM C 171.
 - 1. Waterproof paper.
 - 2. Polyethylene film.
 - 3. Polyethylene-coated burlap.
- J. Liquid Membrane-Forming Curing Compound: N/A
- K. Underlayment Compound: N/A
- L. Bonding Compound: Cementitious epoxy bonding agent with corrosion inhibitor
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Sika Armathec-110 EpoCem"; Sika Corp.
- M. Epoxy Adhesive: ASTM C 881, two component material suitable for use on dry or damp surfaces. Provide material "Type," "Grade," and "Class" to suit project requirements.
 - 1. Products: Subject to compliance with requirements, provide one of the following:

- a. "Epoxite Binder 2390"; A.C. Horn, Inc.
- b. "Sikadur 32 Hi-Mod"; Sika Chemical Corp.
- c. "Euco Epoxy 452 or 620"; Euclid Chemical Co.

2.4 PROPORTIONING AND DESIGN OF MIXES

- A. Prepare design mixes for each type and strength of concrete by either laboratory trial batch or field experience methods as specified in ACI 301 and ACI 211. If the trial batch method is used, use an independent testing facility acceptable to Engineer for preparing and reporting proposed mix designs. The testing facility shall not be the same as used for field quality control testing unless otherwise acceptable to Engineer.
 - 1. Limit use of fly ash to not exceed 25 percent of cement content by weight.
- B. Submit written reports to Engineer and Structural Engineer of each proposed mix for each class of concrete at least 15 days prior to start of work. Do not begin concrete production until mixes have been reviewed by Engineer.
- C. Design mixes to provide normal weight concrete with the following properties, as indicated in Table I.:

TABLE 1

CONCRETE REQUIREMENTS

Concrete <u>Class</u>	Cement <u>Type</u>	Min. 28-Day Compressive Strength <u>PSI</u>	*Max. Water- Cement Ratio <u>Ratio</u>	Min. Cement Content <u>Sacks</u>	Slump <u>Min.</u>	Inch <u>Max.</u>	Entrained <u>Air %</u>
A	I, I/II	4000	0.45	6	**	**	6±1
B	I	2000	0.74	4-1/2	2	6	5±1-1/2
C	I	4000	0.50	6.38	1	4	6±2
D	I/II, II, IP	4500	0.40	6	**	**	6±1
M	I/IA/II	4500	0.36	6	4	8	8±2

* Maximum Water - Cementitious Materials Ratio

** See item 2.4-G(6) below

- 1. All reinforced concrete shall be Class A or D as specified herein, except as otherwise indicated or shown on the drawings:
 - a. Class A concrete shall be used for non-WWTP, non-sewerage applications.
 - b. Class D concrete shall be used for all WWTP and sewerage applications and shall include a crystalline waterproofing admixture in accordance with Item 2.1(L) above and Pozzolan in accordance with Item 2.1(B/C) above.
- 2. Concrete used for mud mats, fill and channeling in manholes and chambers shall be Class B unless otherwise noted on the drawings.

3. Class C concrete conforming to ODOT 499 (Class C) shall be used for all concrete pavement, curbing, driveways, and sidewalks, unless noted otherwise on the drawings.
4. Class M concrete shall be Micro-Silica Modified Concrete, refer to Section 030130 - Concrete Rehabilitation and comply with requirements specified therein.
5. Class B concrete may be used for encasing pipelines, fill, and pipe bedding.
6. Class B concrete shall be used as concrete fill in concrete tanks for shaping or sloping bottoms.

- a. The following steps shall be taken for installation of the Class B concrete:

Scrub concrete slabs and/or walls with a stiff wire brush and streams of clean water as a minimum, to remove laitance.

Apply a bonding agent in accordance with the manufacturer's surface preparation and application recommendations.

The Class B concrete shall then be placed and screeded to bring the surface to final grade.

D. Lightweight Concrete: N/A

E. Micro-Silica Modified Concrete: Refer to Section 030130 - Concrete Rehabilitation and comply with requirements specified therein.

F. Adjustment to Concrete Mixes: Mix design adjustments may be requested by Contractor when characteristics of materials, job conditions, weather, test results, or other circumstances warrant; at no additional cost to Owner and as accepted by Engineer. Laboratory test data for revised mix design and strength results must be submitted to and accepted by Engineer before using in work.

G. Admixtures:

1. Use high range water-reducing admixture (super plasticizer) in Classes A, C and D concrete unless noted otherwise.
2. Use crystalline waterproofing admixture in Class D concrete per item 2.1(L) above.
3. Use non-chloride accelerating admixture in concrete slabs placed at ambient temperatures below 50 deg F (10 deg C).
4. Use air-entraining admixture in all concrete, unless otherwise indicated. Add air-entraining admixture at manufacturer's prescribed rate to result in concrete at point of placement having total air content within limits shown in Table I.
5. Use admixtures for water-reducing and set-control in strict compliance with manufacturer's directions.
6. Slump Limits: Proportion and design mixes to result in concrete slump at point of placement as shown in Table I:
 - a. Concrete containing HRWR admixture (super-plasticizer): Not more than 8" after addition of HRWR to site-verified 2"-3" slump concrete.

2.5 CONCRETE MIXING

- A. Job-Site Mixing: Mix materials for concrete in appropriate drum type batch machine mixer. For mixers of one cu. yd., or smaller capacity, continue mixing at least 1-1/2 minutes, but not more than 5 minutes after ingredients are in mixer, before any part of batch is released. For mixers of capacity larger than one cu. yd., increase minimum 1-1/2 minutes of mixing time by 15 seconds for each additional cu. yd., or fraction thereof.
 - 1. Provide batch ticket for each batch discharged and used in work, indicating project identification name and number, date, mix type, mix time, quantity, and amount of water introduced.
- B. Ready-Mix Concrete: Comply with requirements of ASTM C 94, and as herein specified.
 - 1. During hot weather, or under conditions contributing to rapid setting of concrete, a shorter mixing time than specified in ASTM C 94 may be required.
 - a. When air temperature is between 85 deg F (30 deg C) and 90 deg F (32 deg C), reduce mixing and delivery time from 1-1/2 hours to 75 minutes, and when air temperature is above 90 deg F (32 deg C), reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 GENERAL

- A. Coordinate the installation of joint materials and vapor retarders with placement of forms and reinforcing steel.

3.2 FORMS

- A. Design, erect, support, brace, and maintain form work to support vertical and lateral, static, and dynamic loads that might be applied until such loads can be supported by concrete structure. Construct form work so concrete members and structures are of correct size, shape, alignment, elevation, and position. Maintain form work construction tolerances complying with ACI 347.
- B. Design form work to be readily removable without impact, shock, or damage to cast-in-place concrete surfaces and adjacent materials.
- C. Construct forms to sizes, shapes, lines, and dimensions shown, and to obtain accurate alignment, location, grades, level and plumb work in finished structures. Provide for openings, offsets, sinkages, keyways, recesses, moldings, rustications, reglets, chamfers, blocking, screeds, bulkheads, anchorages and inserts, and other features required in work. Use selected materials to obtain required finishes. Solidly butt joints and provide back-up at joints to prevent leakage of cement paste.
- D. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush plates or wrecking plates where stripping may damage cast concrete

surfaces. Provide top forms for inclined surfaces where slope is too steep to place concrete with bottom forms only. Kerf wood inserts for forming keyways, reglets, recesses, and the like, to prevent swelling and for easy removal.

- E. Provide temporary openings where interior area of form work is inaccessible for cleanout, for inspection before concrete placement, and for placement of concrete. Securely brace temporary openings and set tightly to forms to prevent loss of concrete mortar. Locate temporary openings on forms at inconspicuous locations.
- F. Chamfer exposed corners and edges as indicated, using wood, metal, PVC, or rubber chamfer strips fabricated to produce uniform smooth lines and tight edge joints.
- G. Provisions for Other Trades: Provide openings in concrete form work to accommodate work of other trades. Determine size and location of openings, recesses, and chases from trades providing such items. Accurately place and securely support items built into forms.
- H. Cleaning and Tightening: Thoroughly clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, or other debris just before concrete is placed. Retightening forms and bracing after concrete placement if required to eliminate mortar leaks and maintain proper alignment.

3.3 VAPOR RETARDER INSTALLATION: N/A

3.4 PLACING REINFORCEMENT

- A. Comply with Concrete Reinforcing Steel Institute's recommended practice for "Placing Reinforcing Bars," for details and methods of reinforcement placement and supports.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other materials which reduce or destroy bond with concrete.
- C. Accurately position, support, and secure reinforcement against displacement by form work, construction, or concrete placement operations. Locate and support reinforcing by metal chairs, runners, bolsters, spacers, and hangers, as required.
- D. Place reinforcement to obtain at least minimum coverages for concrete protection. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position during concrete placement operations. Set wire ties so ends are directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire fabric in longest lengths as practicable. Lap adjoining pieces at least one full mesh and lace splices with wire. Offset end laps in adjacent widths to prevent continuous laps in either direction.
- F. Epoxy - Coated Reinforcing Steel: N/A

3.5 JOINTS

- A. Construction Joints: Locate and install construction joints as indicated or, if not indicated, locate so as not to impair strength and appearance of the structure, as acceptable to Engineer.
 - 1. Provide keyways at least 1-1/2" deep in construction joints in walls, slabs, and between walls and footings; accepted bulkheads designed for this purpose may be used for slabs.
 - 2. Place construction joints perpendicular to main reinforcement. Continue reinforcement across construction joints, except as otherwise indicated.
- B. Waterstops: Provide waterstops in construction joints as indicated. Install waterstops to form continuous diaphragm in each joint. Make provisions to support and protect exposed waterstops during progress of work. Fabricate field joints in waterstops in accordance with manufacturer's printed instructions.
- C. Isolation Joints in Slabs-on-Ground: Construct isolation joints in slabs-on-ground at points of contact between slabs-on-ground and vertical surfaces, such as column pedestals, foundation walls, grade beams, and elsewhere as indicated.
 - 1. Joint filler and sealant materials are specified in Section 030000.02 of these specifications.
- D. Contraction (Control) Joints in Slabs-on-Ground: Construct contraction joints in slabs-on-ground to form panels of patterns as shown. Use inserts 1/4 of slab depth, unless otherwise indicated.
 - 1. Form contraction joints by inserting premolded plastic strips into fresh concrete until top surface of strip is flush with slab surface.
 - 2. Follow the directions of Insert Manufacturer for finishing the slab and joints.
- E. If joint pattern not shown, provide joints not exceeding 15' in either direction and located to conform to bay spacing wherever possible (at column centerlines, half bays, third-bays).
 - 1. Joint sealant material is specified in Section 030000.02 of these specifications.

3.6 INSTALLATION OF EMBEDDED ITEMS

- A. General: Set and build into work anchorage devices and other embedded items required for other work that is attached to, or supported by, cast-in-place concrete. Use setting drawings, diagrams, instructions, and directions provided by suppliers of items to be attached thereto. Electrical conduit shall not be embedded in concrete.
- B. Install reglets to receive top edge of foundation sheet waterproofing, and to receive thru-wall flashings in outer face of concrete frame at exterior walls, where flashing is shown at lintels, relieving angles, and other conditions.

- C. Edge Forms and Screed Strips for Slabs: Set edge forms or bulkheads and intermediate screed strips for slabs to obtain required elevations and contours in finished slab surface. Provide and secure units to support screed strips using strike-off templates or compacting type screeds.

3.7 PREPARATION OF FORM SURFACES

- A. Clean re-used forms of concrete matrix residue, repair and patch as required to return forms to acceptable surface condition.
- B. Coat contact surfaces of forms with an approved, nonresidual, low-VOC, form-coating compound before placing reinforcement.
- C. Thin form-coating compounds only with thinning agent of type, amount, and under conditions of form-coating compound manufacturer's directions. Do not allow excess form-coating material to accumulate in forms or to come into contact with in-place concrete surfaces against which fresh concrete will be placed. Apply in compliance with manufacturer's instructions.
- D. Coat steel forms with a non-staining, rust-preventative form oil or otherwise protect against rusting. Rust-stained steel form work is not acceptable.

3.8 CONCRETE PLACEMENT

- A. Preplacement Inspection: Before placing concrete, inspect and complete form work installation, reinforcing steel, and items to be embedded or cast-in. Notify other crafts to permit installation of their work; cooperate with other trades in setting such work. Moisten wood forms immediately before placing concrete where form coatings are not used.
 - 1. Apply temporary protective covering to lower 2' of finished walls adjacent to poured floor slabs and similar conditions, and guard against spattering during placement.
- B. General: Comply with ACI 304 "Recommended Practice for Measuring, Mixing, Transporting, and Placing Concrete," and as herein specified.
 - 1. Deposit concrete continuously or in layers of such thickness that no concrete will be placed on concrete which has hardened sufficiently to cause the formation of seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as herein specified. Deposit concrete as nearly as practicable to its final location to avoid segregation.
- C. Placing Concrete in Forms: Deposit concrete in forms in horizontal layers not deeper than 24" and in a manner to avoid inclined construction joints. Where placement consists of several layers, place each layer while preceding layer is still plastic to avoid cold joints.
 - 1. Consolidate placed concrete by mechanical vibrating equipment supplemented by hand-spading, rodding, or tamping. Use equipment and procedures for consolidation of concrete in accordance with ACI 309.

2. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations not farther than visible effectiveness of machine. Place vibrators to rapidly penetrate placed layer and at least 6" into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to set. At each insertion limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing segregation of mix.
- D. Placing Concrete Slabs: Deposit and consolidate concrete slabs in a continuous operation, within limits of construction joints, until the placing of a panel or section is completed.
1. Consolidate concrete during placing operations so that concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 2. Bring slab surfaces to correct level with straightedge and strikeoff. Use bull floats or darbies to smooth surface, free of humps or hollows. Do not disturb slab surfaces prior to beginning finishing operations.
 3. Maintain reinforcing in proper position on chairs during concrete placement operations.
- E. Cold Weather Placing: Protect concrete work from physical damage or reduced strength which could be caused by frost, freezing actions, or low temperatures, in compliance with ACI 306 and as herein specified.
1. When air temperature has fallen to or is expected to fall below 40 deg F (4 deg C), uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 deg F (10 deg C), and not more than 80 deg F (27 deg C) at point of placement.
 - a. The concrete shall be maintained within this temperature range for not less than seven (7) days.
 2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials or against cold reinforcing steel.
 3. Do not use calcium chloride, salt, and other materials containing antifreeze agents or chemical accelerators, unless otherwise accepted in mix designs.
- F. Hot Weather Placing: When hot weather conditions exist that would seriously impair quality and strength of concrete, place concrete in compliance with ACI 305 and as herein specified.
1. Cool ingredients before mixing to maintain concrete temperature at time of placement below 90 deg F (32 deg C). Mixing water may be chilled, or chopped ice may be used to control temperature provided water equivalent of ice is calculated to total amount of mixing water. Use of liquid nitrogen to cool concrete is Contractor's option.
 2. Cover reinforcing steel with water-soaked burlap if it becomes too hot, so that steel temperature will not exceed the ambient air temperature immediately before embedment in concrete.
 3. Fog spray forms, reinforcing steel, and subgrade just before concrete is placed.

4. Use water-reducing retarding admixture when required by high temperatures, low humidity, or other adverse placing conditions, as acceptable to Engineers.

3.9 FINISH OF FORMED SURFACES

- A. Rough Form Finish: For formed concrete surfaces not exposed-to-view in the finish work or by other construction, unless otherwise indicated. This is the concrete surface having texture imparted by form facing material used, with tie holes and defective areas repaired and patched and fins and other projections exceeding 1/4" in height rubbed down or chipped off.
- B. Smooth Form Finish: For formed concrete surfaces exposed-to-view, or that are to be covered with a coating material applied directly to concrete, or a covering material applied directly to concrete, such as waterproofing, dampproofing, veneer plaster, painting, or other similar system. This is an as-cast concrete surface obtained with selected form facing material, arranged orderly and symmetrically with a minimum of seams. Repair and patch defective areas with fins or other projections completely removed and smoothed; provide smooth rubbed finish to smooth form finish. Refer to "Concrete Surface Repairs."
- C. Smooth Rubbed Finish: Provide smooth rubbed finish to scheduled concrete surfaces, which have received smooth form finish treatment.
 1. Scarify or roughen entire surface by grinding or similar effective means.
 2. Combined one part Portland cement to 1-1/2 parts fine sand by volume and a 50:50 mixture of acrylic or styrene butadiene-based bonding admixture and water to form the consistency of thick paint. Blend standard Portland cement and white Portland cement, amounts determined by trial patches, so that final color of dry grout will match adjacent surfaces.
 3. Thoroughly wet concrete surfaces and apply grout to coat surfaces and fill small holes. Remove excess grout by scraping and rubbing with clean burlap. Keep damp by fog spray for at least 36 hours after rubbing.
 4. Repeat the above process if necessary to fill voids or bug holes and obtain a consistent match to adjacent surfaces, subject to acceptance of the Engineer.
- D. Grout Cleaned Finish: Provide grout cleaned finish on scheduled concrete surfaces which have received smooth form finish treatment.
 1. Scarify or roughen entire surface by grinding or similar effective means.
 2. Apply Thoroseal plaster mix coating by Thoro System Products or approved equivalent with an approximate thickness of 1/8-inch to 1/4-inch.
 3. Follow the manufacturer's recommendations and guidelines regarding surface preparation, application methods and curing.
 4. Repeat the above process if necessary to fill voids or bug holes and obtain a consistent match to adjacent surfaces, subject to acceptance of the Engineer.
- E. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces occurring adjacent to formed surfaces, strike-off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces, unless otherwise indicated.

3.10 MONOLITHIC SLAB FINISHES

- A. Scratch Finish: Apply scratch finish to monolithic slab surfaces that are to receive concrete floor topping or mortar setting beds for tile, Portland cement terrazzo, and other bonded applied cementitious finish flooring material, and as otherwise indicated.
 - 1. After placing slabs, plane surface to tolerances for floor flatness F(F) 15 and floor levelness F(L) 13, measured according to ASTM E 1155. Slope surfaces uniformly to drains where required. After leveling, roughen surface before final set, with stiff brushes, brooms, or rakes.
- B. Float Finish: Apply float finish to monolithic slab surfaces to receive trowel finish and other finishes as hereinafter specified, and slab surfaces which are to be covered with membrane or elastic waterproofing, membrane or elastic roofing, or sand-bed terrazzo, and as otherwise indicated.
 - 1. After screeding, consolidating, and leveling concrete slabs, do not work surface until ready for floating. Begin floating when surface water has disappeared or when concrete has stiffened sufficiently to permit operation of power-driven floats, or both, Consolidate surface with power-driven floats, or by hand-floating if area is small or inaccessible to power units. Check and level surface plane to tolerances of F(F) 18 F(L) 15. Cut down high spots and fill low spots. Uniformly slope surfaces to drains. Immediately after leveling, refloat surface to a uniform, smooth, granular texture.
- C. Trowel Finish: Apply trowel finish to monolithic slab surfaces to be exposed-to-view, and slab surfaces to be covered with resilient flooring, carpet, ceramic or quarry tile, paint, or other thin film finish coating system.
 - 1. After floating, begin first trowel finish operation using a power-driven trowel. Begin final troweling when surface produces a ringing sound as trowel is moved over surface. Consolidate concrete surface by final hand-troweling operation, free of trowel marks, uniform in texture and appearance, and with surface leveled to tolerances of F(F), 20 and F(L) 17, measured according to ASTM E1155. Grind smooth surface defects which would telegraph through applied floor covering system.
- D. Trowel and Fine Broom Finish: Where ceramic or quarry tile is to be installed with thin-set mortar, apply trowel finish as specified, then immediately follow with slightly scarifying surface by fine brooming.
- E. Non-Slip Broom Finish: Apply non-slip broom finish to exterior concrete platforms, steps, and ramps, and elsewhere as indicated.
 - 1. Immediately after float finishing, slightly roughen concrete surface by brooming with fiber bristle broom perpendicular to main traffic route. Coordinate required final finish with Engineer before application.
- F. Non-slip Aggregate Finish: Apply non-slip aggregate finish to concrete stair treads, platforms, ramps, sloped walks, and elsewhere as indicated.

1. After completion of float finishing, and before starting trowel finish, uniformly spread 25 lbs. of dampened non-slip aggregate per 100 sq. ft. of surface. Tamp aggregate flush with surface using a steel trowel, but do not force below surface. After broadcasting and tamping, apply trowel finishing as herein specified.
 2. After curing, lightly work surface with a steel wire brush, or an abrasive stone, and water to expose non-slip aggregate.
- G. Colored Wear-Resistant Finish: Provide colored wear-resistant finish to monolithic slab surface indicated.
1. Apply dry shake materials for colored wear-resistant finish at rate of not less than 100 lbs. per 100 sq. ft., unless greater amount is recommended by material manufacturer.
 2. Immediately following first floating operation, uniformly distribute approximately 2/3 of required weight of dry shake material over concrete surface, and embed by means of power floating. Follow floating operation with second shake application, uniformly distributing remainder of dry shake material with overlapping applications, and embed by power floating.
 3. After completion of broadcasting and floating, apply trowel finish as herein specified. Cure slab surface with curing compound recommended by dry shake hardener manufacturer. Apply curing compound immediately after final finishing.

3.11 CONCRETE CURING AND PROTECTION

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Protect concrete from rapid moisture loss before and during finishing operations.
1. The evaporation graph, Figure 1, of ACI 308 - Curing Concrete, shall be used to determine the evaporation rate during concrete placement. If the rate of evaporation equals or exceeds 0.2 lbs/sq.ft./hr., steps shall be taken to prevent excessive evaporation from the surface.
 2. Start initial curing as soon as free water has disappeared from concrete surface after placing and finishing.
 - a. Initial curing may be any of the methods listed herein that maintain a satisfactory moisture content and temperature.
 3. Begin final curing procedures, if they differ from initial curing, immediately following initial curing and before concrete has dried. Continue curing for at least seven (7) days in accordance with ACI 301 procedures. Avoid rapid drying at end of final curing period.
- B. Curing Methods: Perform curing of all structural concrete as herein specified.
1. Provide moisture curing by following methods.
 - a. Keep concrete surface continuously wet by covering with water.
 - b. Continuous water-fog spray.

- c. Cover concrete surface with specified absorptive cover, thoroughly saturating cover with water and keeping continuously wet. Place absorptive cover to provide coverage of concrete surfaces and edges, with 4" lap over adjacent absorptive covers.
- 2. Provide moisture-cover curing as follows:
 - a. Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width with sides and ends lapped at least 3" and sealed by waterproof tape or adhesive. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
- C. Provide curing and sealing compound to pavement, walks, and curbs only, as follows:
 - 1. Apply specified curing and sealing compound to concrete slabs as soon as final finishing operations are complete (within 2 hours) and after surface water sheen has disappeared. Apply uniformly in continuous operation by power-spray or roller in accordance with manufacturer's directions. Recoat areas subjected to heavy rainfall within three (3) hours after initial application. Maintain continuity of coating and repair damage during curing period.
- D. Curing Formed Surfaces: Cure formed concrete surfaces, including undersides of beams, supported slabs, and other similar surfaces by moist curing with forms in place for full curing period or until forms are removed. If forms are removed, continue curing by methods specified above, as applicable.
- E. Curing Unformed Surfaces: Cure unformed surfaces, such as slabs, floor topping, and other flat surfaces by moist curing methods.
 - 1. Final cure concrete surfaces to receive liquid floor hardener or finish flooring by use of moisture-retaining cover, unless otherwise directed.

3.12 SHORES AND SUPPORTS

- A. Comply with ACI 347 for shoring and reshoring in multistory construction, and as herein specified.
- B. Extend shoring from ground to roof for structures four (4) stories or less, unless otherwise permitted.
- C. Extend shoring at least three (3) floors under floor or roof being placed for structures over four (4) stories. Shore floor directly under floor or roof being placed, so that loads from construction above will transfer directly to these shores. Space shoring in stories below this level in such a manner that no floor or member will be excessively loaded or will induce tensile stress in concrete members where no reinforcing steel is provided. Extend shores beyond minimums to ensure proper distribution of loads throughout structure.
- D. Remove shores and reshore in a planned sequence to avoid damage to partially cured concrete. Locate and provide adequate reshoring to safely support work without excessive stress or deflection.

1. Keep reshores in place a minimum of 15 days after placing upper tier, and longer if required, until concrete has attained its required 28-day strength and heavy loads due to construction operations have been removed.

3.13 REMOVAL OF FORMS

- A. Formwork not supporting weight of concrete, such as sides of beams, walls, columns, and similar parts of the work, may be removed after cumulatively curing at not less than 50 deg F (10 deg C) for five (5) days after placing concrete, provided concrete is sufficiently hard to not be damaged by form removal operations, and provided curing and protection operations are maintained.
- B. Formwork supporting weight of concrete, such as beam soffits, joists, slabs, and other structural elements, may not be removed in less than 14 days or until concrete has attained at least 75 percent of design minimum compressive strength at 28 days. Determine potential compressive strength of in-place concrete by testing field-cured specimens representative of concrete location or members. Lab cured cylinders will not be considered.
- C. Form facing material may be removed five (5) days after placement, only if shores and other vertical supports have been arranged to permit removal of form facing material without loosening or disturbing shores and supports.

3.14 RE-USE OF FORMS

- A. Clean and repair surfaces of forms to be re-used in work. Split, frayed, delaminated, or otherwise damaged form facing material will not be acceptable for exposed surfaces. Apply new form coating compound as specified for new form work.
- B. When forms are extended for successive concrete placement, thoroughly clean surfaces, remove fins and laitance, and tighten forms to close joints. Align and secure joint to avoid offsets. Do not use "patched" forms for exposed concrete surfaces, except as acceptable to Engineer.

3.15 MISCELLANEOUS CONCRETE ITEMS

- A. Filling-In: Fill-in holes and openings left in concrete structures for passage of work by other trades, unless otherwise shown or directed, after work of other trades is in place. Mix, place, and cure concrete as herein specified, to blend with in-place construction. Provide other miscellaneous concrete filling shown or required to complete work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations: Provide machine and equipment bases and foundations, as shown on drawings. Set anchor bolts for machines and equipment with

template at correct elevations, complying with certified diagrams or templates of manufacturer furnishing machines and equipment.

1. Grout base plates and foundations as indicated, using specified non-shrink grout. Use non-metallic grout for exposed conditions, unless otherwise indicated.
- D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads and landings and associated items. Cast-in safety inserts and accessories as shown on drawings. Screed, tamp, and finish concrete surfaces as scheduled. Cure concrete as herein specified.
- E. Reinforced Masonry: Provide concrete grout conforming to ASTM C476 for reinforced masonry lintels and bond beams where indicated on drawings and as scheduled. Maintain accurate location of reinforcing steel during concrete placement.

3.16 CONCRETE SURFACE REPAIRS

- A. Patching Defective Areas: Repair and patch defective areas with cement mortar immediately after removal of forms, when acceptable to Engineer.
 1. Saw-cut out honeycomb, rock pockets, voids over 1/4" in any dimension, down to solid concrete but, in no case to a depth of less than 1." Make edges of cuts slightly undercut to the concrete surface. Thoroughly clean, dampen with water, and brush-coat the area to be patched with specified bonding agent. Place patching mortar after bonding compound has dried.
 2. For exposed-to-view surfaces, blend white Portland cement and standard Portland cement so that, when dry, patching mortar will match surrounding color. Provide test areas at inconspicuous location to verify mixture and color match before proceeding with patching. Compact mortar in place and strike-off slightly higher than surrounding surface.
- B. Repair of Formed Surfaces: Remove and replace concrete having defective surfaces if defects cannot be repaired to satisfaction of Engineer. Surface defects, as such, include color and texture irregularities, cracks, spalls, air bubbles, honeycomb, rock pockets; fins and other projections on surface; and stains and other discolorations that cannot be removed by cleaning. Flush out form tie holes, fill with Portland Cement patching mortar, or precast cement cone plugs secured in place with bonding agent. When other materials are used, apply them in accordance with manufacturer's recommendations.
 1. Repair concealed formed surfaces, where possible, that contain defects that affect the durability of concrete. If defects cannot be repaired, remove and replace concrete.
 2. Repair of Unformed Surfaces: Test unformed surfaces, such as monolithic slabs, for smoothness and verify surface plane to tolerances specified for each surface and finish. Correct low and high areas as herein specified. Test unformed surfaces sloped to drain for trueness of slope, in addition to smoothness using a template having required slope.
 3. Repair finished unformed surfaces that contain defects which affect durability of concrete. Surface defects, as such, include crazing, cracks in excess of 0.01" wide or which penetrate to reinforcement or completely through non-reinforced sections

regardless of width, spalling, pop-outs, honeycomb, rock pockets, and other objectionable conditions.

4. Correct high areas in unformed surfaces by grinding, after concrete has cured at least 14 days.
5. Correct low areas in unformed surfaces during or immediately after completion of surface finishing operations by cutting out low areas and replacing with fresh concrete. Finish repaired areas to blend into adjacent concrete. Proprietary patching compounds may be used when acceptable to Engineer.
6. Repair defective areas, except random cracks and single holes not exceeding 1" diameter, by cutting out and replacing with fresh concrete. Remove defective areas to sound concrete with clean, square cuts and expose reinforcing steel with at least 3/4" clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding compound. Mix patching concrete of same materials to provide concrete of same type or class as original concrete. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
7. Repair isolated random cracks and single holes not over 1" in diameter by dry-pack method. Groove top of cracks and cut-out holes to sound concrete and clean of dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding compound. Mix dry-pack, consisting of one part Portland cement to 2-1/2 parts fine aggregate passing a No. 16 mesh sieve, using only enough water as required for handling and placing. Place dry pack after bonding compound has dried. Compact dry-pack mixture in place and finish to match adjacent concrete. Keep patched area continuously moist for not less than 72 hours.
8. Perform structural repairs with prior approval of Engineer or Structural Engineer for method and procedure, using specified epoxy adhesive and mortar.
9. Repair methods not specified above may be used, subject to acceptance of Engineer.
10. Underlayment Application: Leveling of floors for subsequent finishes may be achieved by use of specified underlayment material.

3.17 THROUGH SECTION CONCRETE CRACK REPAIRS

A. Sealing through wall or slab cracks.

1. Seal cracks for a water-tight or structurally bonded repair with epoxy or chemical grouting procedures.
 - a. The Contractor shall make proper repairs with epoxy injection or chemical injection with a moisture reactive hydrophilic polyurethane foam grout, as directed by the Engineer.

3.18 MUD MATS

- #### A.
- Where called for on the plans or as directed by the Engineer, the Contractor shall construct concrete mud mats immediately after cleaning the excavation bottom, to preserve the bearing surface condition. Concrete for mud mats shall be not less than 3 in. thick. Bottom of excavation shall be free of water, mud and loose material prior to mud mat placement. See Section 310000.

1. Mud mat concrete shall be cast against the side walls of all excavations to completely seal the bottom.

ADDENDUM
EXAMPLE FORM A

CONCRETE SUPPLIER: _____

PROJECT: _____ CONTRACTOR: _____

MIXTURE ID: _____ SPECIFIED f_c : _____ PSI

MATERIAL MIXTURE PROPORTIONS lbs-mass/cu.yd. (pcy)

1.0 Cement Type _____ Source: _____

Sp. Gr. _____ pcy _____ cu. ft.

1.1 Other Cementitious Materials: _____ Class: _____ Source: _____

Sp. Gr. _____ pcy _____ cu. ft.

2.0 Aggregate (No. 1) Type: _____ Size: _____ Source: _____

SSD Sp. Gr. _____ pcy _____ cu. ft.

Dry Rodded Unit Wt.: _____ pcf

Alternate (No. 1) Lightweight Aggregate Type: _____ Size: _____ Source: _____

Sp. Gr. Factor _____ over dry pcy _____ cu. ft.

Loose Unit Wt. _____ pcf Estimated Wet _____ pcf

2.1 Aggregate (No. 2) Type: _____ Size: _____ Source: _____

SSD Sp. Gr. _____ pcy _____ cu. ft.

Dry Rodded Unit Wt.: _____ pcf (If Fine Sized - FM _____)

2.2 Aggregate (Nos. 3, 4, n) Type: _____ Size: _____ Source: _____

SSD Sp. Gr. _____ pcy _____ cu. ft.

Dry Rodded Unit Wt.: _____ pcf

3.0 Water: _____ gal. _____ pcy _____ cu. ft.

EXAMPLE FORM A (CONTINUED)

4.0 Admixtures expressed as fluid ounces/cubic yard, and estimated range

Source: _____ Name: _____ Type _____ oz

Source: _____ Name: _____ Type _____ oz

Source: _____ Name: _____ Type _____ oz

Total Admixture Liquid Vol. _____ cu. ft.

(*) Note: Show volume in 4.0 if not included in cubic feet of air or water.

5.0 Other Materials - fibers, color pigment or other additions

Sp. Gr. _____ pcy _____ cu. ft.

Total Mixture Mass and Volume: _____ pcy _____ cu. ft.

Fresh Concrete Properties

Coarse & Fine Aggregate Gradation

Percent Passing

Slump _____ +/- _____ in.	Sieve Size	Aggregate No.				
		1	2	3	4	Combined
Unit Weight _____ pcf	2 in.	_____	_____	_____	_____	_____
Air Content _____ +/- _____ %	1-1/2 in.	_____	_____	_____	_____	_____
	1 in.	_____	_____	_____	_____	_____
	3/4 in.	_____	_____	_____	_____	_____
	1/2 in.	_____	_____	_____	_____	_____
If Trail Batch Data -	3/8 in.	_____	_____	_____	_____	_____
Identify Batch No. _____	No. 4	_____	_____	_____	_____	_____
Batch Date _____	No. 8	_____	_____	_____	_____	_____
Concrete Temp. _____ °F	No. 16	_____	_____	_____	_____	_____
Comp. Strength-Average _____ °F	No. 30	_____	_____	_____	_____	_____

EXAMPLE FORM A (CONTINUED)

7 day avg. _____ psi	No. 50	_____	_____	_____	_____	_____
28 day avg. _____ psi	No. 100	_____	_____	_____	_____	_____
	No. 200	_____	_____	_____	_____	_____

Comments: _____

Signature: _____ Date: _____

Title: _____

Organization: _____

EXAMPLE FORM B

CONCRETE SUPPLIER: _____

MATERIAL TRAIL BATCH NUMBER - proportions per cubic yard

1 2 3 4

1.0 Cement Source: _____

Type _____ lb lb lb lb

1.1 Other Cementitious Material Sources: _____

Type _____ lb lb lb lb

2.0 Aggregate No. 1 Size _____ Source: _____

SSD _____ lb lb lb lb

Alternate No. 1 Lightweight Aggregates Type _____ Source: _____

Sp. Gr. Factor _____

Oven Dry _____ lb lb lb lb

Wet _____ lb lb lb lb

2.1 Aggregate No. 2 Size _____ Source: _____

SSD _____ lb lb lb lb

2.2 Aggregate Nos. 3, 4, n) Size _____ Source: _____

SSD _____ lb lb lb lb

3.0 Water _____ lb lb lb lb

4.0 Admixtures Source: _____

_____ Type _____ oz oz oz oz

_____ Type _____ oz oz oz oz

_____ Type _____ oz oz oz oz

EXAMPLE FORM B (CONTINUED)

5.0 Other Materials

_____ Type _____ lb _____ lb _____ lb _____ lb

Total Mass: _____ lb _____ lb _____ lb _____ lb

Total Mass/cy: _____ pcy _____ pcy _____ pcy _____ pcy

Relative Cubic Yard Volume: _____ cy _____ cy _____ cy _____ cy

Water-Cementitious Material Ratio:

Fresh Concrete Properties

TRAIL BATCH NUMBER

	<u>## -1</u>	<u>## -2</u>	<u>## -3</u>	<u>## -4</u>
Slump-inches	_____	_____	_____	_____
Air-Content %	_____	_____	_____	_____
Unit Wt. pcf	_____	_____	_____	_____
Concrete Temp. °F	_____	_____	_____	_____
Compressive Strength Results (ASTM C192, C39) or Other Specified Test Requirements				
7 days	_____	_____	_____	_____
	_____	_____	_____	_____
	_____	_____	_____	_____
Average (7 day)	_____	_____	_____	_____

EXAMPLE FORM B (CONTINUED)

28 days	_____	_____	_____	_____
	_____	_____	_____	_____
	_____	_____	_____	_____
Average (28 day)	_____	_____	_____	_____
Water-Cementitious Material Ratio:	_____	_____	_____	_____

Signature: _____ Date: _____

Title: _____

Organization: _____

END OF SECTION 030000

SECTION 030000.02 - EXPANSION AND CONSTRUCTION JOINTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to the work of this section.

1.2 DESCRIPTION OF WORK

- A. This work includes furnishing and installing all joints where necessary.
- B. In general, the work may include the following types of joints:
 - 1. Types A, D, E, F, H and J Expansion Joint
 - 2. Types B and L Waterstop Construction Joint
 - 3. Types C and G Isolation Joints
 - 4. Type K Construction Joint
 - 5. Type CJ Control Joint
- C. Refer to the contract drawings and specifications for locations and details of the applicable joints to be used.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. The non-extruding preformed filler for joint Types A, C, D, E, F, J, L, and M shall conform to the requirements of "Standard Specifications for Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction" ASTM D 1752, Type I, Sponge Rubber. Preformed filler shall be "Sponge Rubber" as manufactured by W.R. Meadows Company, Everlastic 1300 Series concrete gray sponge by Williams Products, Inc. or equal.
- B. The preformed filler for joint Type H shall conform to the requirements of ASTM D 1752, Type III, self-expanding cork. Self-expanding cork shall be as manufactured by W.R. Meadows Company, or equal.
- C. Preformed filler strips up to one (1) inch thickness shall be made as a single piece. Strips greater than one (1) inch thickness shall be fabricated by cementing together a minimum number of pieces. All cementing or vulcanizing shall be done at the point of manufacture.
- D. The joint sealer shall be cold applied in accordance with manufacturer's recommendations.
 - 1. Where the joint is not in contact with water, "No-Trak" as manufactured by A.C. Horn, Inc., "Gardox" by W.R. Meadows, Inc., or equal, shall be used.

2. Where the joint is in contact with water, "Sikaflex-IA" as manufactured by Sika Corporation, or equal shall be used.
- E. Extruded polyvinyl chloride (PVC) waterstops for Type "C" joint shall be nine (9) inches in width, not less than three-eighths (3/8) inch in thickness; Type "L" joint shall be four (4) inches wide, not less than three-sixteenths (3/16) inch in thickness; Types "G" and "J" joint shall be six (6) inches in width, not less than three-eighths (3/8) inch in thickness and all waterstops shall be of corrugated construction. Types "C", "G", and "J" shall have a center bulb and corrugated ends. The waterstops shall be made continuous by use of factory made fittings and field jointing by heat welding in accordance with the manufacturer's recommendations. PVC waterstops shall be as manufactured by Vinylex Corporation, Greenstreak Products, or equal. Provide a test report for each lot of waterstops shipped to the job site.
- F. Type "B" joints shall be as detailed on the drawings. The preformed plastic waterstops shall meet or exceed all requirements of Federal Specifications SS-S-210A, "Sealing Compound for Expansion Joints". Such preformed plastic waterstop shall be "Snyko-Flex" waterstop manufactured by Synko-Flex Products, 2100 Travis Street, Houston, Texas, or an approved equivalent.
- G. Elastomeric bearing pad in joint Type "G" shall be 50 durometer Everlastic 1200 Series Neoprene as manufactured by William Products, Inc., or equal.
- H. Type "K" joint shall be constructed as detailed on the drawings.
- I. Type "CJ" premolded insert shall be "Speed-E-Joint" by W.R. Meadows, or equal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Form work shall be designed to hold the preformed filler in alignment within the joint during and after concrete is poured. General description of the joints are as follows:
 1. Type "A", "D", "E" and "F" expansion joints shall consist of non-extruding preformed filler only to separate the adjoining faces of concrete without the use of a waterstop. The top shall be finished by a joint sealer for slabs. Unless otherwise shown, preformed filler shall be three-fourths (3/4) inch thick and shall be of a width equal to the faces of concrete which it is separating. Where required, the preformed filler shall be attached to concrete by the use of an approved adhesive. Apply bond breaker to edge of preformed filler material only, prior to placing joint sealer. The joint sealer shall bond only to the concrete surfaces.
 2. Type "B" waterstop construction joint shall consist of a standard construction joint and waterstop as detailed on the drawings.
 3. Types "C" and "J" joint shall consist of preformed filler material, waterstop and joint sealer as detailed on the drawings.
 4. Type "G" joint shall consist of an elastomeric bearing pad and waterstop as detailed on the drawings.

5. Type "H" joint shall consist of self-expanding cork to separate the adjoining faces of concrete without the use of a waterstop. The top shall be finished by a joint sealer.
 6. Type "CJ" Control joints shall be made by inserting a removable preformed insert to create a joint which is then filled with a joint sealer, if required.
 7. Type "K" joint shall consist of a standard construction joint, a saw cut, and joint sealer as detailed on the drawings.
- B. PVC waterstops shall be wired to the reinforcing steel every 12" to prevent misalignment during concreting.

END OF SECTION 030000.02

SECTION 030130 - CONCRETE REHABILITATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Removal of deteriorated concrete and subsequent replacement and patching.
 - 2. Floor joint repair.
 - 3. Epoxy crack injection.
 - 4. Micro-silica modified (MSM) concrete overlay.
 - 5. Epoxy modified cementitious structural resurfacing compound/pore filling mortar
 - 6. Polyurethane waterproofing membrane/coating.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review methods and procedures related to concrete maintenance including, but not limited to, the following:
 - a. Verify concrete-maintenance specialist's personnel, equipment, and facilities needed to make progress and avoid delays.
 - b. Overlays, materials, material application, sequencing, tolerances, and required clearances.
 - c. Quality-control program.
 - d. Coordination with building occupants.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, chemical composition, physical properties, test data, and mixing, preparation, and application instructions for products and procedures.
- B. MSM Overlay Mix Design: See also item 2.7 (A).
 - A. Laboratory Test Reports: Submit laboratory test reports for concrete materials and mix design tests.

- a. The proposed mix design submittal shall follow the procedures of Chapter 5, Sections 5.2 to 5.3 of ACI-318.
 - b. Reference should be made to ACI-211.5R "Guide for Submittal of Concrete Proportions" for the required submittal information.
 - c. Additional data summarizing the past performance records should be an integral part of the submittal if the submittal is based on past performance with the proposed materials and proportions.
- B. Materials Certificates: Provide materials certificates in lieu of materials laboratory test reports when permitted by Engineer. Materials certificates shall be signed by manufacturer and Contractor, certifying that each material item complies with, or exceeds, specified requirements. Provide certification from admixture manufacturers that chloride content complies with specification requirements.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For concrete-maintenance specialist and manufacturers.
- B. Material Certificates: For each type of portland cement aggregate supplied for mixing or adding to products at Project site.
- C. Product Test Reports: For each manufactured bonding agent, cementitious patching mortar, joint-filler, crack-injection adhesive, waterproofing membrane/coating, epoxy modified cementitious resurfacing compound/mortar and, for tests performed by manufacturer and witnessed by a qualified testing agency.
- D. Field quality-control reports.
- E. Quality-Control Program: Submit before work begins.

1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Each manufactured bonding-agent, packaged patching-mortar, joint-filler, crack-injection-adhesive, waterproofing membrane/coating, epoxy modified cementitious resurfacing mortar and manufacturer shall employ factory-authorized service representatives who are available for consultation and Project-site inspection and on-site assistance.
- B. Concrete-Maintenance Specialist Qualifications: Engage an experienced concrete-maintenance firm that employs installers and supervisors who are trained and approved by manufacturer to apply packaged patching-mortar, crack-injection adhesive, waterproofing membrane/coating, epoxy modified cementitious resurfacing mortar and to perform work of this Section. Firm shall have completed work similar in material, design, and extent to that indicated for this Project with a record of successful in-service performance. Experience in only installing or patching new concrete is insufficient experience for concrete-maintenance work.

1. Field Supervision: Concrete-maintenance specialist firm shall maintain experienced full-time supervisors on Project site during times that concrete-maintenance work is in progress.
- C. MSM Concrete Overlay Mix Design:
- A. Codes and Standards: Comply with provisions of following codes, specifications, and standards, latest revisions, except where more stringent requirements are shown or specified:
 - a. ACI 301 "Specifications for Structural Concrete for Buildings."
 - b. ACI 350 Code Requirements for Environmental Concrete Structures and Commentary
 - c. ACI 318 "Building Code Requirements for Reinforced Concrete."
 - d. Concrete Reinforcing Steel Institute (CRSI), "Manual of Standard Practice."
 - e. ACI 347 "Guide to Form work for Concrete."
 - f. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
 - B. Materials and installed work may require testing and retesting at anytime during progress of work. Tests, including retesting of rejected materials for installed work, shall be done at Contractor's expense.
 - C. Engage a testing agency acceptable to Engineer to perform initial material evaluation and certification tests for mix designs and to design concrete mixes.
 - D. Quality-Control Program: Prepare a written plan for concrete maintenance to systematically demonstrate the ability of personnel to properly perform maintenance work, including each phase or process, protection of surrounding materials during operations, and control of debris and runoff during the Work. Describe in detail materials, methods, equipment, and sequence of operations to be used for each phase of the Work.
 - E. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for materials and execution.
 1. Concrete Removal and Patching: Remove and repair an approximately 100 sq. in. area each of deteriorated concrete deck deteriorated concrete wall.
 2. Floor Joint Repair: Cut out and reinstall joints in two separate areas, each approximately 48 inches long.
 3. Epoxy Crack Injection: Perform epoxy crack injection in two separate areas, each approximately 48 inches long.
 4. Surface Scarification & Concrete Overlay: Apply an approximately 50 sq. ft. area of concrete overlay.
 5. Waterproofing membrane/coating: Apply an approximately 25 sq. ft. area of membrane/coating.
 6. Epoxy modified cementitious resurfacing mortar: Apply an approximately 25 sq. ft. area of resurfacing mortar.

7. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Engineer specifically approves such deviations in writing.
8. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Comply with manufacturer's written instructions for minimum and maximum temperature requirements and other conditions for storage.
- B. Store cementitious materials off the ground, under cover, and in a dry location.
- C. Store aggregates covered and in a dry location; maintain grading and other required characteristics and prevent contamination.

1.8 PROJECT CONDITIONS

- A. Protect adjacent finish materials against spatter during concrete and product placement.

1.9 FIELD CONDITIONS

- A. Environmental Limitations for Epoxies: Do not apply when air and substrate temperatures are outside limits permitted by manufacturer. During hot weather, cool epoxy components before mixing, store mixed products in shade, and cool unused mixed products to retard setting. Do not apply to wet substrates unless approved by manufacturer.
 1. Use only Class A epoxies when substrate temperatures are below or are expected to go below 40 deg F within eight hours.
 2. Use only Class A or B epoxies when substrate temperatures are below or are expected to go below 60 deg F within eight hours.
 3. Use only Class C epoxies when substrate temperatures are above and are expected to stay above 60 deg F for eight hours.
- B. Cold-Weather Requirements for Cementitious Materials: Do not apply unless concrete-surface and air temperatures are above 40 deg F and will remain so for at least 48 hours after completion of Work.
- C. Hot-Weather Requirements for Cementitious Materials: Protect repair work when temperature and humidity conditions produce excessive evaporation of water from patching materials. Provide artificial shade and wind breaks, and use cooled materials as required. Do not apply to substrates with temperatures of 90 deg F and above.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: For repair products, obtain each color, grade, finish, type, and variety of product from single source and from single manufacturer with resources to provide products of consistent quality in appearance and physical properties.

2.2 BONDING AGENTS

- A. Epoxy-Modified, Cementitious Bonding and Anticorrosion Agent: Manufactured product that consists of water-insensitive epoxy adhesive, portland cement, and water-based solution of corrosion-inhibiting chemicals that forms a protective film on steel reinforcement. Use for all exterior and/or wet areas.

- 1. Manufacturers: Subject to compliance with requirements, undefined:

- a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Kaufman Products, Inc.
 - e. MAPEI Corporation.
 - f. Sika Corporation.
 - g. Sto Corp.

- B. Epoxy Bonding Agent: ASTM C 881/C 881M, bonding system Type V and free of VOCs. Use for dry interior areas only.

- 1. Manufacturers: Subject to compliance with requirements, undefined:

- a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Kaufman Products, Inc.
 - e. MAPEI Corporation.
 - f. Sika Corporation.
 - g. Sto Corp.
 - h. US SPEC, Division of US MIX Company.

2.3 PATCHING MORTAR

- A. Patching Mortar Requirements:

- 1. Only use patching mortars that are recommended by manufacturer for each applicable horizontal, vertical, or overhead use orientation.
 - 2. Color and Aggregate Texture: Provide patching mortar and aggregates of colors and sizes necessary to produce patching mortar that matches existing, adjacent, exposed concrete. Blend several aggregates if necessary to achieve suitable matches.

3. Coarse Aggregate for Patching Mortar: ASTM C 33/C 33M, washed aggregate, Size No. 8, Class 5S. Add to patching-mortar mix only as permitted by patching-mortar manufacturer.
- B. Cementitious Patching Mortar: Packaged, dry mix for repair of concrete in dry interior areas only. For exterior and/or wet areas, use polymer-modified, cementitious patching mortar with corrosion inhibitor.
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Kaufman Products, Inc.
 - e. KOSTER American Corporation.
 - f. MAPEI Corporation.
 - g. Sika Corporation.
 - h. W.R. Meadows, Inc.
 2. Compressive Strength: Not less than 5000 psi at 28 days when tested according to ASTM C 109/C 109M.
- C. Polymer-Modified, Cementitious Patching Mortar with Corrosion Inhibitor: Packaged, dry mix for repair of concrete and that contains a non-redispersible latex additive as either a dry powder or a separate liquid that is added during mixing. Use polymer-modified, cementitious patching mortar with corrosion inhibitor for all exterior and/or wet areas.
1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. AWRC Corporation.
 - b. BASF Corp. - Construction Chemicals.
 - c. CGM, Incorporated.
 - d. ChemMasters, Inc.
 - e. Dayton Superior.
 - f. Euclid Chemical Company (The); an RPM company.
 - g. Kaufman Products, Inc.
 - h. MAPEI Corporation.
 - i. Sika Corporation.
 - j. Simpson Strong-Tie Co., Inc.
 - k. Sto Corp.
 - l. US SPEC, Division of US MIX Company.
 - m. W.R. Meadows, Inc.
 2. Compressive Strength: Not less than 5000 psi at 28 days when tested according to ASTM C 109/C 109M.

2.4 PREPLACED CONCRETE MATERIALS

- A. Preplaced Aggregate: Washed aggregate, ASTM C 33/C 33M, Class 5S, with 100 percent passing a 1-1/2-inch sieve, 95 to 100 percent passing a 1-inch sieve, 40 to 80 percent passing a 3/4-inch sieve, zero to 15 percent passing a 1/2-inch sieve, and zero to 2 percent passing a 3/8-inch sieve.
- B. Fine Aggregate for Grout: Fine aggregate according to ASTM C 33/C 33M, but with 100 percent passing a No. 8 sieve, 95 to 100 percent passing a No. 16 sieve, 55 to 80 percent passing a No. 30 sieve, 30 to 55 percent passing a No. 50 sieve, 10 to 30 percent passing a No. 100 sieve, zero to 10 percent passing a No. 200 sieve, and having a fineness modulus of 1.30 to 2.10.
- C. Grout Fluidifier for Grout: ASTM C 937.
- D. Pozzolans for Grout: ASTM C 618.

2.5 JOINT FILLER

- A. Epoxy Joint Filler: Two-component, semirigid, 100 percent solids, epoxy resin with a Type A Shore durometer hardness of at least 80 according to ASTM D 2240.
 - 1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Kaufman Products, Inc.
 - e. MAPEI Corporation.
 - f. Sika Corporation.
- B. Color: As selected by Architect from full range of industry colors.

2.6 EPOXY CRACK-INJECTION MATERIALS

- A. Epoxy Crack-Injection Adhesive: ASTM C 881/C 881M, bonding system Type IV, free of VOCs.
 - 1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Kaufman Products, Inc.
 - e. MAPEI Corporation.
 - f. Sika Corporation.
 - g. Sto Corp.
 - h. US SPEC, Division of US MIX Company.
 - i. W.R. Meadows, Inc.

2. Capping Adhesive: Product manufactured for use with crack-injection adhesive by same manufacturer.
3. Color: Provide epoxy crack-injection adhesive and capping adhesive that blend with existing, adjacent concrete and do not stain concrete surface.

2.7 CONCRETE-OVERLAY MATERIALS

- A. Micro-Silica Modified Concrete: Per ODOT Specifications & Requirements as indicated herein.

MSM Concrete Mix Proportions (Ref: ODOT Item 847.11)

MSM Overlay Concrete Mix ^{a,d,e,g,i}	Portland Cement Type ^h	Min f' _c 28 Day (psi)	Potable Water Content # (gal)	Cement Content #	Micro-Silica ^b Content #	Max w/c	Coarse Agg ^c No. 8 Limestone #	Fine Agg ^c Natural Sand #	Air Content (%)	Slump ^f (in)	
										Min	Max
MSM (Micro-Silica Modified Conc)	I/IA/II	4500	270 (32.42)	700	50	0.36	1370	1355	8±2	4	8

Notes:

- a ASTM C494 Type F HRWR (superplasticizer) shall be used within the mix
- b Provide micro-silica according to ODOT 701.10/ASTM C 1240; Micro-silica admixture in dissolvable bags shall not be used
- c Coarse & Fine aggregate content may be adjusted (ODOT 703.02/ASTM up to 100# each C33)
- d Transit mixer charge shall be limited to ¾ of its rated capacity or 6 CY, whichever is smaller
- e Load shall be placed within 90 minutes of batching
- f If a slump loss occurs after mixing and before placement, the charge may be re-tempered with the HRWR admixture to restore plasticity
- g Materials shall conform with ODOT Item 847.04 specifications/requirements
- h Cement shall conform to ODOT 701.04/ASTM C150; Only one type of cement shall be used within overlay mix
- i Batch Yield = 27.0 ft³ (1.0 CY)

2.8 POLYURETHANE WATERPROOFING MEMBRANE/COATING

- A. Elastomeric Polyurethane Waterproofing Membrane: Two-component, fast-curing, solvent-free, non-slip, crack-bridging, elastomeric polyurethane coating.

1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Sika Corporation.

- B. Asphalt Extended Polyurethane Waterproofing Membrane: Two component liquid applied, polyurethane, horizontal grade, bitumen modified waterproofing membrane.

1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Sika Corporation.

2.9 STRUCTURAL RESURFACING AND PORE-FILLING MORTAR

- A. High-performance, three component, solvent-free, moisture-tolerant, epoxy modified, cementitious, structural resurfacing compound and pore-filling mortar.

- 1. Manufacturers: Subject to compliance with requirements, undefined:
 - a. BASF Corp. - Construction Chemicals.
 - b. Dayton Superior.
 - c. Euclid Chemical Company (The); an RPM company.
 - d. Sika Corporation.

2.10 MISCELLANEOUS MATERIALS

- A. Portland Cement: ASTM C 150/C 150M, Type I, II, or III unless otherwise indicated.
- B. Water: Potable.

2.11 MIXES

- A. General: Mix products, in clean containers, according to manufacturer's written instructions.
 - 1. Do not add water, thinners, or additives unless recommended by manufacturer.
 - 2. When practical, use manufacturer's premeasured packages to ensure that materials are mixed in proper proportions. When premeasured packages are not used, measure ingredients using graduated measuring containers; do not estimate quantities or use shovel or trowel as unit of measure.
 - 3. Do not mix more materials than can be used within time limits recommended by manufacturer. Discard materials that have begun to set.
- B. Mortar Scrub Coat: Mix dry ingredients with enough water to provide consistency of thick cream.
- C. Dry-Pack Mortar: Mix required type(s) of patching-mortar dry ingredients with just enough liquid to form damp cohesive mixture that can be squeezed by hand into a ball but is not plastic.
- D. Concrete: Comply with Section 030000 "Concrete Work."
- E. Grout for Use with Preplaced Aggregate: Proportion according to ASTM C 938. Add grout fluidifier to mixing water followed by portland cement, pozzolan, and fine aggregate.

PART 3 - EXECUTION

3.1 CONCRETE MAINTENANCE

- A. Have concrete-maintenance work performed only by qualified concrete-maintenance specialist.
- B. Comply with manufacturers' written instructions for surface preparation and product application.

3.2 EXAMINATION

- A. Notify Engineer seven days in advance of dates when areas of deteriorated or delaminated concrete and deteriorated reinforcing bars will be located.
- B. Locate areas of deteriorated or delaminated concrete using hammer or chain-drag sounding and mark boundaries. Mark areas for removal by simplifying and squaring off boundaries. At columns and walls make boundaries level and plumb unless otherwise indicated.
- C. Pachometer Testing: Locate at least three reinforcing bars using a pachometer, and drill test holes to determine depth of cover. Calibrate pachometer using depth of cover measurements, and verify depth of cover in removal areas using pachometer.
- D. Perform surveys as the Work progresses to detect hazards resulting from concrete-maintenance work.

3.3 PREPARATION

- A. Ensure that supervisory personnel are on-site and on duty when concrete maintenance work begins and during its progress.
- B. Protect persons, motor vehicles, surrounding surfaces of building being repaired, building site, plants, and surrounding buildings from harm resulting from concrete maintenance work.
 - 1. Comply with each product manufacturer's written instructions for protections and precautions. Protect against adverse effects of products and procedures on people and adjacent materials, components, and vegetation.
 - 2. Use only proven protection methods appropriate to each area and surface being protected.
 - 3. Provide temporary barricades, barriers, and directional signage to exclude public from areas where concrete maintenance work is being performed.
 - 4. Erect temporary protective covers over walkways and at points of pedestrian and vehicular entrance and exit that must remain in service during course of concrete maintenance work.
 - 5. Contain dust and debris generated by concrete maintenance work and prevent it from reaching the public or adjacent surfaces.

6. Use water-mist sprinkling and other wet methods to control dust only with adequate, approved procedures and equipment that ensure that such water will not create a hazard or adversely affect other building areas or materials.
 7. Protect floors and other surfaces along haul routes from damage, wear, and staining.
 8. Provide supplemental sound-control treatment to isolate removal and dismantling work from other areas of the building.
 9. Protect adjacent surfaces and equipment by covering them with heavy polyethylene film and waterproof masking tape or a liquid strippable masking agent. If practical, remove items, store, and reinstall after potentially damaging operations are complete.
 10. Neutralize and collect alkaline and acid wastes for disposal off Owner's property.
 11. Dispose of debris and runoff from operations by legal means and in a manner that prevents soil erosion, undermining of paving and foundations, damage to landscaping, and water penetration into building interiors.
- C. Existing Drains: Prior to the start of work in an area, test drainage system to ensure that it is functioning properly. Notify Engineer immediately of inadequate drainage or blockage. Do not begin work in an area until the drainage system is in working order.
1. Prevent solids such as aggregate or mortar residue from entering the drainage system. Clean out drains and drain lines that become sluggish or blocked by sand or other materials resulting from concrete maintenance work.
 2. Protect drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.
- D. Preparation for Concrete Removal: Examine construction to be repaired to determine best methods to safely and effectively perform concrete maintenance work. Examine adjacent work to determine what protective measures will be necessary. Make explorations, probes, and inquiries as necessary to determine condition of construction to be removed in the course of repair.
1. Verify that affected utilities have been disconnected and capped.
 2. Inventory and record the condition of items to be removed for reinstallation or salvage.
 3. Provide and maintain shoring, bracing, and temporary structural supports as required to preserve stability and prevent unexpected or uncontrolled movement, settlement, or collapse of construction being demolished and construction and finishes to remain. Strengthen or add new supports when required during progress of removal work.
- E. Reinforcing-Bar Preparation: Remove loose and flaking rust from exposed reinforcing bars by high-pressure water cleaning abrasive blast cleaning needle scaling or wire brushing until only tightly adhered light rust remains.
1. Where section loss of reinforcing bar is more than 25 percent, or 20 percent in two or more adjacent bars, cut bars and remove and replace as indicated on Drawings.
 2. Remove additional concrete as necessary to provide at least 3/4-inch clearance at existing and replacement bars.

3. Splice replacement bars to existing bars according to ACI 318 by lapping, welding, or using mechanical couplings.
- F. Preparation of Floor Joints for Repair: Saw-cut joints full width to edges and depth of spalls, but not less than 3/4 inch deep. Clean out debris and loose concrete; vacuum or blow clear with compressed air.
- G. Surface Preparation for Overlays:
1. Remove delaminated material and deteriorated concrete surface material.
 2. Roughen surface of concrete to produce a surface profile matching CSP 5 or CSP 6 according to ICRI 310.2, and in accordance with the manufacturer's recommendations.
 3. Use sand blasting, shot blasting, scarifying, high-pressure water jetting or milling.
 4. Sweep and vacuum roughened surface to remove debris followed by low-pressure water cleaning.
- H. Acidic Surface Preparation for Sealers: Acid etch surface of concrete to produce a surface profile matching CSP 1 according to ICRI 310.2. Prepare surface for acid etching by detergent scrubbing to remove oils and films that may prevent acid penetration.
1. Remove excess acid solution, reaction products, and debris by squeegeeing or vacuuming.
 2. Scrub surface with an alkaline detergent, rinse, and squeegee or vacuum.
 3. Check acidity of surface with pH test paper and continue rinsing until pH is acceptable according to sealer manufacturer's written instructions.
 4. When pH is acceptable according to sealer manufacturer's written instructions and surface is clean, vacuum dry.

3.4 CONCRETE REMOVAL

- A. Do not overload structural elements with debris, construction/demolition equipment and materials, etc.
- B. Saw-cut perimeter of areas indicated for removal to a depth of at least 1/2 inch. Make cuts perpendicular to concrete surfaces and no deeper than cover on reinforcement.
- C. Remove deteriorated and delaminated concrete by breaking up and dislodging from reinforcement.
- D. Remove additional concrete if necessary to provide a depth of removal of at least 1 inch over entire removal area.
- E. Where half or more of the perimeter of reinforcing bar is exposed, bond between reinforcing bar and surrounding concrete is broken, or reinforcing bar is corroded, remove concrete from entire perimeter of bar and to provide at least 3/4-inch clearance around bar.

- F. Test areas where concrete has been removed by tapping with hammer, and remove additional concrete until unsound and disbonded concrete is completely removed.
- G. Provide surfaces with a fractured profile of at least 1/8 inch that are approximately perpendicular or parallel to original concrete surfaces. At columns and walls, make top and bottom surfaces level unless otherwise directed.
- H. Thoroughly clean removal areas of loose concrete, dust, and debris.

3.5 BONDING AGENT APPLICATION

- A. Epoxy-Modified, Cementitious Bonding and Anticorrosion Agent: Apply to reinforcing bars and concrete by stiff brush or hopper spray according to manufacturer's written instructions. Apply to reinforcing bars in two coats, allowing first coat to dry two to three hours before applying second coat. Allow to dry before placing patching mortar or concrete. Use for all exterior and/or wet areas.
- B. Epoxy Bonding Agent: Apply to reinforcing bars and concrete by brush, roller, or spray according to manufacturer's written instructions, leaving no pinholes or other uncoated areas. Apply to reinforcing bars in at least two coats, allowing first coat to dry before applying second coat. Place patching mortar or concrete while epoxy is still tacky. If epoxy dries, recoat before placing patching mortar or concrete. Use for dry interior areas only.

3.6 PATCHING MORTAR APPLICATION

- A. Place patching mortar as specified in this article unless otherwise recommended in writing by manufacturer or where dry-pack mortar is indicated.
 - 1. Provide forms where necessary to confine patch to required shape.
 - 2. Wet substrate and forms thoroughly and then remove standing water.
- B. Pretreatment: Apply specified bonding agent.
- C. General Placement: Place patching mortar by troweling toward edges of patch to force intimate contact with edge surfaces. For large patches, fill edges first and then work toward center, always troweling toward edges of patch. At fully exposed reinforcing bars, force patching mortar to fill space behind bars by compacting with trowel from sides of bars.
- D. Vertical Patching: Place material in lifts of not more than 2 inches or less than 1/8 inch. Do not feather edge.
- E. Overhead Patching: Place material in lifts of not more than 1-1/2 inches or less than 1/8 inch. Do not feather edge.
- F. Consolidation: After each lift is placed, consolidate material and screed surface.

- G. Multiple Lifts: Where multiple lifts are used, score surface of lifts to provide a rough surface for placing subsequent lifts. Allow each lift to reach final set before placing subsequent lifts.
- H. Finishing: Allow surfaces of lifts that are to remain exposed to become firm and then finish to a surface matching adjacent concrete.
- I. Curing: Wet-cure cementitious patching materials, including polymer-modified cementitious patching materials, for not less than seven days by water-fog spray or water-saturated absorptive cover.

3.7 DRY-PACK-MORTAR APPLICATION

- A. Use dry-pack mortar for deep cavities and where indicated. Place as specified in this article unless otherwise recommended in writing by manufacturer.
 - 1. Provide forms where necessary to confine patch to required shape.
 - 2. Wet substrate and forms thoroughly and then remove standing water.
- B. Pretreatment: Apply specified bonding agent.
- C. Place dry-pack mortar into cavity by hand, and compact tightly into place. Do not place more material at a time than can be properly compacted. Continue placing and compacting until patch is approximately level with surrounding surface.
- D. After cavity is filled and patch is compacted, trowel surface to match profile and finish of surrounding concrete. A thin coat of patching mortar may be troweled into the surface of patch to help obtain required finish.
- E. Wet-cure patch for not less than seven days by water-fog spray or water-saturated absorptive cover.

3.8 CONCRETE PLACEMENT

- A. Place concrete according to Section 033000 "Cast-in-Place Concrete" and as specified in this article.
- B. Pretreatment: Apply epoxy-modified, cementitious bonding and anticorrosion agent, or epoxy bonding agent to reinforcement and concrete substrate.
- C. Standard Placement: Place concrete by form-and-pump method unless otherwise indicated.
 - 1. Use vibrators to consolidate concrete as it is placed.
 - 2. At unformed surfaces, screed concrete to produce a surface that when finished with patching mortar will match required profile and surrounding concrete.
- D. Form-and-Pump Placement: Place concrete by form-and-pump method where indicated.

1. Design and construct forms to resist pumping pressure in addition to weight of wet concrete. Seal joints and seams in forms and where forms abut existing concrete.
 2. Pump concrete into place from bottom to top, releasing air from forms as concrete is introduced. When formed space is full, close air vents and pressurize to 14 psi.
- E. Wet-cure concrete for not less than seven days by leaving forms in place or keeping surfaces continuously wet by water-fog spray or water-saturated absorptive cover.
- F. Fill placement cavities with dry-pack mortar and repair voids with patching mortar. Finish to match surrounding concrete.

3.9 GROUTING PREPLACED AGGREGATE CONCRETE

- A. Use grouted preplaced aggregate concrete for column and wall repairs. Place as specified in this article.
- B. Design and construct forms to resist pumping pressure in addition to weight of wet grout. Seal joints and seams in forms and where forms abut existing concrete.
- C. Apply epoxy-modified cementitious bonding and anticorrosion agent, or epoxy bonding agent to reinforcement and concrete substrate.
- D. Place aggregate in forms, consolidating aggregate in lifts as it is placed. Pack aggregate into upper areas of forms to achieve intimate contact with concrete surfaces.
- E. Fill forms with water to thoroughly dampen aggregate and substrates. Drain water from forms before placing grout.
- F. Pump grout into place at bottom of preplaced aggregate, forcing grout upward. Release air from forms at top as grout is introduced. When formed space is full and grout flows from air vents, close vents and pressurize to 14 psi.
- G. Wet-cure concrete for not less than seven days by leaving forms in place or keeping surfaces continuously wet by water-fog spray or water-saturated absorptive cover.
- H. Repair voids with patching mortar and finish to match surrounding concrete.

3.10 FLOOR-JOINT REPAIR

- A. Cut out deteriorated concrete and reconstruct sides of joint with patching mortar as indicated on Drawings. Install joint filler in nonmoving floor joints where indicated and as specified in this article.
- B. Depth: Install joint filler to a depth of at least 1 inch. Use fine silica sand no more than 1/4 inch deep to close base of joint. Do not use sealant backer rods or compressible fillers below joint filler.
- C. Top Surface: Install joint filler so that when cured, it is flush at top surface of adjacent concrete. If necessary, overfill joint and remove excess when filler has cured.

3.11 EPOXY CRACK INJECTION

- A. Clean cracks with oil-free compressed air or low-pressure water to remove loose particles.
- B. Clean areas to receive capping adhesive of oil, dirt, and other substances that would interfere with bond.
- C. Place injection ports as recommended by epoxy manufacturer, spacing no farther apart than thickness of member being injected. Seal injection ports in place with capping adhesive.
- D. Seal cracks at exposed surfaces with a ribbon of capping adhesive at least 1/4 inch thick by 1 inch wider than crack.
- E. Inject cracks wider than 0.003 inch to a depth of 8 inches.
- F. Inject epoxy adhesive, beginning at widest part of crack and working toward narrower parts. Inject adhesive into ports to refusal, capping adjacent ports when they extrude epoxy. Cap injected ports and inject through adjacent ports until crack is filled.
- G. After epoxy adhesive has set, remove injection ports and grind surfaces smooth.

3.12 MSM OVERLAY APPLICATION

- A. Comply with design drawings and associated structural notes.

3.13 EPOXY MODIFIED CEMENTITIOUS STRUCTURAL RESURFACING

- A. Comply with design drawings and associated structural notes.

3.14 POLYURETHANE WATERPROOFING MEMBRANE APPLICATION

- A. Comply with design drawings and associated structural notes.

3.15 FIELD QUALITY CONTROL

- A. Testing: Contractor shall engage a qualified testing agency to perform materials and procedures testing.
- B. Regular Inspections: Construction site manager shall perform regular inspections to ensure that all work is carried out according to the plans/specifications.
- C. Special Inspection: Owner shall engage a special inspector to inspect those elements as defined/stipulated within OBC Chapter 17 requirements.
- D. Product will be considered defective if it does not pass tests and inspections. All nonconforming work/material shall be promptly corrected by the Contractor at their own expense.

- E. Prepare test and inspection reports.
- F. Manufacturers Field Service: Engage manufacturers' factory-authorized service representatives for consultation and Project-site inspection and to provide on-site assistance when requested by Engineer.
 - 1. Have manufacturers' factory-authorized service representatives perform the following number of regular Project-site inspections to observe progress and quality of the Work, distributed over the period of product installation, regardless of on-site assistance requested by Engineer:
 - a. Bonding-Agent and Packaged Patching-Mortar Installation: Three inspections.
 - b. Joint-Filler Installation: Two inspections.
 - c. Crack-Injection-Adhesive Preparation and Installation: Six inspections.
 - d. MSM Overlay: Two inspections, but performed by construction site manager.
 - e. Epoxy modified cementitious structural resurfacing compound/pore filling mortar. Two inspections.
 - f. Polyurethane waterproofing membrane/coating. Three inspections.

3.16 CONCRETE MAINTENANCE SCHEDULE

- A. Concrete Walls, Structural Slabs, SOG, etc.: Perform the following as indicated on Drawings:
 - 1. Removal of deteriorated concrete and subsequent replacement and patching.
 - 2. Floor joint repair.
 - 3. Epoxy crack injection.
 - 4. Structural slab surface preparation and subsequent MSM concrete overlay installation.
 - 5. Epoxy modified cementitious structural resurfacing.
 - 6. Concrete protection via polyurethane waterproofing membrane/coating.

END OF SECTION 030130

SECTION 055200 – ALUMINUM HANDRAILS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK

- A. The Contractor, under this section, shall provide and install all aluminum handrailing as shown on the Drawings or as directed. Unless otherwise shown on the Drawings, all handrailing shall be aluminum.
- B. It is the intent of this Contract that the final installation shall be complete in all respects, and the Contractor will be responsible for all minor details, whether or not shown on the Drawings or specifically included in these Specifications.

1.3 QUALITY ASSURANCE

- A. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.

1.4 SUBMITTALS

- A. Submit manufacturer's certificates indicating the meeting of all OSHA requirements.
- B. Contractor alternate design and/or plan modification of specified handrail shall require a PE stamp of an engineer licensed within the state of Ohio.

PART 2 - PRODUCTS

2.1 HANDRAILING

- A. Aluminum pipe rails and posts shall be 1-1/2 in. nominal diameter pipe made of alloy 6063-T6. Aluminum handrail shall be anodized. The color shall be selected by the Engineer. Railing components, fastenings, and complete structure shall meet all requirements of OSHA. All rails and posts shall be Schedule 40.
- B. All handrails, unless otherwise shown on the Drawings, shall be as follows:
 - 1. All bottom mounted rails should be 3 ft.-6 in. high, measured from the floor to the top of the rail, with intermediate rail on the posts. Posts shall be placed at a maximum of 6 ft. and at each change in direction. Posts shall be attached to the top

- of the walkway or curb as shown on the Drawings. Posts into the walkway shall be provided with a floor flange to present a pleasing appearance.
2. Bends, where called for, shall be shop formed and present pleasing appearance.
 3. All openings in the railing shall be spanned with a 1/4 in. type 304 stainless steel chain with snap hook at one end and fixed to post at other end. Hooks and eyes shall be stainless steel.

2.2 PAINTING

- A. Direct contact between aluminum components and any dissimilar metals shall be prevented by painting the dissimilar metal with primer or asphalt paint.
- B. Direct contact between aluminum components and concrete or mortar shall be prevented by painting exposed aluminum surfaces with bituminous paint or water white methacrylate lacquer.
- C. Mechanical finishing shall be in accordance with NAAMM Finishes Manual. Electro-chemical, chemical, organic finishes on metal shall conform to industry standards.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All work performed shall be in accordance with the manufacturer's recommendation for installation.
- B. All work shall be free from defects of any type which affect durability, strength, or appearance.
- C. Support brackets shall be securely anchored into the wall by anchor bolts or wedge type expansion bolts.
- D. Posts shall be set in approved floor flanges attached to the floor or curb by stainless steel concrete anchor bolts in new concrete or holes bored into existing concrete and secured in the new sockets or holes. The boring of holes in existing concrete shall be included in this Item.
- E. All erection shall meet OSHA requirements and the manufacturer's recommendations.
- F. Upon completion of railing installation all work shall be cleaned to make it acceptable for final inspection.
- G. For protection from temperature induced stresses an expansion joint and gap shall be provided in every top rail on a maximum of 24 feet. Top rails only shall have expansion joints between the fixed points. Use 1/8 inch gap between bottom rail and each fitting.

END OF SECTION 055200

SECTION 055300 – ALUMINUM FLOOR GRATING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK

- A. This section includes the furnishing and the installing of all aluminum floor gratings as shown on the Drawings and necessary to complete the work of this contract. Gratings include all clips, spacers, frames, supports, fasteners, and other incidental materials needed for a complete installation.
- B. Floor grating and frames shall be as detailed on Drawings.

1.3 QUALITY ASSURANCE

- A. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.

1.4 SUBMITTALS

- A. Samples of each type of floor gratings proposed shall be submitted for approval prior to placement of purchase orders.
- B. Manufacturer's catalog data showing:
 - 1. Dimensions, spacing, and construction of grating.
 - 2. Design tables showing limits for span length and deflection under various uniform and concentrated loads.
 - 3. Materials of construction.
- C. Detail shop drawings showing:
 - 1. Dimensions of each grating.
 - 2. Sectional assembly.
 - 3. Location and identification mark.
 - 4. Size and type of supporting frames required.
- D. Submittals of contractor design and/or plan modification of specified grating shall require a PE stamp of design engineer licensed within the State of Ohio.

PART 2 - PRODUCTS

2.1 ALUMINUM FLOOR GRATING

- A. Material for aluminum floor gratings shall be aluminum alloy 6061-T6 and 6063-T5 for structural supports and frames in accordance with the latest ASTM Specification B221.
- B. Gratings shall be furnished with a standard mill finish.
- C. Aluminum bar gratings shall be designed for a live load of 300 lbs./sq. ft., except that when located in a roadway it shall be designed to carry a truck rear axle load of 24,000 lbs. Maximum deflection under 100 lbs./sq. ft. load shall not exceed 1/4-in. or 1/180th of the span, whichever is least. Gratings shall be 1-1/2 in. deep with spacer bars spaced not more than 4 in. unless otherwise shown, specified or required.
- D. Banding of the ends of bearing bars and around openings through the panels shall be provided by 1/4-in. aluminum bars of the same depth as the panels.
- E. Grating shall be fabricated from field dimensions taken after facilities requiring passage through the gratings are in place.
- F. Individual grating panels shall not exceed a total weight of 125 lbs. unless otherwise shown or specified.
- G. Grating frames shall conform to details on the Drawings. Frames shall be shop welded with full strength welds and all exposed welds ground flush.
- H. In a case where frames would be large and bending could occur, field jointing shall be allowed using mechanical joints. All frames shall be adequately braced and strapped to wood blocking during shipment and installation to prevent damage.

2.2 PAINTING

- A. Direct contact between aluminum components and any dissimilar metals shall be prevented by painting the dissimilar metal with primer or asphalt paint.
- B. Direct contact between aluminum components and concrete or mortar shall be prevented by painting aluminum contact surfaces with bituminous paint or water white methacrylate lacquer.
- C. Provide mill finish as fabricated in accordance with NAAMM Finishes Manual.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. The gratings shall be installed in angle frames set in the floor or fastened thereto to support the gratings. The tops of the gratings shall be set flush with the surface of the floor in which it is installed. No panel shall rock when any part of it is stepped on.
- B. A maximum spacing of 1/4 in. shall be maintained between the grating and adjacent surfaces.
- C. Type 304 stainless steel fasteners shall be installed where indicated on the Drawings or required.

END OF SECTION 055300

SECTION 071116 - CONCRETE WATERPROOFING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK

- A. Under this section the Contractor shall furnish and apply the waterproofing materials necessary for the protection of concrete surfaces.
- B. These materials shall be designed to protect the concrete surfaces against the penetration of moisture and the disintegrating influences of alkalis, acids, and frost.
- C. Other finishes for concrete surfaces are included in Painting.

1.3 QUALITY ASSURANCE

- A. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. The Contractor shall comply with manufacturer's recommendations as to environmental conditions under which waterproofing systems can be applied and to all applicable OSHA requirements.
- B. Face masks shall be used when applying toxic material in enclosed rooms or chambers, regardless of the amount of ventilation provided.
- C. Exterior waterproofing shall not be done during or immediately following rainy or frosty weather or when the temperature is below 50 degrees F or likely to drop below freezing during drying period. The application of treatment while surfaces are exposed to the hot sun, or when the temperature is above 90 degrees F, or likely to be during the drying period, shall be avoided.
- D. Waterproofing material shall not be applied in areas where dust is being generated.

1.5 SUBMITTALS

- A. The Contractor shall submit complete descriptive literature from the manufacturer for each type of special waterproofing material he proposes to use. If requested by the Engineer, the Contractor shall submit the manufacturer's complete formula for the special material if different from those mentioned in the specifications, in order that the Engineer may determine that the proposed materials are equal to those specified.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Type A Waterproofing

1. Type A shall be a bituminous material in a liquid form that is suitable for cold application.
2. It shall be of such a nature as to bond firmly to the concrete surface without the use of primers and to maintain sufficient elasticity to perform its protective function permanently in spite of cracks which develop.
 - a. Concrete surfaces shall be sand blasted in accordance with SSPC-SP7 Brush-off Blast Cleaning.
 - b. Concrete surfaces shall be clean and dry in accordance with ACI 515.
3. In a nonpotable water situation, Type A shall be "Bitumastic Super Service Black" by Kop-Coat Division of Carboline System, "Series 46H-413 Hi-Build Tneme-Tar" by Tnemec, or Coal Cat 97-640 Series by PPG Industries.

PART 3 - EXECUTION

3.1 PREPARATION

- A. All surfaces which are to be treated shall be thoroughly cleaned and dried in conformance with manufacturer's recommendations.

3.2 APPLICATION

A. Type A

1. Type A shall be applied to all concrete bottom slabs, walls, and columns in contact with water from bottom to one foot above high water level unless noted otherwise.
2. Type A shall be applied in two coats. Each coat shall have a coverage rate of 60 to 80 sq. ft. per gallon.

END OF SECTION 071116

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes joint sealants for the following locations:
 - 1. Exterior joints in vertical surfaces and nontraffic horizontal surfaces as indicated below:
 - a. Control and expansion joints in unit masonry.
 - b. Perimeter joints between materials listed above and frames of doors and windows.
 - c. Other joints as indicated.
 - 2. Interior joints in vertical surfaces and horizontal nontraffic surfaces as indicated below:
 - a. Control and expansion joints on exposed interior surfaces of exterior walls.
 - b. Perimeter joints of exterior openings where indicated.
 - c. Vertical control joints on exposed surfaces of interior unit masonry and concrete walls and partitions.
 - d. Perimeter joints between interior wall surfaces and frames of interior doors, windows, and elevator entrances.
 - e. Perimeter joints of toilet fixtures.
 - f. Other joints as indicated.
- B. Related Sections: The following Sections contain requirements that relate to this Section:

1.3 SYSTEM PERFORMANCE REQUIREMENTS

- A. Provide elastomeric joint sealants that have been produced and installed to establish and to maintain watertight and airtight continuous seals without causing staining or deterioration of joint substrates.

1.4 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product data from manufacturers for each joint sealant product required.
 - 1. Certification by joint sealant manufacturer that sealants plus the primers and cleaners required for sealant installation comply with local regulations controlling use of volatile organic compounds.

- C. Samples for initial selection purposes in form of manufacturer's standard bead samples, consisting of strips of actual products showing full range of colors available, for each product exposed to view.
- D. Samples for verification purposes of each type and color of joint sealant required. Install joint sealant samples in 1/2-inch (13-mm) wide joints formed between two 6-inch (150-mm) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- E. Certificates from manufacturers of joint sealants attesting that their products comply with specification requirements and are suitable for the use indicated.
- F. Product test reports for each type of joint sealants indicated, evidencing compliance with requirements specified.
- G. Preconstruction field test reports indicating which products and joint preparation methods demonstrate acceptable adhesion to joint substrates.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced Installer who has completed joint sealant applications similar in material, design, and extent to that indicated for Project that have resulted in construction with a record of successful in-service performance.
- B. Pre-Installation Conference: Conduct conference at Project site to comply with requirements of the Division 1 Section covering this activity.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in original unopened containers or bundles with labels indicating manufacturer, product name and designation, color, expiration period for use, pot life, curing time, and mixing instructions for multicomponent materials.
- B. Store and handle materials in compliance with manufacturer's recommendations to prevent their deterioration or damage due to moisture, high or low temperatures, contaminants, or other causes.

1.7 PROJECT CONDITIONS

- A. Environmental Conditions: Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside the limits permitted by joint sealant manufacturer.
 - 2. When ambient and substrate temperature conditions are outside the limits permitted by joint sealant manufacturer or below 40 deg F (4 deg C).
 - 3. When joint substrates are wet.
- B. Joint Width Conditions: Do not proceed with installation of joint sealants where joint widths are less than allowed by joint sealant manufacturer for application indicated.

- C. Joint Substrate Conditions: Do not proceed with installation of joint sealants until contaminants capable of interfering with their adhesion are removed from joint substrates.

1.8 SEQUENCING AND SCHEDULING

- A. Sequence installation of joint sealants to occur not less than 21 nor more than 30 days after completion of waterproofing, unless otherwise indicated.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

- A. Compatibility: Provide joint sealants, joint fillers, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
- B. Colors: Provide color of exposed joint sealants to comply with the following:
 - 1. Provide selections made by Architect from manufacturer's full range of standard colors for products of type indicated.

2.2 ELASTOMERIC JOINT SEALANTS

- A. Elastomeric Sealant Standard: Provide manufacturer's standard chemically curing elastomeric sealants that comply with ASTM C 920 and other requirements indicated on each Elastomeric Joint Sealant Data Sheet at end of this Section, including those requirements referencing ASTM C 920 classifications for Type, Grade, Class, and Uses.
- B. Products: Subject to compliance with requirements, provide one of the products specified in each Elastomeric Joint Sealant Data Sheet.

2.3 LATEX JOINT SEALANTS

- A. General: Provide manufacturer's standard one-part, nonsag, mildew-resistant, paintable latex sealant of formulation indicated that is recommended for exposed applications on interior and protected exterior locations and that accommodates indicated percentage change in joint width existing at time of installation without failing either adhesively or cohesively.
- B. Acrylic-Emulsion Sealant: Provide product complying with ASTM C 834 that accommodates joint movement of not more than 5 percent in both extension and compression for a total of 10 percent.
- C. Products: Subject to compliance with requirements, provide one of the following:
 - 1. Acrylic-Emulsion Sealant:
 - a. "AC-20," Pecora Corp.
 - b. "Sonolac," Sonneborn Building Products Div., ChemRex, Inc.
 - c. "Tremco Acrylic Latex 834," Tremco, Inc.

2.4 ACOUSTICAL JOINT SEALANTS

- A. Acoustical Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834 and the following requirements:
 - 1. Product is effective in reducing airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies per ASTM E 90.
- B. Acoustical Sealant for Concealed Joints: Manufacturer's standard, nondrying, nonhardening, nonskinning, nonstaining, gunnable, synthetic rubber sealant recommended for sealing interior concealed joints to reduce transmission of airborne sound.
- C. Products: Subject to compliance with requirements, provide one of the following:
 - 1. Acoustical Sealant:
 - a. "SHEETROCK Acoustical Sealant," United States Gypsum Co.
 - b. "AC-20 FTR Acoustical and Insulation Sealant," Pecora Corp.
 - 2. Acoustical Sealant for Concealed Joints:
 - a. "BA-98," Pecora Corp.
 - b. "Tremco Acoustical Sealant," Tremco, Inc.

2.5 PREFORMED FOAM SEALANTS

- A. Preformed Foam Sealants: Manufacturer's standard preformed, precompressed, impregnated open-cell foam sealant manufactured from high-density urethane foam impregnated with a nondrying, water repellent agent; factory-produced in precompressed sizes and in roll or stick form to fit joint widths indicated and to develop a watertight and airtight seal when compressed to the degree specified by manufacturer; and complying with the following requirements:
 - 1. Properties: Permanently elastic, mildew-resistant, nonmigratory, nonstaining, and compatible with joint substrates and other joint sealants.
 - 2. Impregnating Agent: Manufacturer's standard.
 - 3. Density: Manufacturer's standard.
 - 4. Backing: None.
 - 5. Products: Subject to compliance with requirements, provide one of the following:
 - a. "Emseal," Emseal Corp.
 - b. "Wil-Seal 150," Wil-Seal Construction Foams Div., Illbruck.

2.6 JOINT SEALANT BACKING

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

- B. Plastic Foam Joint Fillers: Preformed, compressible, resilient, nonstaining, nonwaxing, nonextruding strips of flexible plastic foam of material indicated below and of size, shape, and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Closed-cell polyethylene foam, nonabsorbent to liquid water and gas, nonoutgassing in unruptured state.
 - 2. Proprietary, reticulated, closed-cell polymeric foam, nonoutgassing, with a density of 2.5 pcf (40 kg/cu. m) and tensile strength of 35 psi (240 kPa) per ASTM D 1623, and with water absorption less than 0.02 g/cc per ASTM C 1083.
 - 3. Any material indicated above.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape as recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.7 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming in any way joint substrates and adjacent nonporous surfaces, and formulated to promote optimum adhesion of sealants with joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint sealant performance. Do not proceed with installation of joint sealants until unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with recommendations of joint sealant manufacturer and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings

tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.

2. Clean concrete, masonry, unglazed surfaces of ceramic tile, and similar porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air.
 3. Remove laitance and form release agents from concrete.
 4. Clean metal, glass, porcelain enamel, glazed surfaces of ceramic tile, and other nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
- B. Joint Priming: Prime joint substrates where indicated or where recommended by joint sealant manufacturer based on preconstruction joint sealant-substrate tests or prior experience. Apply primer to comply with joint sealant manufacturer's recommendations. Confine primers to areas of joint sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint sealant manufacturer's printed installation instructions applicable to products and applications indicated, except where more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations of ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Acoustical Sealant Application Standard: Comply with recommendations of ASTM C 919 for use of joint sealants in acoustical applications as applicable to materials, applications, and conditions indicated.
- D. Installation of Sealant Backings: Install sealant backings to comply with the following requirements:
1. Install joint fillers of type indicated to provide support of sealants during application and at position required to produce the cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - a. Do not leave gaps between ends of joint fillers.
 - b. Do not stretch, twist, puncture, or tear joint fillers.
 - c. Remove absorbent joint fillers that have become wet prior to sealant application and replace with dry material.

- E. Installation of Sealants: Install sealants by proven techniques that result in sealants directly contacting and fully wetting joint substrates, completely filling recesses provided for each joint configuration, and providing uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability. Install sealants at the same time sealant backings are installed.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and prior to time skinning or curing begins, tool sealants to form smooth, uniform beads of configuration indicated, to eliminate air pockets, and to ensure contact and adhesion of sealant with sides of joint. Remove excess sealants from surfaces adjacent to joint. Do not use tooling agents that discolor sealants or adjacent surfaces or are not approved by sealant manufacturer.
 - 1. Provide concave joint configuration per Figure 5A in ASTM C 1193, unless otherwise indicated.
 - 2. Provide recessed joint configuration, per Figure 5C in ASTM C 1193, of recess depth and at locations indicated.
- G. Installation of Preformed Foam Sealants: Install each length of sealant immediately after removing protective wrapping, taking care not to pull or stretch material, and to comply with sealant manufacturer's directions for installation methods, materials, and tools that produce seal continuity at ends, turns, and intersections of joints. For applications at low ambient temperatures where expansion of sealant requires acceleration to produce seal, apply heat to sealant in conformance with sealant manufacturer's recommendations.

3.4 CLEANING

- A. Clean off excess sealants or sealant smears adjacent to joints as work progresses by methods and with cleaning materials approved by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately so that installations with repaired areas are indistinguishable from original work.

PRODUCT DATA SHEET 1 - ELASTOMERIC JOINT SEALANT

- A. Elastomeric Joint Sealant Designation: ES# 1
- B. Base Polymer: Urethane.
- C. Type: S (single component).
- D. Grade: NS (nonsag).

E. Use[s] Related to Exposure: NT (nontraffic).

F. Available Products:

1. "Chem-Calk 900"; Bostik Construction Products Div.
2. "Chem-Calk 2639"; Bostik Construction Products Div.
3. "Vulkem 116"; Mameco International, Inc.
4. "Vulkem 921"; Mameco International, Inc.
5. "Dynatrol I"; Pecora Corp.
6. "Permapol RC-1"; Products Research & Chemical Corp.
7. "Sikaflex-1a"; Sika Corp.
8. "Sikaflex-15LM"; Sika Corp.
9. "Sonolastic NP 1"; Sonneborn Building Products Div., Rexnord Chemical Products Inc.
10. "Dymonic"; Tremco Inc.

END OF SECTION 079200

SECTION 079200.02 - CAULKING AND SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK

- A. The Contractor shall furnish all the material for and do all work required to caulk all joints, (both inside and outside of jambs, heads, and sills) between metal doors, windows and masonry and stone work.
- B. The Contractor shall also caulk all joints, exterior steel beams, lintels, etc., and masonry and any other caulking required for the proper completion of the work of this contract.

1.3 QUALITY ASSURANCE

- A. In addition to requirements of these specifications, comply with manufacturer's instructions and recommendations for work.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Deliver and store materials in manufacturer's original unopened containers.
- B. Store materials on site under protective covering and off the ground.

1.5 SUBMITTALS

- A. The Contractor shall submit the following samples:
 - 1. Transparent primer for dry masonry and concrete - 1 quart
 - 2. Primers for joints that will be under water - 1 quart
 - 3. Gun grade sealant compound - 1 quart
 - 4. Sample of exterior joint between masonry and metal
 - 5. Sample of interior joint caulking and colors

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Caulking around entrance doors, and doors and windows with colored anodized aluminum frames shall match as nearly as practicable. Surfaces which come in contact with caulking material shall be freed from dirt, loose particle, grease, paint and putty. Where the space around frames are large and deep, they shall be packed tightly with back-up material to

within one-half (1/2) inch of the surface and caulked. The compound shall be applied with a gun under pressure of not less than one hundred fifteen (115) pounds. Joints shall be completely filled and properly finished with a bead.

- B. One component synthetic rubber sealant, based on thiokol polysulfide liquid polymer.
- C. Product must be guaranteed to be nonstaining where installed in accordance with manufacturer's recommendations.
- D. Acceptable products shall be one component Sonnelastic Sealant by Sonneborn Chemical & Roofing Co., one component Hornflex by W.R. Grace Co., Synthacalk GC-9 by Pecora Chemical Corp., or equal.
- E. Primer solvents and cleaners shall be nonstaining, and of a type proven by tests to be compatible with the sealant used and of a brand approved by the sealant manufacturer.
- F. Back-up material shall be nonstaining, compressible rods or tubes of expanded polyethylene foam or extruded synthetic rubber. Material must be compatible with sealant used and recommended by manufacturer. No material shall be used that is impregnated with oils, asphalt, or solvents that tend to bleed.
- G. Interior caulking compound shall be nonstaining and shall not bleed through when painted over.
- H. Caulking compound shall be 2-part polysulfide sealant, "Chem-Calk 400" by Bostik Construction Products Division, or equal. Primers and backing material shall be according to manufacturer's recommendations.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine joints and spaces where caulking and sealants are to be applied to assure they are clean and dry and free of conditions that would affect the quality of the work.
- B. Preparation
 - 1. Joints shall be approximately 1/2 inch in depth; if deeper, install back-up material to within 1/2 inch of face of adjoining surfaces.
 - 2. All surfaces of both exterior and interior joints shall be thoroughly cleaned and must be dry prior to application of sealant or caulking compound.
 - 3. Protective coating such as lacquers, rust-preventing coatings, or wax film, etc., must be removed from aluminum or other metal surfaces where sealant is to be applied.
 - 4. Brick, block, concrete, precast concrete, mortar joints, etc., shall be brushed clean and all loose particles removed. Joints in the above surfaces shall be primed as recommended by the manufacturer of the sealant used, and allowed to become dry before sealant is applied.

5. Joints adjacent to stone and other surfaces other than masonry shall have masking tape applied to protect the surfaces from excess sealant. Tape shall be removed as soon as possible after joint is caulked before sealant begins to set.
- C. Application shall be made with a caulking gun with proper sizes of nozzles to fit joints. Sealant shall be applied with sufficient pressure to completely fill joints and no sealant shall be applied with temperature below 40 degrees F.

END OF SECTION 079200.02

SECTION 099700 - SPECIAL COATINGS

PART 1 – GENERAL

1.1 SUMMARY

- A. Work covered by this Section includes the furnishing and application of paints, stains, primers, varnishes and other finish, decorative and protective coatings.
- B. Shop priming and factory prefinishing are required on some, but not necessarily all, of the items described in other sections.
- C. Extent of work:
 - 1. All new process equipment and process piping.
 - 2. All building and room surfaces as indicated on the plans or as scheduled.
 - 3. All conduits, ducts, drains, etc of other trades unless such product is deemed having an acceptable factory pre-finish, under the following conditions:
 - a. When specifically called out as requiring special coating protection.

1.2 DEFINITIONS

- A. Special coating systems are defined as those types of materials and methods of application requiring more than normal skills and techniques for mixing, handling and application, as specified in the "Painting" section.
 - 1. The term "special coating systems" as used in this section includes applied materials used in prime, intermediate and finish coats.
 - 2. The word "paint", as applied in this and or other Sections shall apply to all special coatings required herein for the protection of materials from corrosive environment, weathering processes, or for aesthetic or other reasons.
 - 3. The term "exposed surfaces" is defined to include areas visible when permanent or built-in fixtures, convector covers, covers for finned tube radiation, grilles, and similar components are in place in areas to be coated. Extend special coatings in these areas as required to maintain the coating system integrity and provide desired protection.

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer's technical information including basic materials analysis and application instructions for each coating material specified.
 - 1. List each material and cross-reference to the specific coating and finish system and application. Identify each material by the manufacturer's catalog number and general classification.
 - 2. In the event that the submittal requests a substitution then the following ASTM test results from an independent testing laboratory for the referenced products shall be included:

ASTM B 117 Salt Fog
ASTM D 3359 (Method A and B) Adhesion Test
ASTM G8, Method A Cathodic Disbondment
ASTM D 4541 (Elcometer)
ASTM D 4060 Taber Abrasion
ASTM D 522 (Conical Mandrel)
ASTM D 3363 Pencil Hardness
ASTM D 2794 Impact
ASTM G 53 QUV Exposure
ASTM D 2240 Durometer, Shore D
ASTM D 870 Immersion (Potable Water)
ASTM E 96 Moisture Vapor Transmission
ASTM D 2370 Tensile Strength and Elongation
ASTM D 638 Tear Strength

- B. Manufacturer's representative color and texture sample cards shall be submitted to the Engineer at least 30 days prior to paint application. Contractor shall coordinate work so as to allow sufficient time for paint to be delivered to the job site.

1.4 QUALITY ASSURANCE

- A. Single Source Responsibility: Provide primers and other undercoat material produced by the same manufacturer as the finish coats. Use only thinners recommended by the manufacturer, and only within recommended limits.
- B. Coordination of Work: Review other sections of these specifications in which other coatings are to be provided to ensure compatibility of the total coatings systems for various substrates.
1. Upon request, furnish information on the characteristics of pre-primed materials, to ensure that provisions for specified finish coats can be appropriately applied.
 2. Notify the Engineer of any anticipated problems involved in using the coatings systems as specified.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to the job site in the manufacturer's original, new, unopened packages and containers bearing manufacturer's name and label and the following information:
1. Name or title of material.
 2. Federal Specification number, if applicable.
 3. Manufacturer's stock number and date of manufacture.
 4. Manufacturer's name.
 5. Contents by volume, for major pigment and vehicle constituents.
 6. Thinning instructions.
 7. Application instructions.
 8. Color name and number.
 9. Handling instructions and precautions.

- B. Store materials not in actual use in tightly covered containers at a minimum ambient temperature of 45 deg. F (7 deg. C) in a well ventilated area. Maintain containers used in storage of coatings in a clean condition, free of foreign materials and residue.
 - 1. Protect from freezing where necessary. Keep storage area neat and orderly. Remove oily rags and waste daily. Take all necessary precautionary measures to ensure that workmen and work areas are adequately protected from fire hazards and health hazards resulting from handling, mixing and application of stains.
- C. No material shall be applied unless the containers are opened in the presence of the Owner's Representative.

1.6 PROJECT CONDITIONS

- A. Apply coatings only when the temperature of surfaces to be coated and surrounding air temperatures are above 45 deg. F (7 deg. C), unless otherwise permitted by manufacturer's printed instructions.
- B. Do not apply coatings in snow, rain, fog or mist, or when the relative humidity exceeds 85%, or to damp or wet surfaces unless otherwise permitted by manufacturer's printed instructions. Allow wet surfaces to dry thoroughly and attain the temperature and conditions specified before proceeding with or continuing with the coating operation.
 - 1. Work may continue during inclement weather only if areas and surfaces to be coated are enclosed and the temperature within the area can be maintained within limits specified by the manufacturer during application and drying periods.
- C. Report to responsible person such as safety personnel, General Trades Superintendent, etc., any condition which may pose a threat to the health and welfare of employees.
- D. Keep working area clean and safe.
- E. Obey all job site rules and regulations.
- F. Surfaces not to be painted; unless specifically stated otherwise:
 - 1. Face brick
 - 2. Pre-finished wall panels, partitions and ceiling tile
 - 3. Items with acceptable factory-applied final finish
 - 4. Concealed ducts, pipes and conduit.
 - 5. Glass, Aluminum, Copper, Bronze, Stainless Steel

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products of one of the following:
 - 1. Tnemec Company, Inc., North Kansas City, Missouri
 - 2. Carboline Company, At. Louis, Missouri
 - 3. Sherwin Williams Company, Cleveland, Ohio

- B. Material Quality: Provide the best quality grade of the various types of coatings as regularly manufactured by acceptable coating manufacturers. Materials not displaying manufacturer's identification as a standard, best-grade product will not be acceptable.
- C. Proprietary names to designate colors or materials are not intended to imply that products of named manufacturers are required to the exclusion of equivalent products of other manufacturers.
- D. Request for substitution shall include manufacturer's literature for each product giving the name, product number, generic type, descriptive information, solids by volume, recommended dry film thickness and certified test reports showing results to equal the performance criteria of the products listed herein.

2.2 COATING SYSTEMS

A. Ferrous Metal:

1. Submerged, Non-Potable

Surface Preparation: SSPC-SP10 Near White Blast

First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 3.0-5.0 mils dry

Carboline Carboguard 890 @ 3.0 - 5.0 DFT

Sherwin Williams Dura-Plate 235 at 3.0-5.0 mils DFT

Second Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 6.0-8.0 mils dry

Carboline Carboguard 890 @ 4.0 - 6.0 DFT

Sherwin Williams Dura-Plate 235 at 5.0-8.0 mils DFT

NOTE: If shop primed, field surface preparation for weld seams and abraded areas is SSPC-SP-10 and spot prime with Series 161 @ 3-5 mils dry or Carboline Carboguard 890 @ 3.0 - 5.0 DFT or Sherwin Williams Dura-Plate 235 @3.0-5.0 mils DFT.

2. Non-Submerged, Interior Exposure

Surface Preparation: SSPC-SP6 Commercial Blast

First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 3.0-5.0 mils dry

Carboline Carboguard 60 @ 3.0 - 5.0 DFT

Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT

Second Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 4.0-6.0 mils dry

Carboline Carboguard 60 @ 4.0 - 6.0 DFT

Sherwin Williams Macropoxy 646 at 4.0-6.0 mils DFT

NOTE: If shop primed, field surface preparation for weld seams and abraded areas is SSPC-SP-10 and spot prime with Series N69 @ 3-5 mils dry or Carboline Carboguard 60 @ 3.0 - 5.0 DFT or Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT.

3. Non-Submerged, Exterior Exposure

Surface Preparation: SSPC-SP6 Commercial Blast

First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 3.0-5.0 mils dry

Carboline Carboguard 60 @ 3.0 - 5.0 DFT
Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT

Second Coat: Tnemec Series 1075 Endura-Shield II @ 2.0-4.0 mils dry

Carboline Carbothane 133 LH @ 3.0 - 5.0 DFT
Sherwin Williams Acrolon 218 HS or Hi-Solids
Polyurethane at 3.0-5.0 mils DFT

NOTE: If shop primed, field surface preparation for weld seams and abraded areas is SSPC-SP-6 and spot prime with Series N69 @ 3-5 mils dry or Carboline Carboguard 60 @ 3.0 - 5.0 DFT or Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT.

4. Galvanized Steel (including Bar Joist and Galvanized Steel)

Surface Preparation: SSPC-SPI Solvent Clean on galvanized surfaces.

SSPC-SP7 Brush-Off blast to lightly profile surface.

First Coat: N69 Hi-Build Epoxoline II @ 2.0-4.0 mils dry

Carboline Carboguard 888 @ 3.0 - 4.0 DFT
Sherwin Williams Macropoxy 646 at 3.0-4.0 mils DFT

B. Non-Ferrous Metals:

1. Interior Exposure

Surface Preparation: SSPC-SP1 Solvent Clean and Scarify per SSPC-SP 3

First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 2.0-3.0 mils dry

Carboline Carboguard 60 @ 3.0 - 5.0 DFT
Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT

Second Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 3.0-5.0 mils dry

Carboline Carboguard 60 @ 3.0 - 5.0 DFT
Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT

2. Exterior Exposure

Surface Preparation: SSPC-SP1 Solvent Clean and Scarify per SSPC-SP 3

First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 2.0-3.0 mils dry

Carboline Carboguard 60 @ 3.0 - 5.0 DFT

Sherwin Williams Macropoxy 646 at 3.0-5.0 mils DFT

Second Coat: Tnemec Series 1075 Endura-Shield @ 2.0-4.0 mils dry
Carboline Carbothane 133 LH @ 3.0 - 5.0 DFT
Sherwin Williams Acrolon 218 HS or Hi-Solids
Polyurethane at 3.0-5.0 mils DFT

- C. Wood
- Surface Preparation: Clean and dry
- First Coat: Tnemec Series 36-603 Undercoater @ 300 sq.ft. per gal.
 Carboline Carbocrylic 120 @ 1.0 - 2.0 DFT
 Sherwin Williams Multi Purpose Primer at 1.0-2.0 mils DFT
- Second Coat: Tnemec Series 23 Enduratone @ 400 sq.ft. per gal.
 Carboline Carbocoat 8215 @ 400 sq. ft. per gal.
 Sherwin Williams Pro Mar 200 Alkyd at 400 sqft per gal
- Third Coat Tnemec Series 23 Enduratone @ 400 sq.ft. per gal.
 Carboline Carbocoat 8215 @ 400 sq. ft. per gal.
 Sherwin Williams Pro Mar 200 Alkyd at 400 sqft per gal
- D. PVC Pipe
- Surface Preparation: Lightly sand
- First Coat: Tnemec Series N69 Hi-Build Epoxoline II @ 200 sq.ft. per gal.
- Carboline Carboguard 60 @ 200 sq. ft. per gal.
 Sherwin Williams Macropoxy 646 at 200 sqft per gal

2.3 COLOR CODING AND PROCESS SYSTEM IDENTIFICATION

- A. The following color coding is suggested for **wastewater** transport and treatment systems. Color coding for processing piping, equipment and appurtenances is a suggested system unless otherwise specified or requested by Owner. Final coding to be determined in the field:
1. Equipment - light gray with O.S.H.A. orange coupling guards and O.S.H.A. yellow belt guards.
 2. Pipe Supports - hangers to be same color as piping applied, floor post to be same as adjacent wall color, and fabricated racks to be manufacturer's standard protective finish or paint same as adjacent wall color if not having a suitable protective finish.
 3. Process piping-exposed interior or exterior:
 - a. Submerged Pipe or Supports - Black
 - b. Intermittently Submerged Metals - Black (unless piping as defined otherwise)
 - c. Raw wastewater - Medium Grey*
- *These colors are recommended as standard by WEF.
- C. Miscellaneous, non-process related items such as electrical conduit, duct work, roof drains, etc. are to be properly prepped and finished to match adjacent wall or ceiling color.
1. In situations where two colors do not have sufficient contrast to easily differentiate between them, a six (6) inch band of contrasting color shall be on one of the pipes at approximately thirty (30) inch intervals.

3.2 SURFACE PREPARATION

A. General:

1. Dislodge dirt, rust, plaster nibs, mortar spatter and other dry material by scraping or brushing. Remove dust and loose material by brushing, sweeping, vacuuming or blowing with high-pressure air.
2. Remove oil, wax and grease by scraping off heavy deposits and cleaning with mineral spirits or a hot trisodium phosphate solution followed by a water rinse.
3. Verify that surfaces to be coated are dry, clean and free of dust, dirt, oil, wax grease or other contaminants.

B. Non-Ferrous Metal:

1. SSPC-SPI solvent cleaning to remove all contaminants.

C. Ferrous Metal:

1. Enclosed: Remove loose rust, mill scale and other foreign matter by hand (SSPC-SP2) or power tool (SSPC-SP3) cleaning and apply specified coating before rusting occurs.
2. Non-Submerged, Architecturally Exposed: Society of Protective Coatings, SSPC-SP6 Commercial Blast.
3. Submerged Steel: Society of Protective Coatings, SSPC-SP10 Near White Blast.

D. Galvanized Metal:

1. Remove contaminants and protective mill coating by SSPC-SP1 Solvent Cleaning or steam cleaning. All surfaces shall be prepared by light brush blasting to achieve a minimum 1.0 mil abrasive blast profile

E. Wood:

1. Remove surface deposits of sap and pitch by scraping and cleaning with mineral spirits.
2. Seal knots and pitch pockets with a product manufactured for this specific purpose.
3. Sand rough spots of smooth siding and finish woodwork.
4. After prime coat is dry, fill cracks, holes and scratches with suitable wood filler or spackling compound and when dry, sand flush with surface.
5. Sand lightly between coats.

PART 3 - EXECUTION

3.1 PRE-WORK INSPECTION

- A. Examine surfaces to be coated and report conditions that would adversely affect appearance or performance of coating systems and which cannot be put into an acceptable condition by preparatory work specified in Paragraph 3.2.
- B. Do not proceed with surface preparation and application until surface is acceptable or authorization to proceed is given by the Owner's representative.

3.2 SURFACE PREPARATION

A. General:

1. Dislodge dirt, rust, plaster nibs, mortar spatter and other dry material by scraping or brushing. Remove dust and loose material by brushing, sweeping, vacuuming or blowing with high-pressure air.
2. Remove oil, wax and grease by scraping off heavy deposits and cleaning with mineral spirits or a hot trisodium phosphate solution followed by a water rinse.
3. Verify that surfaces to be coated are dry, clean and free of dust, dirt, oil, wax grease or other contaminants.

B. Non-Ferrous Metal:

1. SSPC-SPI solvent cleaning to remove all contaminants.

C. Ferrous Metal:

1. Enclosed: Remove loose rust, mill scale and other foreign matter by hand (SSPC-SP2) or power tool (SSPC-SP3) cleaning and apply specified coating before rusting occurs.
2. Non-Submerged, Architecturally Exposed: Society of Protective Coatings, SSPC-SP6 Commercial Blast.
3. Submerged Steel: Society of Protective Coatings, SSPC-SP10 Near White Blast.

D. Galvanized Metal:

1. Remove contaminants and protective mill coating by SSPC-SP1 Solvent Cleaning or steam cleaning. All surfaces shall be prepared by light brush blasting to achieve a minimum 1.0 mil abrasive blast profile

E. Wood:

1. Remove surface deposits of sap and pitch by scraping and cleaning with mineral spirits.
2. Seal knots and pitch pockets with a product manufactured for this specific purpose.
3. Sand rough spots of smooth siding and finish woodwork.
4. After prime coat is dry, fill cracks, holes and scratches with suitable wood filler or spackling compound and when dry, sand flush with surface.
5. Sand lightly between coats.

3.3 APPLICATION

A. General: Apply special coatings by brush, roller, spray, squeegee, or other applicators in accordance with the manufacturer's directions. Brushes best suited for the type of material being applied. Use rollers of carpet, velvet back, or high-pile sheep's wool as recommended by the manufacturer for the material and texture required.

1. Coating colors, surfaces treatments and finishes are indicated in the "Schedules" of the contract documents.
2. Provide finish coats that are compatible with the primers used.

3. The number of coats and coating film thickness required is the same regardless of the application method. Do not apply succeeding coats until the previous coat has cured as recommended by the coating manufacturer. Sand between coating applications where sanding is required to produce an even smooth surface in accordance with the coating manufacturer's directions.
 4. Coat surfaces behind movable equipment and furniture the same as similar exposed surfaces.
 5. Coat the back sides of access panels, removable or hinged covers, and similar hinged items, to match exposed surfaces.
- B. Minimum Coating Thickness: Apply each material at not thinner than the manufacturer's recommended spreading rate. Provide a total dry film thickness of the entire coating system as recommended by the manufacturer.
- C. Prime Coats: Before the application of finish coats, apply a prime coat, as recommended by the coating manufacturer, to material that is required to be painted or finished, and which has not been prime coated by others.
1. Recoat primed and sealed substrates where there is evidence of suction spots or unsealed areas in the first coat, to assure a finish coat with no burn-through or other defects due to insufficient sealing.
- D. Brush Application: Brush-out and work brush coats into surfaces in an even film. Eliminate cloudiness, spotting, holidays, laps, brush marks, runs, sags, ropiness, or other surface imperfections. Neatly draw glass lines and color breaks.
1. Apply primers and first coats by brush unless the manufacturer's instructions permit use of mechanical applicators.
- E. Mechanical Applications: Use mechanical methods for coating application when permitted by the coating manufacturer's recommendations, governing ordinances, and trade union regulations.
1. Wherever spray application is used, apply each coat to provide the equivalent hiding of brush-applied coats. Do not double-back with spray equipment building-up film thickness of 2 coats in one pass, unless recommended by the coating manufacturer.
- F. Completed Work: Match approved samples for color, texture and coverage. Remove, refinish or recoat work not in compliance with specified requirements.
- G. Spray application will not be permitted for the Primary Clarifier Painting bid item.

3.4 INSPECTION

- A. Request acceptance of each coat before applying succeeding coats.
- B. The Contractor shall furnish the Engineer a suitable thickness detector of a type recommended by the paint manufacturer.

- C. Any field painting found to be defective shall be removed and the surfaces repainted as the Engineer may direct at no additional cost to the Owner.
- D. Before final approval of the work, all damaged surfaces of paint (field or factory applied) shall be cleaned and repainted or touched up as directed.

3.5 FIELD QUALITY CONTROL

- A. The Owner reserves the right to invoke the following material testing procedure at any time, and at any number of times during the period when coating operations are being conducted.
 - 1. The Owner will engage the services of an independent testing laboratory to sample the coating being used. Samples of material delivered to project site will be taken, identified and sealed, and certified in the presence of the Contractor.
 - 2. The testing laboratory will perform appropriate tests for any or all of the following characteristics as required by the Owner:
 - a. Quantitative materials analysis.
 - b. Absorption.
 - c. Accelerated weathering.

3.6 CLEANING

- A. Clean-Up: At the end of each work day during progress of work, remove rubbish, empty cans, rags and other discarded materials from the site.
 - 1. Upon completion of the work, clean window glass and other spattered surfaces. Remove spattered coatings by washing, scraping or other proper methods, using care not to scratch or otherwise damage adjacent finished surfaces.

3.7 PROTECTION

- A. Protect work of other trades, whether to be coated or not, against damage from coating operations. Correct damage by cleaning, repairing or replacing, and recoating as acceptable to the Engineer. Leave the work in an undamaged condition.
- B. Provide "Wet Paint" signs as required to protect newly-coated finishes. Remove temporary protective wrappings provided by others for protection of their work, after completion of coating operations.
 - 1. At completion of the work of other trades, touch-up and restore damaged or defaced coated surfaces.

END OF SECTION

SECTION 400593 - COMMON MOTOR REQUIREMENTS FOR PROCESS EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Motors furnished with equipment.

1.2 SUBMITTALS

A. Product Data:

1. Submit manufacturer information for each motor furnished loose.
2. Indicate nameplate data, compliance with specified standards, electrical ratings and characteristics, physical dimensions, weights, mechanical performance data, and support points.

B. Qualifications Statements: For manufacturer and testing agency.

1.3 QUALITY ASSURANCE

A. Manufacturers Qualifications: Company specializing in manufacturing products specified in this Section with minimum three years' experience.

B. Testing Agency Qualifications: Company in testing products specified in this Section with minimum three years' experience.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Inspection: Accept materials on Site in manufacturer's original packaging and inspect for damage.

B. Storage:

1. Store materials according to manufacturer instructions.
2. For extended outdoor storage, remove motors from equipment and store separately.

C. Protection:

1. Protect materials from moisture and dust by storing in clean, dry location remote from construction operations areas.
2. Provide additional protection according to manufacturer instructions.

1.5 WARRANTY

- A. Furnish one-year manufacturer's warranty for motors furnished loose.

PART 2 - PRODUCTS

2.1 MOTORS FURNISHED WITH EQUIPMENT

- A. Motors 3/4 hp (560 W) and Larger: Three phase.
- B. Motors Smaller Than 3/4 hp (560 W): Single phase, except motors less than 1/4 hp may be equipment manufacturer's standard.
- C. Three-Phase Motors:
 - 1. Energy-efficient squirrel-cage induction motor with windings to accomplish starting methods and indicated number of speeds.
 - 2. Comply with NEMA MG 1, Design B.
 - 3. Characteristics:
 - a. 460 V, three phase, 60 Hz.
 - 4. Service Factor: 1.15.
 - 5. Enclosure: Meet conditions of installation.
 - 6. Design for continuous operation in 104-degree F environment, with temperature rise according to NEMA MG 1 limits for insulation class, service factor, and motor enclosure type.
 - 7. Insulation System: NEMA Class F.
 - 8. Motor Frames: NEMA standard T-frames of steel, aluminum, or cast iron with end brackets of cast iron or aluminum with steel inserts.
 - 9. Thermistor System (Motor Frame Sizes 254T and Larger): Three Positive Temperature Coefficient (PTC) thermistors embedded in motor windings and epoxy-encapsulated solid-state control relay with wiring to terminal box.
 - 10. Bearings:
 - a. Grease-lubricated anti-friction ball bearings with housings equipped with plugged provision for relubrication.
 - b. Comply with ABMA 9.
 - c. L-10 Life: 200,000 hours.
 - d. Stamp bearing sizes on motor nameplate.
 - 11. Sound Power Levels: Comply with NEMA MG 1.
- D. Single-Phase Motors:
 - 1. Permanent split-capacitor type.
 - 2. Characteristics:
 - a. 115/230 V, single phase, 60 Hz.

- E. Wiring Terminations: Furnish terminal lugs to match branch circuit conductor quantities, sizes, and materials.

2.2 SOURCE QUALITY CONTROL

- A. Testing: Test motors according to NEMA MG 1, including winding resistance, no-load speed and current, locked rotor current, insulation high-potential test, and mechanical alignment tests.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Disconnect and remove abandoned motors.
- B. Clean and repair existing motors to remain or those to be reinstalled.

3.2 INSTALLATION OF MOTORS

- A. Existing Installations:
 - 1. Maintain access to existing motors and other installations remaining active and requiring access.
 - 2. Modify installation or provide access panel.
- B. Install motors securely on firm foundation.

3.3 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
 - B. Inspect and test according to NETA ATS, except Section 4.
 - C. Perform inspections and tests as listed in NETA ATS, Section 7.15.
 - D. Prepare test and inspection reports.
- END OF SECTION 400593

SECTION 432359 - SCREW PUMPS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes screw centrifugal pumps.
- B. Related Requirements:
 - 1. Section 400593 "Common Motor Requirements for Process Equipment" for electric motors and accessories normally supplied as part of equipment assemblies.

1.2 COORDINATION

- A. Coordinate installation and startup of Work of this Section with plant operations.

1.3 SUBMITTALS

- A. Product Data: Screw centrifugal pumps.
- B. Shop Drawings:
 - 1. Submit detailed dimensions for materials and equipment, including wiring and control diagrams, performance charts and curves, installation and anchoring requirements, fasteners, and other details.
 - 2. Include manufacturer's specified displacement tolerances for vibration at operational speed specified for pumps.
 - 3. Signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Source Quality-Control Submittals: Indicate results of shop tests and inspections.
- D. Field Quality-Control Submittals: Indicate results of Contractor-furnished tests and inspections.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For screw pumps.

1.5 WARRANTY

- A. Furnish one-year manufacturer's warranty for pumps and accessories.

PART 2 - PRODUCTS

2.1 SCREW CENTRIFUGAL PUMPS

- A. Manufacturers:
 - 1. Hayward Gordon.
- B. Vertical, screw centrifugal pump, with V-belt drive electric motor.
- C. Performance and Design Criteria, RAS:
 - 1. Design Flow Rate: 900/600/400 GPM
 - 2. Design Flow Total Dynamic Head: 35/6/2 TDH
- D. Casing: Cast iron; comply with ASTM A48/A48M, Class 30.
 - 1. Construction: Heavy duty, with removable and replaceable suction cone and backplate.
 - 2. End Connections: Flanged; Comply with ASME B16.1, Class 125.
- E. Impeller: Screw centrifugal, fully open.
 - 1. Material: Cast iron with minimum hardness of 450 Brinell; comply with ASTM A532/A532M.
 - 2. Statically and dynamically balanced after assembly.
 - 3. Attachment: Secured to shaft by key.
- F. Suction Liner: High chrome cast iron with minimum hardness of 450 Brinell; comply with ASTM A532/532M, Class 111, Type A1.
 - 1. Configuration: Externally adjustable.
- G. Shaft: Steel; comply with ASTM A29/A29M.
 - 1. Sleeve: Stainless steel, ASTM A743/A743M.
 - a. Configuration: Removable.
- H. Bearings: Roller.
 - 1. Application: Radial and thrust.
 - 2. Minimum L-10 Life: 100,000 hours at continuous maximum load and speed, according to ABMA 11.
- I. Seals: Single-cartridge type, balanced mechanical.
- J. Lubrication: Oil or grease.
- K. Fabrication:
 - 1. Pump and Drive Mating Surfaces: Machine finished.

2. Base:
 - a. Material: Heavy-duty cast-iron or fabricated structural steel.
 - b. Furnish drip rim and drain connection.

L. Operation:

1. Electrical Characteristics: As detailed and specified on the drawings.
2. Motors: As specified in Section 400593 "Common Motor Requirements for Process Equipment."
3. Control Panel: To be furnished by pump manufacturer.
4. Disconnect Switch: Factory mounted in control panel.

PART 3 - EXECUTION

3.1 INSTALLATION OF SCREW PUMPS

- A. Install pumps where indicated on Drawings and according to manufacturer instructions.
- B. Provide and connect piping, power and control conduit, and wiring to make system operational and ready for startup.
- C. Flush piping with clean water.

3.2 FIELD QUALITY CONTROL

- A. Preoperational Check: Before operating system or components, perform following:
 1. Check pump and motor alignment.
 2. Check for proper motor rotation.
 3. Check pump and drive units for proper lubrication.
- B. Startup and Performance Testing:
 1. Operate pump on clear water at design point for continuous period of two hours, under supervision of manufacturer's representative and in presence of Architect/Engineer.
- C. Verify pump performance by performing time-drawdown test or time-fill test.
- D. Check pump and motor for high bearing temperature and excessive vibration according to manufacturer instructions. Check for motor overload by taking ampere readings.
- E. Equipment Acceptance:

1. Adjust, repair, modify, or replace system components that fail to perform as specified and rerun tests.
2. Make final adjustments to equipment under direction of manufacturer's representative.

3.3 ATTACHEMENTS

A. Pump Schedule

1. RAS Pumps
 - a. Number Required: 2
 - b. Pumped Liquid: RAS
 - c. Design Capacity, each: 900/600/400 GPM.
 - d. TDH: 35/6/2 TDH
 - e. Minimum Motor Horsepower: 15 HP
 - f. VFD: Yes
 - g. Motor Speed: 1800 RPM.
 - h. Power Requirements: 460 volt, 3 phase, 60 Hz
 - i. Model: Hayward Gordon XCS5-B.
 - j. Discharge Size: 5 in"
 - k. Suction Size: 6 in"

END OF SECTION 432359

SECTION 464321 - CIRCULAR CLARIFIER EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Sludge Collector Assembly
2. Hercules™ Drive Assembly
3. Stationary Center Column.
4. Rotating Drive Cage
5. Scum Removal Assembly
6. Access Bridge
7. Influent Well.
8. Effluent Trough, weir and scum baffle.
9. Anchor Bolts and Fasteners.

1.2 DEFINITIONS

- A. FRP: Fiberglass-reinforced plastic.

1.3 REFERENCE STANDARDS

A. American Bearing Manufacturers Association:

1. ABMA 9 - Load Ratings and Fatigue Life for Ball Bearings.
2. ABMA 11 - Load Ratings and Fatigue Life for Roller Bearings.

B. American Gear Manufacturers Association:

1. AGMA 6001 - Design and Selection of Components for Enclosed Gear Drives.
2. AGMA 6013 - Standard for Industrial Enclosed Gear Drives.
3. AGMA 6034 - Practice for Enclosed Cylindrical Wormgear Speed Reducers and Gearmotors.
4. AGMA 6113 - Standard for Industrial Enclosed Gear Drives (Metric Edition).

C. American Society of Mechanical Engineers:

1. ASME B17.1 - Keys and Keyseats.
2. ASME B17.2 - Woodruff Keys and Keyseats.
3. ASME B29.100 - Double-Pitch Roller Chains, Attachments, and Sprockets.

D. ASTM International:

1. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
2. ASTM B209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.

1.4 PREINSTALLATION MEETINGS

- A. Section 013000 - Administrative Requirements: Requirements for preinstallation meeting.
- B. Convene minimum one week prior to commencing Work of this Section.

1.5 SUBMITTALS

- A. Section 013300 - Submittal Procedures: Requirements for submittals.
- B. Product Data: Submit manufacturer's Product Data for system materials and component equipment, including electrical characteristics.
- C. Shop Drawings:
 - 1. Indicate system materials and component equipment.
 - 2. Submit wiring and control diagrams, installation and anchoring requirements, fasteners, and other details.
- D. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.
 - 1. Certify that installation is completed according to manufacturer's instructions.
- E. Manufacturer's Instructions: Submit detailed instructions on installation requirements, including storage and handling procedures.
- F. Source Quality-Control Submittals: Indicate results of factory tests and inspections.
- G. Field Quality-Control Submittals: Indicate results of Contractor-furnished tests and inspections.
- H. Manufacturer Reports: Indicate that equipment has been installed according to manufacturer's instructions.

1.6 CLOSEOUT SUBMITTALS

- A. Section 017000 - Execution and Closeout Requirements: Requirements for closeout procedures.
- B. Project Record Documents: Record actual locations of installed clarifiers and components.
- C. Operation and Maintenance Data: Submit maintenance instructions for equipment and accessories.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Section 017000 - Execution and Closeout Requirements: Requirements for maintenance materials.

1.8 QUALITY ASSURANCE

- A. All work to be executed by mechanics skilled and experienced in the fabrication and erection of the type specified herein.
- B. Provide factory-trained manufacturer's representative to instruct constructor's personnel in the erection of the clarification equipment at the job site.
- C. Torque Test:
 - 1. Torque testing shall be performed before the mechanisms are approved and placed into operation. Verify structural integrity of the mechanism and drive. The test shall consist of:
 - a. Securing the sludge removal arms by cables to anchor bolts installed by the contractor in the tank floor at locations recommended by the manufacturer and approved by the engineer.
 - b. A torque load shall be applied to the truss arms by means of an anchored cable assembly. The magnitude of the load shall be measured by calibrating gauge reading and the distance of the line of action of each cylinder from the centerline of the mechanism. Readings shall be taken at 50%, 75% 100% and 140% of the continuous torque value.
 - c. Loads shall not be applied by turning on the motor.

1.9 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing products specified in this Section with minimum three years' experience.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Section 016000 - Product Requirements: Requirements for transporting, handling, storing, and protecting products.
- B. Inspection: Accept materials on-Site and inspect for damage.
- C. Store materials according to manufacturer's instructions.

1.11 EXISTING CONDITIONS

- A. Field Measurements:
 - 1. Verify field measurements prior to fabrication.
 - 2. Indicate field measurements on Shop Drawings.

1.12 WARRANTY

- A. Section 017000 - Execution and Closeout Requirements: Requirements for warranties.
- B. Furnish one year manufacturer's warranty for circular clarifier equipment and accessories.

PART 2 - PRODUCTS

2.1 CIRCULAR CLARIFIER EQUIPMENT

A. Manufacturers:

1. Envirodyne Systems Inc.
2. Or Approved Equal

B. Substitutions: As specified in Section 016000 - Product Requirements.

C. Description: Drive mechanism rotates sludge collector assembly, which moves settled primary sludge to collection hopper or collects settled secondary biosolids for recirculation.

1. Constructing one (1) 35'-0" diameter final clarifier in existing tank No.1.

D. Performance and Design Criteria:

1. Clarifier Mechanism:

- a. Continuous use under design load.
- b. No operating mechanisms below or in contact with liquid surface.

2. Torque ratings defined and specified below:

- a. Continuous Torque Rating: Normal operating torque of the entire mechanism. The entire mechanism shall be designed for continuous, non-interrupted operation at this torque rating for the service life at the peripheral velocity without excessive resultant wear 7,000 ft-lb.
- b. Motor Cutout Torque Rating: Torque rating at which the overload protection device is activated to de-energize the drive motor, 10,000 ft-lbs.
- c. Momentary Torque Rating: Torque rating which can momentarily developed due to starting, stalling, impact, or any other sudden buildup of torque in the entire mechanism, including the drive, 14,000 ft-lbs.

3. Scraper Arms Rotational Speed: Constant, 8 fpm.

4. Access Bridge Load: In addition to the dead load, support a live load of 50 lb per square foot with deflection limited to 1/360 of span.

5. Turntable Bearing Assembly: Arrange components for easy replacement of balls.

6. All submerged structural steel shall be ASTM A36 steel with minimum thickness of ¼ inch unless otherwise noted.

E. Sludge Collector Assembly:

1. Scraper Arms: Structural steel.
2. Quantity for each mechanism: Two (2)
3. Scraper Blades:
 - a. Material: Steel plate.
 - b. Minimum Thickness: ¼ inch.

- c. Provide squeegees, bolted to underside of scraper arms with 2 inches vertical adjustment.
- 4. Squeegees:
 - a. Material: 304 Stainless Steel
 - b. Adjustable 26 gauge.
- 5. Collection Well:
 - a. Material: ¼ inch steel.
 - b. Include two (2) stainless steel telescoping valves.
- 6. Sludge Riser Ducts:
 - a. Material: Steel Piping
 - b. Description: Piping designed to carry sludge from an attached transition box with entrance nozzle at the scraper blades to the sludge collection well.
- F. Hercules™ Drive Assembly:
 - 1. Description: Motor, speed reduction and turntable gearing, turntable bearing assembly, and drive assembly bearings.
 - 2. Equipped with a torque assembly with alarm and motor cutout microswitches in a NEMA 4X enclosure.
 - 3. Motor:
 - a. Adequate capacity to continuously drive the mechanism under conditions of momentary torque.
 - b. Not less than ½ hp.
 - c. Speed: 1800rpm.
 - d. Class B insulation
 - e. 3/60/230/460 V, 3 phase, 60 Hz.
 - 4. Speed Reduction and Turntable Gearing:
 - a. Comply with AGMA 6034 and AGMA 2001.
 - b. Primary Speed Reducers: Double Reduction Worm gearing.
 - c. Primary and secondary reducers shall be connected through a minimum ASA #80L- 1" pitch steel roller and chain sprockets. A 16 ga. SS guard shall enclose the chain and sprockets.
 - d. Intermediate Speed Reducers: Single Reduction Worm gearing.
 - e. Turntable: Pinion-and-spur-gear reduction unit
 - 1) AISI 4140 heat-treated alloy steel with 5.2" pitch diameter and 13 teeth.
 - f. Worm Gears: Cast Iron
 - g. Helical Gears: Cast alloy steel
 - h. Spur Gear:
 - 1) Adequately sized with a 32" pitch diameter and 80 teeth to match the pinion.
 - 2) Conform to AGMA 6.
 - i. Shaft Material: Steel.

- j. Gear Shafts and Bolting: Comply with AGMA 6001.
- k. Housings:
 - 1) Fully enclosed.
 - 2) Material: ATM A-36 steel.
 - 3) Provide dust and oil seals.
- 5. Drive Assembly Bearings:
 - a. Type: Ball; comply with ABMA 9.
 - b. Raceway: 37" diameter with deep induction hardening to Rockwell C60.
 - c. L-10 Life:
 - 1) Worm and Primary Helical Gearbox: 100,000 hours.
 - 2) Spur and Intermediate Helical Gearbox: 17,000 hours.
- 6. Lubrication:
 - a. Type: Oil.
 - b. Grease Fittings: Where not readily accessible, provide extension to accessible location.
- 7. Key-Mounted Connections: Comply with ASME B17.1.
- 8. Chain Drives and Belt Drives:
 - a. Chain:
 - 1) Type: Roller.
 - 2) Comply with ASME B29.100.
 - 3) Links: Steel.
 - b. Sprockets:
 - 1) Comply with ASME B29.100.
 - 2) Material: Steel.
 - c. Drive Guards:
 - 1) Material: Type 316 stainless steel.
 - 2) Occupational Safety and Health Administration (OSHA) approved.
- G. Stationary Center Column:
 - 1. The stationary center column shall be fabricated of minimum 1/4" thick reinforced A-36 steel plate and shall be 24" diameter. One end shall have a support flange for bolting to the anchor bolts with a similar flange at the top for supporting the Drive Mechanism. Suitable openings shall be provided in the column to allow unrestricted passage of flow into the influent well. An 6" diameter steel pipe shall be provided within the center column to transmit return sludge from the sludge collection box to the sludge draw-off

pipe at the tank floor. A flexible coupling shall be provided for connection to sludge draw-off pipe.

H. Rotating Drive Cage:

1. The rotating center cages shall be of 1/4" A-36 steel box truss construction, minimum 3'-0" square. The upper section of each cage shall be bolted to the drive mechanism and the lower section shall be provided with connections for two (2) sludge scraper arms. The drive mechanism shall rotate the cage with attached arms, influent well and sludge collection well.

I. Scum Removal Assembly:

1. Description: Skimmer assembly continuously moves surface scum to tank periphery and automatically flushes scum into scum trough.
2. Scum Box:
 - a. Material: A-36 steel.
 - b. Size: Match existing.
 - c. Minimum Thickness: 1/4 inch.
 - d. Attach to effluent trough with FRP brackets and stainless-steel bolts.
3. Skimmer Assembly:
 - a. Description: Rotating steel deflector blade fastened to and supported by the influent well.
 - b. Material: Steel
 - c. Minimum Thickness: 3/16 inch.
 - d. Hinged skimming blade with adjustable neoprene squeegees the width of the scum box.

J. Access Bridge:

1. Material: Constructed of two (2) steel beams and interlaces with structural angles or channels.
2. Minimum Walkway Width: 36 inches.
3. Minimum 6'-0" square center drive platform shall be 1/4 inch minimum aluminum checker plate.
4. Double Railing:
 - a. Material: Schedule 40 Aluminum.
 - b. 1-1/2 inch nominal pipe handrail and 4-1/4 inch toe plats.
 - c. Fasteners shall be Typer 304 Stainless Steel.

K. Influent Well:

1. Material: A-36 Steel
2. Minimum Thickness: 3/16 inch.
3. Diameter: 8 feet.
4. SWD: 5 feet.
5. Supported by drive cage.
6. Four (4) baffled scum ports.

- L. Effluent Trough, Weir and Scum Baffle:
 - 1. The existing effluent trough, weir & baffle shall be re-used & blasted according to Specifications Section 099700 – Special Coatings.
 - 2. Scum baffle support system including but not limited to steel plating, steel fasteners, steel brackets, and supports to be replaced with 316 Stainless Steel.
 - 3. Existing weir v-notches to be leveled.
- M. Anchor Bolts and Fasteners:
 - 1. Material: 304 Stainless Steel.
 - 2. If epoxy is required, this shall be furnished by the installing contractor.
- N. Operation:
 - 1. Control Panel:
 - a. Factory mounted.
 - b. NEMA 250 4X.
 - c. Single-point power connection and grounding lug.
 - 2. Controls:
 - a. Overload Protection: Indicate load on the mechanism continuously, annunciate an alarm if impending excessive load, and stop mechanism if excessive load reached.
 - b. Alarm: Audible horn or bell, relay, reset button, test circuit, and ON-OFF switch.
 - 3. Disconnect Switch: Factory-mounted in control panel.

2.2 SOURCE QUALITY CONTROL

- A. Section 014000 - Quality Requirements: Requirements for testing, inspection, and analysis.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Section 017000 - Execution and Closeout Requirements: Requirements for installation examination.
- B. Verify that clarifier basin is installed and ready to receive circular clarifier equipment.

3.2 INSTALLATION

- A. Install circular clarifier equipment according to manufacturer's instructions.
- B. Weir Plates: Mount weir plates against double bead of the sealant.

3.3 FIELD QUALITY CONTROL

- A. Section 017000 - Execution and Closeout Requirements: Requirements for testing, adjusting, and balancing.
- B. Dry Startup: Run equipment without liquid in basins and inspect for:
 - 1. Alignment of sprockets, chain, flights, and wearing surfaces.
 - 2. Binding and excessive heat buildup in drive units.
- C. Wet Startup: Run equipment with wastewater in basins and verify proper operation.
- D. Manufacturer Services: Furnish services of manufacturer's representative experienced in installation of products furnished under this Section for not less than 2 days on-Site for installation, inspection, field testing, and instructing Owner's personnel in maintenance of equipment.
- E. Equipment Acceptance:
 - 1. Adjust, repair, modify, or replace components failing to perform as specified, and rerun tests.
 - 2. Make final adjustments to equipment under direction of manufacturer's representative.
- F. Furnish installation certificate from equipment manufacturer's representative attesting equipment has been properly installed and is ready for startup and testing.

3.4 ADJUSTING

- A. Section 017000 - Execution and Closeout Requirements: Requirements for starting and adjusting.
- B. Check control module functions and adjust as necessary.

3.5 DEMONSTRATION

- A. Section 017000 - Execution and Closeout Requirements: Requirements for demonstration and training.
- B. Demonstrate equipment startup, shutdown, routine maintenance, and emergency repair procedures to Owner's personnel.

END OF SECTION 464321

SECTION 6
STANDARD SPECIFICATIONS

STANDARD SPECIFICATIONS

1. The "Construction and Material Specifications" of the State of Ohio Department of Transportation (ODOT), 2023 edition, current ODOT supplemental specifications, and current ODOT standard drawings shall govern work and materials which are not specified or modified herein or on the project Contract Drawings. All references to "the Department" shall be changed to "the Owner or his Representative." The project Contract Drawings and Specifications, in the event of a discrepancy, shall supersede the ODOT Specifications.

The absence of an "As Per Plan" designation on some item descriptions in the proposal for which there are clear and controlling plan notes, specifications, or other requirements does not relieve the Contractor of the responsibility to read, bid and construct those particular items in accordance with the governing plan notes, specifications, or other requirements and the Contractor shall have no basis of claim based upon an "order of precedence".

ODOT 104.02 D., 611.04, 611.12, and 611.13 shall not apply to this project.

SECTION 7
SPECIFIC PROJECT REQUIREMENTS

SPECIFIC PROJECT REQUIREMENTS

1 - CONTACT DURING BIDDING

- 1.1 All questions during bidding should be addressed to Maggie Boru, Staff Engineer II at Verdantas LLC, 8150 Sterling Court, Mentor, OH 44060 by email at mboru@verdantas.com

2 - CORRECTION PERIOD

- 2.1 The Correction Period in Section 13.07 of the General Conditions shall be changed from a one (1) year to a two (2) year period.

3 - INSURANCE

- 3.1 Section SC-5.04(D) of the Supplementary Conditions shall be deleted and no "all risk builders risk" or "installation floater" insurance need be purchased by the Contractor.
- 3.2 See the following Bid Set Sections for Insurance Requirements:
- A. Section 1, Instructions to Bidders, Part 10 Insurance
 - B. Section 3, General Conditions, Article 5 Bonds and Insurance (EJCDC) or Article 11 Insurance and Bonds (AIA), whichever is used in the Bid Set
 - C. Section 4, Supplemental Conditions

4 - WORKING HOURS

- 4.1 No work shall be performed between the hours of 7:30 p.m. and 7:30 a.m. nor on Saturday, Sunday, or legal Holidays, without written permission of the Owner.

5 - PROJECT COMPLETION

- 5.1 All work including restoration and clean-up shall be completed no later than the contract completion date. Failure to complete all work within the allotted time will result in assessment of liquidated damages. Upon completion of all work and written notification of same by the Contractor, the Engineer and Owner will compile a punch list. The punch list will be sent to the Contractor. All punch list work shall be completed to the satisfaction of the Engineer and the Owner within 14 days after receipt of the punch list. Failure to complete the punch list work within the allotted time will result in assessment of liquidated damages.

6 - SUBSTANCE USE PREVENTION AND RECOVERY (SUPR) PROGRAM

- 6.1 Formerly known as the Drug-Free Safety Program, is BWC's voluntary safety program developed to address workplace use and misuse of alcohol and other drugs. During the life of this project, the Contractor and all its Subcontractors that provide labor on the Project site must be enrolled in and remain in good standing in the Ohio Bureau of Worker's Compensation ("OBWC") Substance Use Prevention and Recovery (SUPR) or a comparable program approved by the OBWC.

7 - OHIO ETHICS LAW

- 7.1 Contractor agrees that it is currently in compliance and will continue to adhere to the requirements of Ohio Ethics law as provided by Section 102.03 and 102.04 of the Ohio Revised Code.

8 - PERIODIC PAYMENTS

- 8.1 This project is expected to be funded in whole or in part by the Ohio EPA WPCLF & OPWC Programs. The Contractor shall comply with all requirements of this program. The periodic payments to the Contractor may be made in whole or in part through the OWNER and/or OWDA & OPWC. In paragraph 14.02 C.1. of the General Conditions, change “ten days” to “sixty days.”
- 8.2 Ohio EPA must approve all change orders prior to a change order item being paid on a pay estimate.

END OF SECTION

SECTION 8
SPECIAL REQUIREMENTS - EPA

Contract Document Provisions

- The following contract requirements and forms are to be included in the construction contract documents. Completed copies of the forms are to be submitted to Ohio EPA within one week after bids are received, or sooner, dependent on your individual project schedule. Bid packages for WPCLF projects should be submitted to DEFA in the central office while bid packages for WSRLA projects should be submitted to the appropriate DDAGW district office.

Equal Employment Opportunity (EEO) Requirements

The Contractor's EEO Certification Form must be (1) included in the contract documents and (2) referenced in the Instructions to Bidders, informing bidders that the form must be completed and submitted with their bid.

NOTE: If the loan applicant has its own EEO requirements, local procedures and forms may be substituted for the EPA form.

Debarment

The Certification Regarding Debarment, Suspension, and Other Responsibility Matters must be (1) included in the contract documents and (2) referenced in the Instructions to Bidders, informing bidders that the form must be completed and submitted with their bid.

Disadvantaged Business Enterprises (DBE) Utilization

The DBE Specification language and instructions to the bidders and Forms 6100-3, 6100-4 and 6100-2 must be (1) included in the contract documents and (2) referenced in the Instructions to Bidders, informing bidders that the forms must be completed and submitted with their bid.

NOTE: If the loan applicant has its own DBE requirements or if other funding programs with potentially competing DBE requirements are participating in the project funding, please contact Ohio EPA – DEFA for specific instructions regarding the DBE requirements.

Davis-Bacon wage rate requirements

The contract documents must include language that requires contractors and subcontractors to pay wages at rates not less than those prevailing on similar projects within the area as determined by the US Secretary of Labor. In addition, the loan recipient will be required to conduct wage interviews and monitor payroll for compliance.

Build America, Buy America (Lead Service Line, Emerging Contaminant, Equivalency Projects)

Build America Buy America Act (BABA) requirements apply to Lead Service Line, Emerging Contaminants and equivalency projects funded by a WPCLF assistance agreement and/or a WSRLA assistance agreement. Equivalency projects are those receiving funding from federal capitalization grants that support the WPCLF and WSRLA programs. The acknowledgement form must be included in the contract documents. The acknowledgement form should be signed by the contractor and submitted with the final bid package. It is recommended that the BABA guidance document and questions and answers document be included in the contract documents.

BABA Does Not Apply for this Project

American Iron and Steel

All treatment works projects funded by a WPCLF assistance agreement and all public water system projects funded by a WSRLA assistance agreement are required to comply with American Iron and Steel (AIS) requirements. The acknowledgement form must be included in the contract documents. The acknowledgement form should be signed by the contractor and submitted with the final bid package. It is recommended that the AIS guidance document and questions and answers document be included in the contract documents.

- The following contract requirements are to be included in the construction contract documents but are not required to be submitted to Ohio EPA for contract endorsement.

Violating Facilities Clause

Language prohibiting this use of equipment or services from anyone on the EPA List of Violating Facilities must be included in the contract documents.

Small Businesses in Rural Areas (SBRA)

Language encouraging the participation of small businesses in rural areas should be included in the contract documents.

Prohibition on Telecommunications and Video Surveillance

Restrictions to loan recipients and subrecipients on certain telecommunications and video surveillance services or equipment due to Public Law 115-232.

Insurance Provisions

Section 3.5 of the WPCLF/WSRLA Loan Agreement contains specific requirements regarding insurance for all contractors and all subcontractors for the life of the contract. These insurance requirements must be reflected in the contract documents. Adjust the language as needed to meet the specifics of the construction project while still meeting the provisions of the Loan Agreement.

Materials Testing

In addition to the details included with specific equipment testing in the specifications, there should be an overall statement regarding testing for the project. Adjust the language as needed to meet the specifics of the construction project.

Continuous Treatment Provisions

It is important that construction activities not result in any temporary violations of Drinking Water or NPDES permit requirements (for permitted facilities). Construction activities should interrupt wastewater service to the individual resident as little as possible. For drinking water projects, it is important that construction activities not result in any disruption of service. The example language is intended for construction work occurring at an existing drinking water plant or a WWTP and must be adjusted to meet the specifics of the construction project.

WPCLF/WSRLA Change Order Form

All change orders for the construction project must be executed on the WPCLF/WSRLA change order form. The form must be (1) included in the contract documents and (2) the instructions referenced in the Contract Documents.

- The following contract requirements are provided in Ohio Revised Code (ORC). Some loan applicants have local requirements that supersede ORC provisions for competitive bidding, and these local requirements can be applied instead of ORC, except for those requirements specified in the WPCLF/WSRLA loan agreements.

Bid Guarantee

The requirements for a bid guarantee (which can be a bond or a certified check, cashier's check, or letter of credit) are covered in ORC 153.54.

Payment and Performance Bonds

The requirements for a Payment and Performance Bond are covered in ORC 153.54 and Section 3.4 of the WPCLF/WSRLA Loan Agreements.

Payment Retention

The requirement for payment retainage is provided in ORC 153.12. Details on how the escrow account that holds the retainage are provided in ORC 153.13. Further details on how and when to pay for materials delivered and installed are provided in ORC 153.14.

Completion Time

The contract documents must state the length of the contract time per ORC 153.19. The dates for Initiation of Operation and Project Completion are specified in the WPCLF/WSRLA Loan Agreements and need to coincide with the specified contract time.

- The following are contract provisions to consider but are not required. The language provided for each are samples only and must be adjusted to reflect the specifics of the project and local needs.

Local Protest Procedure

Some statement as to when a valid protest must be filed, in what form it must be filed and who it must be filed with should be included. ORC 153.12 has some default procedures for handling disputes. If the owner wants more control than provided in ORC, a procedure needs to be spelled out in the Contract Documents.

[Basis and Method for Award](#)

The contract documents should include some language that clearly states what the Owner will consider when determining the successful bidder and to provide a clear basis for the Owner when they have a need to reject the low bidder and go with a different bidder.

[Payment Methods](#)

To minimize uncertainty and arguments that can slow down the progress of construction it is useful to provide language stating how and when the Contractor will get paid. In addition to ORC and other local requirements, the involvement of public funding Agencies such as the WPCLF, WSRLA, Ohio Public Works Commission and Community Development Block Grant impact the process and timing for payments.

Contract Documents Review (pre-advertising)

Whenever possible, all the provisions listed above must be included in the contract documents for the project prior to advertisement for bids. Ohio EPA's review for these contract provisions will occur as part of our normal detail plans and specifications review. The bidding documents are to be submitted to Ohio EPA for review regardless of whether a Permit to Install or a Plan Approval is required for the project.

After bidding has started:

In those cases when WPCLF or WSRLA funding is being requested after advertisement for bids has started, add all missing contract provisions, forms, and requirements via addendum.

After bids have been opened but before contracts have been signed:

If the bid advertisement period is over and bids have been opened, but the construction contract have not been signed yet, provide a draft contract change order which would be used to incorporate all missing contract provisions, forms, and requirements into the contract. This should be done in consultation with local legal counsel to address any potential bid protest concerns.

Construction contracts have already been signed:

If the construction contract has already been signed, a contract change order must be executed incorporating all missing contract provisions, forms, and requirements into the contract.

A [Contract Documents Review checklist](#) is provided here to help ensure that all requirements are included and to help expedite Ohio EPA's review of your documents.

Bid Package Submittals (post-advertising)

Certain documents must be submitted to Ohio EPA within one week after bids are received, or sooner dependent on your individual project schedule. Please [look here for a complete list](#) of the required submittals.

Disadvantaged Business Enterprises (DBE) Utilization

(Required Contract Provision)

USEPA has a program to encourage the participation of disadvantaged businesses in the construction activities funded by the Clean Water and Drinking Water SRF's. "DBE" is an all-inclusive term that includes Minority Business Enterprises (MBE), Women Business Enterprises (WBE), Small Business Enterprises (SBE), Small Business in Rural Areas (SBRA), HUBZone Small Business, Labor Surplus Area Firms (LSAF), and other entities defined as socially and/or economically disadvantaged. While the WPCLF and WSRLA strongly encourage participation by all disadvantaged groups, specific participation goals are negotiated with USEPA only for Minority Business Enterprises and Women's Business Enterprises.

Goals

As a condition of receiving capitalization grants from U.S. EPA for the Water Pollution Control Loan Fund (WPCLF) and the Water Supply Revolving Loan Account (WSRLA), the Ohio EPA negotiates "fair share" Disadvantaged Business Enterprises (DBE) objectives with U.S. EPA. **The current negotiated goal for construction related activities is 5.4% (the total goal is based on 3.1% of MBEs and 2.3% of WBEs participation).** Recently, the USEPA issued a class exemption on some Disadvantaged Business Enterprise (DBE) requirements: <https://www.epa.gov/grants/rain-2025-g02>. While the exemption removes reporting and recordkeeping requirements it does not eliminate the good faith effort (GFE) requirement. As noted in this exemption, "Nothing in this class exception and waiver affects EPA's statutory obligations or agency and recipient obligations under [2 CFR Part 200](#), Uniform Administrative Requirements, Cost Principles, and Audit Requirements for Federal Awards, including the considerations ("GFE") listed in [2 CFR 200.321](#) when procuring goods and services under the EPA award." Based on the language of the exemption, the current DBE goal for Ohio EPA State Revolving Funds (SRFs) are still in place and a GFE is mandatory for all loan recipients that do not meet the DBE goal.

DBE Certification

Under the DBE program, qualified DBE's are those that have been certified as an MBE or WBE. Certifications can be obtained from a federal agency such as the Small Business Administration or the Department of Transportation or by an approved State agency. The Unified Certification Program (UCP) administered by the Ohio Department of Transportation (ODOT) can provide the necessary DBE certifications. Information on the UCP can be found at www.ohioucp.org as well as the ODOT website <https://www.transportation.ohio.gov/programs/business-economic-opportunity/dbe>. The Department of Development operates the Encouraging Diversity Growth and Equity Program (EDGE), the other state approved DBE certification program. Information on EDGE can be found at <https://development.ohio.gov/business/minority-business/business-certifications/encouraging-diversity-growth-and-equity-program>.

On September 30, 2025, USDOT issued an interim final ruling in regard to the DBE program. Changes to the DBE guidelines have affected the ODOT certification program, but it does not affect the requirement for SRFs to meet the GFE for DBE participation.

All previously certified DBEs through the ODOT DBE program are no longer effective and all DBEs will need to resubmit for certification that follows the new guidelines. DAS EDGE is unaffected by this change and can be used as part of the SRF requirements towards meeting the DBE goals of 5.4% of each loan. Because the ODOT

program currently does not include any certified DBEs, Ohio EPA will accept any certified DBEs through non-SR.EPA.5

approved certification programs that follow the ODOT program 51% ownership requirement as part of a GFE to meet the DBE goals.

DBE Qualifications

To qualify for MBE certification, businesses must be 51 percent owned and controlled by a U.S. citizen and Ohio resident belonging to an African American, Native American, Hispanic, or Asian American ethnic group. In addition, the business must be in operation for at least one year prior to submitting an application. For DBE status, a business must be at least 51 percent owned by a socially and economically disadvantaged person who participates in the daily operations of the business. This person must be a woman or of African-American, Hispanic, Native American, Asian American ethnicity.

Program Requirements

To comply with DBE program requirements the WPCLF/WSRLA loan recipient must do the following:

1. Create and maintain a bidder's list (see description below)
2. Include contract conditions applicable to the DBE program in all procurement contracts entered into by the Borrower for all WPCLF and WSRLA projects. These conditions are listed below.
3. Follow, document, and maintain documentation of good faith efforts on the part of prime contractors to ensure that Disadvantaged Business Enterprises (DBEs) have the opportunity to participate in the project.
4. Review the Form 6100-3 and 6100-4 submittals provided by bidders on the project for completeness and obtain any additional information necessary to verify the certification status of all proposed subcontractors.
5. Obtain documentation of the good faith efforts of the prime contractor if the prime contractor does not meet the MBE or WBE goal.
6. Obtain a written confirmation from any prime contractor states that they will not meet the MBE and WBE goals because they will not be entering into any agreements for goods or services with any company, firm, joint venture, or individual.
7. Submit the following to the Ohio EPA/DEFA as part of the bid package upon which the WPCLF/WSRLA loan amount is determined:
 - Form 6100-3 from each subcontractor
 - Form 6100-4 from each prime contractor
 - A copy of the Good Faith Efforts documentation from any prime contractors that will not meet the MBE and WBE goals,
 - If any of the prime contractors will not meet the MBE and WBE goals because they will not be entering into any agreements for goods or services with any company, firm, joint venture, or individual, a copy of the written confirmation from that prime contractor

NOTE: It is up to the WPCLF/WSRLA loan recipient whether or not to require completion and submission of Forms 6100-3 and 6100-4 from all bidders with the bid proposal or to accept completion and submission from the successful bidder(s) only at some time after bids are received. Regardless of whether the forms are completed and submitted with the bids or at some later time once the successful bidders are identified, completed forms are to be submitted to Ohio EPA with bid package.

To comply with DBE program requirements all prime contractors must do the following:

1. Follow, document, and maintain documentation of their good faith efforts.
2. Complete and submit **Form 6100-4 DBE Subcontractor Utilization Summary** as part of the bid proposal package to the loan recipient.
3. Have its Disadvantaged Business Enterprise subcontractors complete **Form 6100-3 DBE Subcontractor Proposed Performance Form** and submit those as part of the bid proposal package to the loan recipient.
4. Provide **Form 6100-2 DBE Subcontractor Actual Participation Form** to all of its Disadvantaged Business Enterprise subcontractors for completion at the end of the work.

Bidders List

The Borrower must create, maintain, and use a bidders list for purposes of soliciting both MBE/WBEs and non-MBE/WBEs during procurement of construction, equipment, supplies, and services. This list shall include:

1. Entity's name with point of contact;
2. Entity's mailing address, telephone number, and e-mail address;
3. The procurement on which the entity bid or quoted, and when; and
4. Entity's status as an MBE/WBE or non-MBE/WBE.

Borrowers that receive less than \$250,000 or less in any one fiscal year can be exempt from maintaining a Bidders List.

The Bidders List shall be maintained until the project period has expired and the Borrower is no longer receiving EPA funding. The Bidders List must include all firms that bid on the prime contracts, or bid or gave a quote on subcontracts, including both MBE/WBEs and non-MBE/WBEs.

Required Contract Conditions

The DBE Specification language and instructions to the bidders and Forms 6100-2, 6100-3 and 6100-4 must be included in the contract documents and referenced in the Instructions to Bidders, informing bidders that the forms must be completed and submitted with their bid for all WPCLF and WSRLA projects:

1. The prime contractor must pay its subcontractor for satisfactory performance no more than 30 days from the prime contractor's receipt of payment from the owner.
2. The prime contractor must notify the owner in writing prior to the termination of any Disadvantage Business Enterprise subcontractor for convenience by the prime contractor.
3. If a Disadvantage Business Enterprise contractor fails to complete work under the subcontract for any reason, the prime contractor must employ the six Good Faith Efforts (listed below) if soliciting a replacement contractor.
4. The prime contractor must employ the six Good Faith Efforts even if the prime contractor has achieved its fair share objectives.
5. An owner must ensure that each procurement contract it awards contains the following terms and conditions:

The contractor shall not discriminate on the basis of race, color, national origin or sex in the performance of this contract. The contractor shall carry out applicable requirements of 40 CFR Part 33 in the award and administration of contracts awarded under EPA financial assistance agreements. Failure by the contractor to carry out these requirements is a material breach of this contract which may result in the termination of this contract or other legally available remedies.

Good Faith Efforts

Borrowers and their prime contractors must follow, document, and maintain documentation of their good faith efforts as listed below to ensure that Disadvantaged Business Enterprises (DBEs) have the opportunity to participate in the project by increasing DBE awareness of procurement efforts and outreach.

1. Ensure DBEs are made aware of contracting opportunities to the fullest extent practicable through outreach and recruitment activities; including DBEs on solicitation lists and soliciting them whenever they are potential sources.
2. Make information on forthcoming opportunities available to DBEs and arrange time frames for contracts and establish delivery schedules, where the requirements permit, in a way that encourages and facilitates participation by DBEs in the competitive process. This includes, whenever possible, posting solicitation for bids or proposals for a minimum of 30 calendar days before the bid or proposal closing date.
3. Consider in the contracting process whether firms competing for large contracts could be subcontracted with DBEs. This will include dividing total requirements when economically feasible into smaller tasks or quantities to permit participation by DBEs in the competitive process.
4. Encourage contracting with a consortium of DBEs when a contract is too large for one of these firms to handle individually.
5. Use the services and assistance of the Small Business Administration and the Minority Business Development Agency of the U.S. Department of Commerce.
6. If the prime contractor awards subcontracts, require the prime contractor to take the steps in numbers 1 through 5 above.

DBE Forms

Form 6100-3 – Each prime contractor must have its DBE subcontractors complete **Form 6100-3 DBE Subcontractor Proposed Performance Form**. This form gives the DBE subcontractor the opportunity to report the scope and cost of the subcontract and it should be forwarded to the Prime Contractor along with the DBE's quote. Each subcontractor completes one Form 6100-3. The Borrower must submit all Form 6100-3 forms to the Ohio EPA/DEFA as part of the bid package upon which the WPCLF/WSRLA loan amount is determined.

Form 6100-4 – Each prime contractor must complete and submit **Form 6100-4 DBE Subcontractor Utilization Summary** as part of the prime contractor's bid proposal package to the Borrower. This form summarizes the Prime Contractor's intended use of identified DBE(s) and the estimated dollar amount of each subcontract. Only one Form 6100-4 form is required from each Prime Contractor. The Borrower must submit this form to the Ohio EPA/DEFA as part of the bid package upon which the WPCLF/WSRLA loan amount is determined.

Violating Facilities Clause

ViolatingFacilities:

The Contractor agrees to comply with all applicable standards, orders or requirements under Section 306 of the Clean Air Act, 42 USC 1857 (h), Section 508 of the Clean Water Act, 33 USC 1368, Executive Order 11738, and EPA regulations, 40 CFR Part 32, which prohibits the use under non-exempt Federal contracts, grants, or loans of facilities included on the EPA List of Violating Facilities.

Requirement For Utilization Of Small Businesses In Rural Areas (SBRA)

This procurement is subject to the EPA policy of encouraging the participation of small businesses in rural areas. It is EPA policy that recipients of EPA financial assistance awards utilize the services of small businesses in rural areas (SBRAs), to the maximum extent practicable. The objective is to assure that such small business entities are afforded the maximum practicable opportunity to participate as subcontractors, suppliers and otherwise in EPA-awarded financial assistance programs. This policy applies to all contracts and subcontracts for supplies, construction, and services under EPA grants or cooperative agreements. Small purchases are also subject to this policy.

This procurement is subject to the EPA policy of encouraging the participation of small business in rural areas (SBRAs).

Local Protest Procedure

Protests

A protest based upon an alleged violation of the procurement requirement may be filed against the OWNER's procurement action by a party with an adversely affected direct financial interest. The protest shall be filed with the Mayor. The OWNER shall determine the protest. The OWNER may request additional information or a hearing in order to resolve the protest.

A protest shall be filed as early as possible during the procurement process, but must be received by the OWNER no later than one week after the basis of the protest is known or should have been known, whichever is earlier. If the protest is mailed, the protester bears the risk of nondelivery within the required time period.

A protest must clearly present the procurement requirement being protested, the facts which support the protest, and any other information necessary to support the protest.

Continuous Treatment Provisions

It is important that construction activities not result in any temporary violations of NPDES permit requirements (for permitted facilities) and construction activities should interrupt wastewater service to the individual resident as little as possible. For drinking water projects, it is important that construction activities not result in any disruption of service. Any disruption of service must be immediately reported to the Ohio EPA, Drinking Water Section of the appropriate district office.

Continuous Treatment (wastewater projects)

Federal regulations prohibit by-passing of any sewage during construction operations. The Contractor will be responsible for providing any required temporary pumping facilities piping, etc., necessary to complete the project without any plant by-passing and continuous treatment must be provided at the same level during construction as existed prior to construction.

Unless otherwise previously or subsequently specified, the Contractor shall procure and pay for all permits, licenses, and approvals necessary for the execution of his Contract.

The Contractor shall comply with all laws, ordinances, rules, orders, and regulations relating to the performance of the work required to complete their Contract.

Continuous Treatment (drinking water projects)

The Contractor will be responsible for obtaining approval from Ohio EPA for use of temporary pumping facilities, piping and other items in order to complete the project without any plant by-passing. Continuous treatment must be provided at the same level during construction as existed prior to construction.

Unless otherwise previously or subsequently specified, the Contractor shall procure and pay for all permits, licenses, and approvals necessary for the execution of his Contract.

The Contractor shall comply with all laws, ordinances, rules, orders, and regulations relating to the performance of the work required to complete their Contract.

WPCLF/WSRLA Payments

This project is funded in whole or in part by funds from the Water Pollution Control Loan Fund (WPCLF) or the Water Supply Revolving Loan Account (WSRLA) as administered by the Ohio EPA-DEFA and the Ohio Water Development Authority (OWDA). The Contractor shall comply with all requirements of these programs. The Owner shall be responsible for the progress payments to the Contractor if the Owner becomes ineligible for further payments due to circumstances which are of no fault of the Contractor. The monthly payments to vendors may be made through the Owner, the OWDA, or both as deemed by the Owner.

The time frame for payment of pay estimates by the Owner and/or Special Funding Agency(s) may be up to 60 calendar days from date of receipt of pay estimate from Engineer to Owner. Ohio EPA/DEFA must approve all change orders before the change order may be submitted for payment on a pay estimate.

State of Ohio
WATER POLLUTION CONTROL LOAN FUND (WPCLF) /
WATER SUPPLY REVOLVING LOAN ACCOUNT (WSRLA)

CONTRACT CHANGE ORDER

RECIPIENT _____ CHANGE ORDER NBR _____
LOAN NUMBER _____ CONTRACT _____
OWDA PROJECT No. _____ DATE _____
Description of Change: _____

The time provided for completion in the contract for the above items is (increased/decreased) by ____ calendar days.

RECOMMENDED BY: _____ DATE: _____
(Engineer)
APPROVED BY: _____ DATE: _____
(Recipient)
ACCEPTED BY: _____ DATE: _____
(Contractor)

(Company)

		OWDA APPROVAL
Original Contract Amt		The above proposal is hereby accepted and I recommend that it be approved and made a part of the contract noted above. The approval does not constitute an increase in the total loan amount, but represents approval for the work.
Previous Changes (+ / --)		
This Change (+ / --)		
Adjusted Contract Amt		
Ohio EPA Acceptance		Chief Engineer
Date		Date

CHANGE ORDER INSTRUCTIONS:

All Change Orders for this work, regardless of costs and whether Water Pollution Control Loan Fund (WPCLF) or Water Supply Revolving Loan Account (WSRLA) funding will be used to finance the changes, must be submitted to Ohio EPA for review.

Changes Requiring Prior Approval

Any change which substantially modifies the Project Facilities as specified in the Ohio EPA approved Facilities Plan and Final Permit to Install or Final Plan Approval (when applicable) or alters the direct or indirect impact of the Project Facilities upon the environment must be incorporated into a Change Order. One copy of the Change Order prior to execution is to be submitted to Ohio EPA for review and prior approval of the acceptability of the change. "Prior to execution" means before the Change Order is signed by the Owner.

Ohio EPA will review the Change Order and inform the Owner of the technical, environmental and operational acceptability of the change, and give the Owner permission to proceed with the proposed work.

All Other Changes

Change Orders not requiring prior approval as described above must be submitted to Ohio EPA within one (1) month of the time at which they are approved by the Owner. All change orders must be submitted electronically to dedicated change order email addresses for WPCLF and WSRLA projects.

Change Order Approval Process

After the Change Order is executed, one (1) copy of the Change Order, including the supporting documentation, is to be sent electronically to Ohio EPA for final review.

The dedicated e-mail address for the electronic submittal of WPCLF Change Orders is EPAWPCLFCO@epa.ohio.gov.

The dedicated e-mail address for the electronic submittal of WSRLA Change Orders is EPAWSRLACO@epa.ohio.gov.

After the Change Order is accepted and eligible costs determined, Ohio EPA will issue a letter informing the Owner and authorizing OWDA to disburse funds from Project Contingency for the work. The OEPA letter will be sent electronically along with a PDF of the WPCLF/WSRLA Change Order form which will be signed by all parties including Ohio EPA and OWDA.

Payments for Change Order Work

The Owner is precluded from submitting to the OWDA payment requests for Eligible Project Costs associated with the Change Orders until such time as the Ohio EPA's approval of the Change Orders has been obtained.



November 3, 2022

MEMORANDUM

BABA Does Not Apply for this Project

SUBJECT: Build America, Buy America Act Implementation Procedures for EPA Office of Water Federal Financial Assistance Programs

FROM: Radhika Fox
Assistant Administrator 

TO: EPA Regional Water Division Directors, Regions I – X
EPA Office of Water Office Directors

OVERVIEW

The Biden-Harris Administration recognized the Nation's critical need for infrastructure investment, championing the Bipartisan Infrastructure Law (BIL), which Congress passed on November 15, 2021 (also known as the Infrastructure Investment and Jobs Act (IIJA)). The BIL will provide an unprecedented level of federal investment in water and wastewater infrastructure in communities across America.

In Title IX of the IIJA, Congress passed the Build America, Buy America (BABA) Act, which establishes strong and permanent domestic sourcing requirements across all Federal financial assistance programs for infrastructure. The U.S. Environmental Protection Agency (EPA) Office of Water is honored to help lead the implementation of these provisions and is proud of its near decade of successful implementation of the American Iron and Steel (AIS) provisions for its flagship water infrastructure programs.

This is a transformational opportunity to build a resilient supply chain and manufacturing base for critical products here in the United States that will spur investment in good-paying American manufacturing jobs and businesses. EPA's efforts to implement BABA will help cultivate the domestic manufacturing base for a wide range of products commonly used across the water sector but not currently made domestically. This will take time, and flexibility will be important to ensure that EPA can leverage critical water investments on time and on budget to protect public health and improve water quality.

IMPLEMENTATION

Recognizing the opportunity and need for BABA implementation guidance, the Made in America Office (MIAO) of the Office of Management and Budget (OMB) published [Initial Implementation Guidance on Application of Buy America Preference in Federal Financial Assistance Programs for Infrastructure](#) (OMB Guidance M-22-11) on April 18, 2022. The guidance provides government-wide implementation direction for all Federal financial assistance programs for infrastructure. Despite the extensive guidance developed by MIAO, EPA's Office of Water infrastructure investment programs have received many questions that were not addressed in OMB Guidance M-22-11 or that require further clarification for EPA water infrastructure programs. The following questions and answers serve to supplement OMB Guidance M-22-11 with implementation procedures specific to EPA's relevant water infrastructure programs.

Section 70914(a) of the IIJA states when a Buy America preference under BABA applies: "Not later than... [May 14, 2022], the head of each Federal agency shall ensure that none of the funds made available for a Federal financial assistance program for infrastructure...may be obligated for a project unless all of the iron, steel, manufactured products, and construction materials used in the project are produced in the United States." Therefore, Federal financial infrastructure investments obligated on or after May 14, 2022, must comply with the BABA requirements. Absent a waiver, all iron, steel, manufactured products, and construction materials permanently incorporated into an infrastructure project subject to the BABA requirements must be produced in the United States. For many of EPA's Office of Water infrastructure investment programs, the vast majority of products permanently incorporated into construction, maintenance, or repair projects must comply with the BABA requirements, with the exception of select construction materials (cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives), which are specifically excepted by the BABA statute.

EPA's Office of Water implements many infrastructure investment programs subject to BABA requirements, including the following:

- Alaska Native Villages and Rural Communities Water Grant Program (ANV) (and any associated Interagency Agreements with the Indian Health Service)
- Clean Water and Drinking Water State Revolving Fund Programs (CW and DWSRF)
- Clean Water and Drinking Water Grants to U.S. Territories and the District of Columbia
- Clean Water Indian and Drinking Water Tribal Infrastructure Grant Set-aside (and any associated Interagency Agreements with the Indian Health Service)
- Coastal Wetlands Planning, Protection and Restoration Act, (CWPPRA) Programs
- Congressionally Directed Spending/Community Project Funding (also known as Community Grants)
- Geographic Programs¹
- Gulf Hypoxia Program
- National Estuaries Program (CWA Section 320)

¹ Geographic Programs include: Great Lakes Restoration Initiative, Chesapeake Bay, San Francisco Bay, Puget Sound, Long Island Sound, Gulf of Mexico, South Florida, Lake Champlain, Lake Pontchartrain, Southern New England Estuaries, Columbia River Basin, Pacific Northwest

- 319 Nonpoint Source Management Program Implementation
- Reducing Lead in Drinking Water Grant Program (SDWA §1459B)
- Assistance for Small and Disadvantaged Communities Grants: Small, Underserved, and Disadvantaged Community Grant Program (SUDC), Emerging Contaminants in Small or Disadvantaged Communities (EC-SDC) and Drinking Water Infrastructure Resilience & Sustainability (SDWA §1459A)
- Sewer Overflow and Stormwater Reuse Municipal Grants (OSG)
- USMCA Implementing Legislation (Section 821 and Title IX, USMCA Supplemental Appropriations, 2020)
- U.S.-Mexico Border Water Infrastructure Program
- Voluntary School and Child Care Program Lead Testing and Remediation Grant Program (SDWA 1464(d))
- Water Infrastructure Finance and Innovation Act (WIFIA)

The questions and answers in this document apply to the implementation of BABA requirements for the Office of Water infrastructure programs listed above unless superseded by regulation, statute, or other applicable guidance. For many of the programs listed above which did not have domestic preference requirements prior to BABA, additional implementation details are pending or may be developed after the issuance of these procedures. In addition, EPA notes that more direction will be helpful to inform the determination and definition of domestic content in manufactured goods. Supplemental guidance on these and other issues, from either OMB or EPA, may be forthcoming. These implementation procedures may also apply to additional, unlisted EPA programs which may be required to apply BABA subsequent to publication of this memorandum (e.g., future funding programs which have been authorized, but not yet appropriated).

For more information on the BABA requirements, visit the EPA Office of Water’s dedicated website – <https://www.epa.gov/cwsrf/build-america-buy-america-baba> – or contact your funding authority (such as your grants officer, portfolio manager, or state contact). For information on approved waivers, visit <https://www.epa.gov/cwsrf/build-america-buy-america-baba-approved-waivers>. You may also email questions to BABA-OW@epa.gov.

This Implementation Procedures document is organized to provide responses to questions in the following topic areas:

- Section 1: General 4
- Section 2: Product Coverage 5
- Section 3: Co-funding 9
- Section 4: Waivers 10
- Section 5: Documenting Compliance 12
- Section 6: Programs with American Iron and Steel Requirements 16
- Section 7: Program-Specific Issues 17
- Appendix 1: Example Build America, Buy America (BABA) Act Construction Contract Language 22
- Appendix 2: Example Build America, Buy America (BABA) Act Assistance Agreement Language 23

QUESTIONS AND ANSWERS

SECTION 1: GENERAL

- Q1.1: Will EPA provide documentation for BABA for bid solicitations and suggested contract language? Will EPA provide suggested language for Assistance Agreements?
 - A1.1: See Appendix 1, which includes suggested language for construction contracts which addresses the BABA requirements. In addition to the language suggested in Appendix 1, EPA also recommends that assistance recipients prepare contract bid solicitation documents with a statement for the consulting engineers and construction firms as follows: “By signing payment application and recommending payment, Contractor certifies they have reviewed documentation for all products and materials submitted for payment, and the certifications are sufficient to demonstrate compliance with Build America, Buy America Act requirements.” In most cases, the assistance recipient’s representatives assume the responsibility for their clients to conduct due diligence on compliance with applicable domestic preference requirements.

All Federal Financial infrastructure assistance agreements subject to BABA must have a clause requiring compliance with the requirements. See Appendix 2 for example assistance agreement language.
- Q1.2: Would federally-financed infrastructure projects outside of the United States need to comply with the BABA requirements?
 - A1.2: No. According to the OMB Guidance (M-22-11), a “project” is defined as “...any activity related to the construction, alteration, maintenance, or repair of infrastructure in the United States.” Therefore, the BABA requirements are not implicated for infrastructure projects occurring outside of the United States, such as projects funded through the United States-Mexico-Canada Agreement with infrastructure activities occurring in Mexico or Canada (that is, outside the United States).
 -
- Q1.3: If most of the project is BABA compliant, and a small portion is not, can an assistance recipient self-fund (i.e., paying with non-federal dollars) the non-compliant products?
 - A1.3: Any project that is funded in whole or in part with federal assistance must comply with the BABA requirements, unless the requirements are otherwise waived. All iron, steel, manufactured products, and construction materials used in a project must meet the BABA requirements unless waived. Absent a waiver, there is no “small portion” or product that does not need to satisfy the BABA requirements unless the requirements are waived (or specifically excluded as is the case for cement and cementitious materials; aggregates such as stone, sand, or gravel; aggregate binding agents or additives; or non-permanent products). An assistance recipient may request a waiver or inquire as to whether a broad waiver, such as a *de minimis* waiver, might apply.

- Q1.4: How do international trade agreements affect the implementation of the BABA requirements?
 - A1.4: The BABA requirements apply in a manner consistent with United States obligations under international trade agreements. Typically, these obligations only apply to direct procurement by the entities that are signatories to these trade agreements. In general, assistance recipients are not signatories to such agreements, so these trade agreements have no impact on BABA implementation. In the few instances where such an agreement applies to a municipality, that municipality is responsible for determining its applicability and requirements and communicating with the funding authority (such as EPA and/or a state) on the actions taken to comply with BABA.

SECTION 2: PRODUCT COVERAGE

- Q2.1: For products made of iron and steel, what is the difference between predominantly and primarily iron and steel?
 - A2.1: EPA considers the terms “predominantly” and “primarily” to be interchangeable, such that a product is considered predominantly (or primarily) iron and steel if it contains greater than 50 percent iron and steel by material cost.
- Q2.2: What is the definition of construction materials (with examples)?
 - A2.2: From OMB Guidance M-22-11: “construction materials” include an article, material, or supply (other than an item of primarily iron or steel; a manufactured product; cement and cementitious materials; aggregates such as stone, sand, or gravel; aggregate binding agents or additives; or non-permanent products) that is or consists primarily of:
 - non-ferrous metals,
 - plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables), (including optic glass),
 - lumber, and
 - drywall.

For example, a plate of glass would be a construction material under BABA, but a framed window that incorporates the glass into a frame would be a manufactured product. Another common construction material for water infrastructure projects would be polyvinyl chloride (PVC) pipe and fittings. However, if PVC components are incorporated into a more complex product such as instrumentation and control equipment or a water treatment unit, those items would be manufactured products.

- Q2.3: What are manufactured products (with examples)?
 - A2.3: From OMB Guidance M-22-11: “...all manufactured products used in the project are produced in the United States—this means the manufactured product was manufactured in the United States; and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of

the total cost of all components of the manufactured product, unless another standard for determining the minimum amount of domestic content of the manufactured product has been established under applicable law or regulation...”

The manufactured products category would cover the majority of potential water infrastructure products, including complex products made up of a variety of material types and components. For water infrastructure projects, common manufactured products would include, but not be limited to, pumps, motors, blowers, aerators, generators, instrumentation and control systems, gauges, meters, measurement equipment, treatment equipment, dewatering equipment, actuators, and many other mechanical and electrical items.

- Q2.4: Which category will valves fall under for BABA? Will it differ from the American Iron and Steel (AIS) requirements?
 - A2.4: For programs that are subject to BABA and AIS (SRF, WIFIA, and Community Project Funding), projects using valves should classify them as iron and steel products under BABA as long as their material cost is made up of more than 50 percent iron and/or steel. Valves with 50 percent or less iron and/or steel by material cost would be considered manufactured products under the BABA requirements.

In accordance with OMB Guidance M-22-11, an article, material, or supply should be classified into only one of the three categories: iron and steel, manufactured products, or construction materials. Under the AIS requirements, all valves made primarily of iron and steel (that is, those with iron and/or steel material cost greater than 50 percent) must comply with the AIS requirements. For BABA, EPA interprets Section IV of OMB Guidance M-22-11 to mean that iron and steel products are those items that are primarily iron and steel, the same as for the AIS requirements.

- Q2.5: Does EPA have a list of products to be classified as “Iron and Steel” under BABA?
 - A2.5: Although this list is not comprehensive, the following products were classified as AIS products if made primarily (more than 50 percent) of iron and/or steel by materials cost (for programs subject to both AIS and BABA, this list would be equivalent for “iron and steel” items or products under either requirement):

Products likely made “primarily” of iron and steel to be classified as <u>Iron and Steel</u> under BABA		
Lined and Unlined Pipe	Lined and Unlined Fittings	Tanks
Flanges	Pipe Clamps and Restraints	Structural Steel
Valves	Hydrants	Pre-Cast, Iron/Steel Reinforced Concrete (of all types, regardless of iron/steel content percentage)
Manhole Covers and other Municipal Castings	Access Hatches	Ballast Screens
Iron or Steel Benches	Bollards	Cast Bases
Cast Iron Hinged Hatches	Cast Iron Riser Rings	Catch Basin Inlets

Cleanout/Monument Boxes	Construction Covers and Frames	Curb and Corner Guards
-------------------------	--------------------------------	------------------------

Products likely made “primarily” of iron and steel to be classified as Iron and Steel under BABA

Curb Boxes	Curb Openings	Curb Stops
Detectable Warning Plates	Downspout Shoes	Drainage Grates
Drainage Grate Frames and Curb Inlets	Inlets	Junction Boxes
Lampposts	Manhole Rings and Frames	Manhole Risers
Meter Boxes	Service Boxes	Steel Hinged Hatches
Steel Riser Rings	Trash Receptacles	Tree Grates
Tree Guards	Trench Grates	Valve Boxes
Valve Box Covers and Risers	Access Ramps	Aeration Pipes and Fittings (separate from aeration/blowers)
Angles	Backflow Preventers/Double Check Valves	Baffle Curtains
Iron or Steel Bar	Bathroom Stalls	Beam Clamps
Cable Hanging Systems	Clarifier Tanks	Coiled Steel
Column Piping	Concrete Reinforcing Bar, Wire, and Fibers	Condensate Sediment Traps
Corrugated Pipe	Couplings	Decking
Digester Covers	Dome Structures	Door Hardware
Doors	Ductwork	Expansion Joints
Expansion Tanks (diaphragm, surge, and hydropneumatics)	Fasteners	Fencing and Fence Tubing
Fire Escapes	Flanged Pipe	Flap Gates
Framing	Gate Valves	Generic Hanging Brackets
Grating	Ground Testing Boxes	Ground Test Wells
Guardrails	HVAC Registers, Diffusers, and Grilles	Joists
Knife Gates	Ladders	Lifting Hooks, J-bar, Connectors within, and Anchors for Concrete
Lockers	Man Baskets and Material Platforms	Manhole Steps
Mud Valves	Municipal Casting Junctions	Non-mechanical (aka stationary) Louvers and Dampers
Overhead Rolling Doors/ Uplifting Doors (manual open, no motor)	Pipe Connectors	Pipe Hangers
Pipe Pilings (any type of steel piling)	Pipe Spool (pipe, flanges, connectors, etc.)	Pipe Supports
Pitless Adaptors	Pre-fab Steel Buildings/Sheds (simple structure, unfurnished)	Pre-stressed Concrete Cylinder Pipe (PCCP)
Railings	Reduced Pressure Zone (RPZ) Valves	Roofing
Service Saddles	Sheet Piling	Sinks (not part of eyewash systems)
Solenoid Valves	Stairs	Static Mixers
Stationary Screens	Surface Drains	Tapping Sleeves
Telescoping Valves	Tipping Buckets	Trusses
Tubing	Valve Stem Extensions	Valve Stems (excluding handwheels and actuators)

Wall Panels	Wall Sleeves/Floor Sleeves	Welding Rods
Well Casing	Well Screens	Wire
Wire Cloth	Wire Rod	Wire Rope and Cables

Q2.6: Does EPA have a list of products that could be made “primarily” of iron and steel but would be classified as “manufactured products” under BABA?

A2.6: Although this list is not comprehensive, the following products would be considered “manufactured products” under the BABA requirements, even if the item might be composed primarily of iron and steel by materials cost (Note: These items are not subject to the AIS requirements.):

Products likely made “primarily” of iron and steel to be classified as <u>Manufactured Products</u> under BABA		
Actuator Superstructures/ Support Structures	Aeration Nozzles and Injectors	Aerators
Analytical Instrumentation	Analyzers (e.g., ozone, oxygen)	Automated Water Fill Stations
Blowers/Aeration Equipment	Boilers, Boiler Systems	Chemical Feed Systems (e.g., polymer, coagulant, treatment chemicals)
Chemical Injection Quills	Chemical Injectors	Clarifier Mechanisms/Arms
Compressors	Controls and Switches	Conveyors
Cranes	Desiccant Air Dryer Tanks	Dewatering Equipment
Dewatering Roll-offs	Disinfection Systems	Drives (e.g., variable frequency drives)
Electric/Pneumatic/Manual Accessories Used to Operate Valves (such as electric valve actuators)	Electrical Cabinetry and Housings (such as electrical boxes/enclosures)	Electrical Conduit
Electrical Junction Boxes	Electronic Door Locks	Elevator Systems (hydraulic, etc.,)
Emergency Life Systems (including eyewash stations, emergency safety showers, fire extinguishers, fire suppression systems including sprinklers /piping/valves, first aid, etc.)	Exhaust Fans	Fall Protection Anchor Points
Fiberglass Tank w/Appurtenances	Filters (and appurtenances, including underdrains, backwash systems)	Flocculators
Fluidized Bed Incinerators	Galvanized Anodes/Cathodic Protection	Gear Reducers
Generators	Geothermal Systems	Grinders
Heat Exchangers	HVAC (excluding ductwork)	HVAC Dampers (if appurtenances to aerators/blowers)
HVAC Louvers (mechanical)	Intake and Exhaust Grates (if appurtenances to aerators/blowers)	Instrumentation
Laboratory Equipment	Ladder Fall Prevention Systems	Ladder Safety Posts
Lighting Fixtures	Lightning and Grounding Rods	Mechanical or Actuated Louvers/Dampers
Membrane Bioreactor Systems	Membrane Filtration Systems	Metal Office Furniture (fixed)

Meters (including flow, wholesale, water, and service connection)	Motorized Doors (unit)	Motorized Mixers
Motorized Screens (such as traveling screens)	Motors	Pelton Wheels
Pipeline Flash Reactors (similar to injectors)	Plate Settlers	Precast Concrete without Iron/Steel Reinforcement

Products likely made “primarily” of iron and steel to be classified as <u>Manufactured Products</u> under BABA		
Furnished Pre-fab Buildings (such as furnished with pumps, mechanics inside)	Presses (including belt presses)	Pressure Gauges
Pump Cans/Barrels and Strainers	Pumps	Mechanical Rakes
Safety Climb Cable	Sampling Stations (unless also act as hydrant)	Scrubbers
Sensors	Sequencing Batch Reactors (SBR)	Steel Shelving (fixed)
Slide and Sluice Gates	Spray Header Units	Steel Cabinets (fixed interior/furniture)
Supervisory Control and Data Acquisition (SCADA) Systems	Tracer Wire	Valve Manual Gears, Actuators, Handles
Voltage Transformer	Water Electrostatic Precipitators (WESP)	Water Heaters
Weir Gates		

- Q2.7: Is asphalt paving a covered product under BABA?
 - A2.7: No. EPA interprets Section 70917(c) of the IIJA to exclude asphalt from BABA requirements. Asphalt paving is a type of concrete composed of an aggregate material mixed with a binder (bitumen). EPA considers asphalt concrete to be excluded by section 70917(c) due to its similarities with cement and cementitious materials.

SECTION 3: CO-FUNDING

- Q3.1: If projects are co-funded with funding mechanisms that don’t require BABA, must the entire project comply with BABA?
 - A3.1: Yes. Any project that is funded in whole or in part with federal assistance must comply with the BABA requirements, unless the requirements are otherwise waived. A “project” consists of all construction necessary to complete the building or work regardless of the number of contracts or assistance agreements involved so long as all the contracts and assistance agreements awarded are closely related in purpose, time, and place. This precludes the intentional splitting of projects into separate and smaller contracts or assistance agreements to avoid BABA’s applicability on some portions of a larger project, particularly where the activities are integrally and proximately related to the whole. However, there are many situations in which major construction activities are clearly undertaken in separate phases that are distinct in purpose, time, or place, in which case, separate contracts or assistance agreements would carry separate requirements.

- Q3.2: How will project requirements be determined for co-funded projects subject to potentially different general applicability/programmatic waiver conditions (such as different adjustment period waivers)?
 - A3.2: OMB Guidance M-22-11 addresses cases with project co-funding from separate programs. EPA would apply the guidance’s “cognizant” program determination to projects that are co-funded with different general applicability/programmatic waivers. For instance, if a project were co-funded between WIFIA and SRF and the majority of the Federal funding for the project is from WIFIA, then WIFIA would be the “cognizant” program for application and determination of waivers. In that case, any conditions from an applicable WIFIA waiver would apply.

SECTION 4: WAIVERS

- Q4.1: Who may apply for a waiver and how do you apply?
 - A4.1: Assistance recipients and their authorized representatives may apply for a project-specific waiver. EPA does not accept waiver requests from suppliers, distributors, or manufacturers unless the assistance recipient endorses and submits the request on its own behalf to the funding authority. In the case where multiple programs are providing federal funds to the project, the assistance recipient should submit the waiver request to the cognizant program, the one providing the greatest amount of federal funds for the project. For information on applying for cost waivers, see questions 4.4 and 4.5. For information on the SRF program roles and responsibilities, see question 7.6.

Project-specific waiver requests should generally include: (1) a brief summary of the project, (2) a description and explanation of the need for the waiver for the product(s) in question, (3) a brief summary of the due diligence conducted in search of domestic alternatives (which could include correspondence between assistance recipient and supplier/distributors), (4) the quantity and materials of the product(s) in question, (5) all engineering specifications and project design considerations relevant to the product(s) in question, (6) the approximate unit cost of items (both foreign and domestic) in addition to an estimated cost of the materials and overall project, (7) the date any products will be needed on site in order to avoid significant project schedule disruptions, and (8) any other pertinent information relevant to EPA’s consideration of the waiver (e.g., if relevant for SRF projects: whether the project is designated as an equivalency project, the date the plans and specifications were submitted to the state, the date of construction initiation, expected date of project completion, any special considerations such as local zoning and building ordinances, seismic requirements, or noise or odor control requirements).

In the case of indirect federal assistance, such as the SRF programs, the state authority reviews and conveys the waiver request to EPA. States should submit waiver requests to the appropriate program waiver request inbox. For SRF projects, please use CWSRFWaiver@epa.gov or DWSRFWaiver@epa.gov.

- Q4.2: Can an assistance recipient request a waiver based on a specification written for a specific brand or model of product (that is, a specification that names a branded item or model)?
 - A4.2: In most cases, performance-based specifications are expected and required for the majority of infrastructure projects funded by EPA's financial assistance programs. In rare cases where "branded" or product-specific sourcing may be included in project specifications, it is suggested that the specifications include the item in question (that is, not simply a catalog page, but also materials of construction, sizing, quantities, and applicable engineering performance design characteristics for the project, etc.) in addition to the standard phrase "or equal." For the purposes of product alternative market research, EPA will evaluate the BABA requirements based on performance-based engineering specifications for the product(s) in question. If the project's specifications do not include performance-based specifications, or at least an "or equal" designation, EPA will base its research on an "or equal" designation using best professional judgment to the extent practicable.
- Q4.3: If a manufactured product is not readily available domestically, will EPA provide short-term "limited availability" product waivers?
 - A4.3: EPA will address the unavailability of domestic products through the waiver process, including potential national short-term waivers for specific products, if appropriate. To the extent practicable and with the intent to maximize domestic market and supply chain development, EPA intends to address issues of broad product unavailability with targeted, time-limited, and conditional waivers, as prescribed in OMB Guidance M-22-11. EPA will follow its robust and thorough product research processes (those put into place for the AIS requirements for the SRF and WIFIA programs and expanded for the new BABA requirements) to identify and determine those products for which proposed national/general applicability waivers may be appropriate.
- Q4.4: What information is needed when applying for a cost waiver under BABA?
 - A4.4: As part of the cost waiver request, the assistance recipient must demonstrate that implementation of the BABA requirements will increase the overall project cost more than 25 percent. Depending on the circumstances of the overall project cost increases, documentation to justify the cost waiver can vary but may include itemized cost estimates or bid tabulations comparing project costs with and without BABA implementation. Assistance recipients should begin assessing the potential cost impacts of the BABA requirements during the design phase of a project.
- Q4.5: Can administrative costs associated with tracking and verification of certifications be considered when determining if the cost of a project increases by 25 percent or more?
 - A4.5: Yes. Section 70914(b)(3) of the IIJA states that a waiver may be provided if the overall

cost of the project increases by more than 25 percent due to the “inclusion of iron, steel, manufactured products, or construction materials produced in the United States.” EPA interprets this to mean that the “inclusion” of the BABA-covered products could encompass reasonable administrative costs associated with complying with the BABA requirements, such as staff, contractor, and technological resources to collect and track BABA compliance documentation.

- Q4.6: How can assistance recipients and construction contractors address product delivery delays?
 - A4.6: Assistance recipients should reasonably plan for material procurement to account for known potential supply chain issues or extended lead times and shall notify the funding authority well in advance of the issues so that prompt attention can be given to explore options. Where extended lead times for compliant products are impacting project schedules and may significantly impact construction progress, timely communication with the funding agency is important. For products that are unavailable within a reasonable timeframe to meet the objectives and schedule of a project, EPA may consider a non-availability waiver with adequate justification. An assistance recipient would need to apply for the waiver and contact its funding authority (such as EPA and/or a state) to initiate the waiver process.

SECTION 5: DOCUMENTING COMPLIANCE

- Q5.1: Who will be responsible for BABA enforcement?
 - A5.1: Responsibility for BABA implementation applies at all levels, from manufacturers to suppliers and distributors, construction contractors, assistance recipients, and funding authorities.

The manufacturers have responsibility to provide adequate and accurate documentation of the products manufactured. If suppliers and distributors are involved, they are responsible for passing along compliance documentation for products supplied to projects that are subject to the BABA requirements.

The assistance recipient and their representatives are primarily responsible for ensuring the documentation collected for products used on the project is sufficient to document compliance with the BABA requirements.

The funding authority is responsible for providing oversight and guidance as needed to ensure the proper implementation of the requirements. The Uniform Grants Guidance (UGG) (Title 2 of the Code of Federal Regulations (CFR) Part 200) applies to many Federal financial assistance agreements that will include BABA requirements. The general provisions of 2 CFR Part 200 determine the responsible party for the grant funding authority.

For information on SRF program roles and responsibilities, see question 7.6. At all levels, where fraud, waste, abuse, or any violation of the law is suspected, the Office of Inspector General (OIG) should be contacted immediately. The OIG can be reached at 1-888- 546-8740

or OIG_Hotline@epa.gov. More information can be found at this website:
<http://www.epa.gov/oig/hotline.htm>.

- Q5.2: When will the BABA requirements be assessed for compliance? Do assistance recipients need to have waivers for potential non-domestic products before assistance agreements are in place, at the time products are procured or products are incorporated into the project (i.e., used)?
 - A5.2: Compliance is assessed where the domestic product is used (or installed) at the project site. Proper compliance documentation, whether it is a BABA certification letter or a waiver, should accompany a product prior to its “use”, in accordance with Section 70914(a) of IIJA. This may occur prior to assistance agreements being in place but is not necessary. Additionally, communication of BABA requirements through appropriate Terms and Conditions in financial assistance agreements and in project solicitation and contract documents is key in ensuring all parties involved are informed of the requirements for the project before construction is underway.
- Q5.3: How can product compliance with the BABA requirements be demonstrated?
 - A5.3: Assistance recipients and their representatives should ensure that the products delivered to the construction site are accompanied by proper documentation that demonstrate compliance with the law and be made available to the funding authority upon request. The documentation may be received and maintained in hard copy, electronically, or could be embedded in construction management software. The use of a signed certification letter for the project is the most direct and effective form of compliance documentation for ensuring products used on site are BABA-compliant prior to their installation; however, other forms of documentation are also acceptable as long as collectively, the following can be demonstrated:
 - (1) Documentation linked to the project. For example, this can be in the form of the project name, project location, contract number, or project number.
 - (2) Documentation linked to the product used on the project. For example, description of product(s) (simple explanation sufficient to identify the product(s)), or an attached (or electronic link to) purchase order, invoice, or bill of lading.
 - (3) Documentation includes statement attesting that the products supplied to the assistance recipient are compliant with BABA requirement. Reference to the Infrastructure Investment and Jobs Act (“IIJA”) or the Bipartisan Infrastructure Law (BIL) are also acceptable. For iron and steel items under BABA, references to the American Iron and Steel (AIS) requirements are also acceptable and reciprocal with BABA for such items.
 - (4) Documentation that manufacturing occurred in the United States, which could include, for example, the location(s) of manufacturing for each manufacturing step that is being certified. It is acceptable for manufactured products to note a single point of manufacturing, documenting that the final point of manufacturing is in the United States. Note that each BABA category may require different determinations for

compliance.

- (5) Signature of company representative (on company letterhead and signature can be electronic). The signatory of the certifying statement affirms their knowledge of the manufacturing processes for the referenced product(s) and attests that the product meets the BABA requirements.

In addition to compliance documentation, assistance recipients or their representatives should also conduct a visual inspection of the product when it arrives to the project site, especially for iron and steel products which are often stamped with the country of origin. (Note: A country of origin stamp alone is not sufficient verification of compliance with BABA and assistance receipts should not rely on it to ensure compliance.)

EPA may develop alternative procedures for demonstrating compliance. Additional project- or program-specific instructions may be developed on a case-by-case basis in order to meet individual circumstances.

- Q5.4: Will EPA provide a form or template for tracking and documenting compliance?
- A5.4: EPA does not require a specified format for tracking or documenting compliance. Assistance recipients are free to develop any system (from simple to complex software) for tracking items used on the project and the accompanying compliance documentation, e.g., certification letters, applicable waivers, if it helps with implementation and compliance. Elements that may help with keeping track of compliance may include: product description, quantity required/used, product category (i.e., iron and steel, manufactured product, or construction material), status of obtaining certification letter, product cost, and whether the item might qualify as *de minimis*, or qualify under another applicable waiver.
- Q5.5: If a manufacturer claims to comply with the Buy American Act, does it also comply with BABA?
 - A5.5: No. With the exception of the AIS requirements – which EPA interprets to be equivalent to the “iron and steel” requirements under BABA – EPA does not have an interpretation about the comparability of other domestic preference requirements relative to BABA. Any products that are to be certified as compliant with BABA should include a specific reference to the BABA requirements and appropriate attestation from a responsible manufacturing company official. See Question 5.3 for EPA’s recommendations for BABA certification letters.
- Q5.6: How will assistance recipients manage certification letters for hundreds, possibly thousands of products?

A5.6: EPA recognizes that the new BABA requirements will cover most products used in typical water and wastewater infrastructure projects, and that the number of items which may require certification at large and/or complex projects may reach several hundred. EPA is concerned about the potential administrative burden that this would place on assistance recipients. EPA recommends that projects with a high number of potentially covered

products meet with their funding authority about potential compliance strategies to minimize burden and streamline compliance activity. Assistance recipients should prepare contract bid solicitation documents with a statement for the consulting engineers and construction firms as follows: “By signing payment application and recommending payment, Contractor certifies they have reviewed documentation for all products and materials submitted for payment, and the documentation is sufficient to demonstrate compliance with Build America, Buy America Act requirements.” In most cases, the assistance recipient’s representatives may assume the responsibility for their clients to conduct due diligence on compliance with applicable domestic preference requirements.

- Q5.7: Who is responsible for documenting the 55 percent content requirement for manufactured products under BABA? What if the final manufacturer cannot trace or verify domestic origin for all components?
 - A5.7: The manufacturer who signs a certification letter is responsible for documenting compliance with any of the three categories of products (iron and steel, manufactured products, or construction materials). For manufactured products, BABA requires that greater than 55 percent of the total cost of all components of the manufactured product be from domestic sources. EPA recommends that the certification letter for manufactured products document whether the item passes the content test in the final product along with a statement attesting to compliance with the BABA requirements for manufactured products.
- Q5.8: How do final product fabricators document compliance when the final step of manufacturing may be simply assembling components?
 - A5.8: It is acceptable, in many cases, especially for highly complex manufactured products that utilize many sub-components, for the final point of assembly to certify without using a “step certification” process. Multiple certifications (i.e., step certifications) or a singular certification can be used for a product, as long as the certifying official is willing to attest to the product’s compliance with BABA requirements at all stages of manufacturing.
- Q5.9: Will Material Test Reports be acceptable in lieu of a BABA certification for iron and steel?
 - A5.9: Material Test Reports (MTRs, commonly referred to as “Mill Certifications” or “Mill Certs”) provide the chemical composition of steel and iron from a mill or foundry. If an MTR accompanies the delivery of steel or iron to a project site with an invoice or bill of lading, EPA will consider it sufficient to demonstrate compliance (equivalent to a certification letter) as long as the MTR includes a manufacturer representative’s signature in addition to the location (city and state) of the mill/foundry. It is common for MTRs to be the first letter in a “step certification” if the product is further fabricated or painted, etc., by another manufacturer.
- Q5.10: Can a manufacturer use a fillable certification letter for products?

- A5.10: EPA recommends that certifications be signed by representatives of the manufacturing entity. EPA does not oppose manufacturers using forms to internally develop letters within their company, thereby providing signed, non-manipulable certification letters to suppliers, distributors, and/or assistance recipients. A fillable form that can be changed by someone outside of the manufacturer after signature does not demonstrate compliance and may create compliance concerns for the manufacturer or assistance recipient.
- Q5.11: Are product certifications from suppliers and distributors allowed?
 - A5.11: EPA recommends that representatives of product manufacturers certify compliance and discourages suppliers and distributors from creating certification letters. EPA does not rule out the possibility that a third-party certification process, such as a certification by a distributor, may be viable. However, EPA is currently not aware of a system or proposed system that meets the EPA's recommendations for documentation of product certification.
- Q5.12: How long should assistance recipients keep compliance documentation?
 - A5.12: Assistance recipients should apply recordkeeping requirements for the project according to the procedures dictated by the funding authority. For most EPA grant programs, this is prescribed in the UGG at 2 CFR 200.334-200.338; e.g., the SRF programs require a minimum of three years. Other funding programs may require longer documentation retention periods.

SECTION 6: PROGRAMS WITH AMERICAN IRON AND STEEL REQUIREMENTS

- Q6.1: Does BABA supersede the American Iron and Steel (AIS) Requirements?
 - A6.1: The BABA requirements for items considered "iron and steel" are equivalent to those for covered iron and steel products under the AIS requirements in the Clean Water Act and the Safe Drinking Water Act. These requirements apply to the CWSRF, DWSRF, WIFIA, and Water infrastructure Community Grants. BABA includes a "Savings Provision" (Section 70917(b)) that states that BABA does not affect existing domestic content procurement preferences for infrastructure projects funded by Federal financial assistance programs that meet the requirements of section 70914. EPA views the AIS requirements as meeting the "iron and steel" product requirements of BABA Section 70914, as they both include the key requirement that items made of iron and steel be wholly manufactured in the United States from the point of melting and/or pouring the iron or steel components through final manufacturing step. Because of the "Savings Provision" of Section 70917, the AIS requirements satisfy the "iron and steel" requirements of BABA. For the programs that have AIS requirements, EPA intends to implement BABA requirements the same way for iron and steel items as it has done for AIS products.

- Q6.2: For iron and steel products, does a manufacturer need to demonstrate compliance from initial melting through the finished product?
 - A6.2: For iron and steel products, the BABA requirements are the same as the existing AIS requirements, in that all of the iron and steel in a covered product (that is, the product is comprised of more than 50 percent iron and steel by material cost) must be melted and poured in the United States and all subsequent manufacturing processes (such as grinding, rolling, bending, reheating, and casting) must occur in the United States.

Q6.3: Will EPA apply the same manufacturing standards for BABA iron and steel products as for the American Iron and Steel (AIS) requirements?

- A6.3: Yes. For AIS, EPA did not require raw materials used in the production of steel or iron to be domestically sourced. For BABA, EPA interprets the requirements to be the same. Hence, like AIS, raw materials in the production of iron and steel subject to BABA requirements would not need to be domestically sourced. The key step for both AIS and BABA domestic iron and/or steel production is the melting/pouring (that is, the location of the furnace), which must be in the United States.
- Q6.4: Will the certification process be similar to the process established for the American Iron and Steel requirements?
 - A6.4: EPA expects the certification process for the BABA requirements to be very similar to that established for the AIS requirements. For iron and steel products, the process should remain the same for AIS and BABA. EPA recommends for manufactured products and for construction materials that certification letters include direct reference to the product/material content requirements under BABA, in addition to an affirmative statement verifying that the product meets the BABA requirements.
- Q6.5: Will duplicate certification letters be required for AIS and BABA for iron/steel products?
 - A6.5: No. Compliance with BABA requirements will be sufficient to demonstrate compliance with AIS requirements for iron and steel products. If a project is subject to BABA, the only demonstration of compliance necessary is with the BABA requirements, of which the iron and steel requirements are equivalent to those of the AIS statutory requirements: the iron or steel in a product made primarily or predominantly of iron and steel (comprising more than 50 percent iron and steel by material cost) must be melted and/or poured in the United States and all subsequent manufacturing processes must occur in the United States.

SECTION 7: PROGRAM-SPECIFIC ISSUES

- Q7.1.: How do the BABA requirements apply to Community Grants?
 - A7.1: The Community Project Funding/Congressionally Directed Spending grants for the construction of drinking water, wastewater, and stormwater infrastructure and for water

quality protection are subject to the requirements specified in the explanatory statement accompanying the Consolidated Appropriations Act (Explanatory Statement for Division G of P.L. 117-13, the Consolidated Appropriations Act of 2022). The explanatory statement asserts: “Applicable Federal requirements that would apply to a Clean Water State Revolving Fund or Drinking Water State Revolving Fund project grant recipient shall apply to a grantee receiving a CPF grant under this section.” Therefore, the federally funded Community Project Funding/Congressionally Directed Spending grants are subject to the same requirements that apply to CWSRF or DWSRF projects, including BABA and AIS requirements. See also A1.2.

- Q7.2: Should SRF projects covered by the BABA SRF Projects Design Planning Adjustment Period Waiver follow the same procedures for demonstrating compliance as outlined for American Iron and Steel requirements?
 - A7.2: Yes. The SRF Design Planning Adjustment Period waiver does not waive the iron and steel requirements under BABA. The SRF programs have existing domestic preference requirements for SRF projects under CWA Section 608 and SDWA Section 1452(a)(4) (AIS requirements) to use iron and steel products that are produced in the United States. Sections 70917(a) and (b) of BIL explain the application of BABA to existing domestic preference requirements. Specifically, the savings provision in Section 70917(b) states that existing domestic preference requirements that meet BABA requirements are not affected by BABA. The statutory AIS requirements were existing at the time BABA became law and satisfy the BABA iron and steel requirements. Therefore, the statutory AIS requirements that have previously applied to SRF-funded projects will continue to do so, and compliance with AIS requirements will satisfy the BABA iron and steel requirements. Demonstration of compliance for iron and steel products will follow the AIS implementation policies for projects subject to the waiver.
- Q7.3: For SRF programs, is BABA considered a federal cross-cutting authority? (i.e., do “equivalency” rules apply?)
 - A7.3: Yes, BABA is considered a federal cross-cutting requirement that applies to SRF assistance equivalent to the federal capitalization grant (i.e., “equivalency” projects). EPA’s SRF regulations at 40 CFR 35.3145 and 35.3575 require states and recipients of SRF funds equivalent to the amount of the federal capitalization grant to comply with federal cross-cutting requirements. Section 70914 of the IIJA, which states when a Buy America preference applies, explains that “none of the funds made available for a Federal financial assistance program for infrastructure...may be obligated for a project unless all of the iron, steel, manufactured products, and construction materials used in the project are produced in the United States.” Therefore, BABA only applies to projects funded in an amount equivalent to the federal capitalization grant and not to those projects receiving funds in excess of the capitalization grant (i.e., “non-equivalency” projects). (Note: The AIS requirements continue to apply for all SRF projects, including non-equivalency projects, and all WIFIA and Community Grant projects, because equivalency does not apply.)

- Q7.4: Do the BABA requirements apply to Drinking Water State Revolving Fund set-asides?
 - A7.4: Due to requirements related to the deposit of funds in the DWSRF program, almost all of the funds used to conduct set-aside activities are Federal dollars. Therefore, Federal cross-cutting requirements must be applied to all set-aside activities. However, in the case of most set-aside activities, the cross-cutting requirements will not be implicated because of the nature of the activities conducted under the set-asides. Because the BABA requirements only apply to infrastructure, and infrastructure typically is not an eligible set-aside expenditure (with one potential exception being loans for incentive-based source water protection measures under the Local Assistance and Other State Programs Set-Aside), the BABA requirements will not apply to most set-aside activities.
- Q7.5: What if an SRF project is refinanced using Federal financial assistance on or after May 14, 2022?
 - A7.5: If an SRF project began construction, financed from another funding source, prior to May 14, 2022, but is refinanced through an assistance agreement executed on or after that date, BABA requirements will apply to all construction that occurs on or after May 14, 2022, through completion of construction, unless a waiver applies. There is no retroactive application of the BABA requirements where a refinancing occurs for an SRF project that has completed construction prior to May 14, 2022. (Note: If SRF funding is used for the refinancing, the AIS requirements may still apply depending on the timing of construction.)
- Q7.6: What are the roles and responsibilities for SRF programs for BABA implementation?
 - A7.6: Implementation of the BABA requirements for the State Revolving Fund programs will continue the roles and responsibilities from the successful AIS implementation process.

As with AIS, it is both the assistance recipient's and the state's responsibility to ensure compliance with the BABA requirements. The state is the recipient of a federal capitalization grant and must comply with all grant conditions, including a condition requiring adherence to BABA requirements.

Consequently, states are strongly advised to conduct site visits of projects during construction and review documentation demonstrating the assistance recipient's proof of compliance. In EPA's experience, most states conduct periodic site visits and arrange timely meetings with funded projects. Observed best practices typically include a meeting early in the process (sometimes before bid and usually prior to commencing construction) and at least one project site visit during the construction process. Assistance recipients must maintain documentation of compliance with the BABA requirements, as explained in question 5.3. The documents must be kept by the assistance recipient and should be reviewed by the state during project reviews.

The state's role in the waiver process is to review any waiver requests submitted to the state to ensure that all necessary information has been provided by the assistance recipient prior to forwarding the request to EPA. If a state finds the request lacking, the state should work with

the assistance recipient to help obtain complete information. Question 4.1 explains the information needed by EPA to expediently review a waiver request.

In order to implement the BABA requirements, EPA has developed an approach for effective and efficient implementation of the waiver process to allow projects to proceed in a timely manner. The framework described below will allow states, on behalf of the assistance recipients, to apply for waivers of the BABA requirements directly to EPA Headquarters. Only waiver requests received and/or endorsed from states will be considered. Pursuant to BABA, EPA has the responsibility to make findings as to the issuance of waivers to the BABA requirements.

Step-by-step SRF Waiver Process

The waiver process begins with the assistance recipient. To fulfill the BABA requirements, the assistance recipient must in good faith design the project (where applicable) and solicit bids for construction with American-made iron and steel, manufactured goods, and construction materials. It is essential that the assistance recipient include the BABA terms in any request for proposals or solicitations for bids, and in all contracts (see Appendix 2 for sample construction contract language). The assistance recipient may receive a waiver at any point before, during, or after the bid process, if one or more of three statutory conditions is demonstrated to EPA and approved.

To apply for a project-specific waiver, the assistance recipient should email the request in the form of a Word document (.doc) or editable PDF (.pdf) to the funding program. It is strongly recommended that each state identify a person or persons for BABA communications. The state designee(s) will review the application for the waiver and determine whether the necessary information has been included (Note: More information may be provided in the future regarding what information is required to be included in waiver requests). Once the waiver application is complete, the designee (State) will forward the application to the EPA for review.

Evaluation by EPA

After receiving an application for waiver of the BABA requirements and ensuring sufficient information was provided, EPA will publish the request on its website for 15 days and receive public comment. EPA will then determine whether the application properly and adequately documents and justifies the statutory basis cited for the waiver.

In the event that EPA finds that adequate documentation and justification has been submitted, the Administrator may grant a waiver to the assistance recipient. EPA will notify the state designee whether a waiver request has been approved or not approved as soon as such a decision has been made. Granting such a waiver is a four-step process:

1. Research – After receiving an application for a waiver, EPA will perform market research to determine whether the iron, steel, manufactured goods, or construction materials are available domestically.
2. Posting – After research, if no domestic product has been identified, EPA is required to

publish the application and all material submitted with the application on EPA's website for 15 days. During that period, the public will have the opportunity to review the request and provide informal comment to EPA. The website can be found at:
<https://www.epa.gov/cwsrf/build-america-buy-america-baba-waivers-open-public-comment>.

3. Evaluation – After receiving an application for waiver of the BABA requirements, EPA will determine whether the application properly and adequately documents and justifies the statutory basis cited for the waiver to determine whether or not to grant the waiver.

4. Signature of waiver approval by the Administrator or another agency official with delegated authority – As soon as the waiver is signed and dated, EPA will notify the State SRF program and post the signed waiver on the Agency's website. The assistance recipient should keep a copy of the signed waiver in its project files.

(Note: Additional steps may be required in the future regarding the waiver process depending on additional guidance from OBM) APPENDIX 1



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

MAR 20 2014

OFFICE OF WATER

MEMORANDUM

SUBJECT: Implementation of American Iron and Steel provisions of P.L. 113-76, Consolidated Appropriations Act, 2014

FROM: f (Andrew D. Sawyers, Director C.
l) Office of Wastewater Management (4201M)

Peter C. Grevatt, Director
Office of Ground Water and Drinking Water (4601M)

TO: Water Management Division Directors
Regions I - X

P.L. 113-76, Consolidated Appropriations Act, 2014 (Act), includes an "American Iron and Steel (AIS)" requirement in section 436 that requires Clean Water State Revolving Loan Fund (CWSRF) and Drinking Water State Revolving Loan Fund (DWSRF) assistance recipients to use iron and steel products that are produced in the United States for projects for the construction, alteration, maintenance, or repair of a public water system or treatment works if the project is funded through an assistance agreement executed beginning January 17, 2014 (enactment of the Act), through the end of Federal Fiscal Year 2014.

Section 436 also sets forth certain circumstances under which EPA may waive the AIS requirement. Furthermore, the Act specifically exempts projects where engineering plans and specifications were approved by a State agency prior to January 17, 2014.

The approach described below explains how EPA will implement the AIS requirement. The first section is in the form of questions and answers that address the types of projects that must comply with the AIS requirement, the types of products covered by the AIS requirement, and compliance. The second section is a step-by-step process for requesting waivers and the circumstances under which waivers may be granted.

Implementation

The Act states:

Sec. 436. (a)(1) None of the funds made available by a State water pollution control revolving fund as authorized by title VI of the Federal Water Pollution Control Act (33 U.S.C. 1381 et seq.) or made available by a drinking water treatment revolving loan fund as authorized by section 1452 of the Safe Drinking Water Act (42 U.S.C. 300j-12) shall be used for a project for the construction, alteration, maintenance, or repair of a public water system or treatment works unless all of the iron and steel products used in the project are produced in the United States.

(2) In this section, the term “iron and steel products” means the following products made primarily of iron or steel: lined or unlined pipes and fittings, manhole covers and other municipal castings, hydrants, tanks, flanges, pipe clamps and restraints, valves, structural steel, reinforced precast concrete, and construction materials.

(b) Subsection (a) shall not apply in any case or category of cases in which the Administrator of the Environmental Protection Agency (in this section referred to as the “Administrator”) finds that—

(1) applying subsection (a) would be inconsistent with the public interest;

(2) iron and steel products are not produced in the United States in sufficient and reasonably available quantities and of a satisfactory quality; or

(3) inclusion of iron and steel products produced in the United States will increase the cost of the overall project by more than 25 percent.

(c) If the Administrator receives a request for a waiver under this section, the Administrator shall make available to the public on an informal basis a copy of the request and information available to the Administrator concerning the request, and shall allow for informal public input on the request for at least 15 days prior to making a finding based on the request. The Administrator shall make the request and accompanying information available by electronic means, including on the official public Internet Web site of the Environmental Protection Agency.

(d) This section shall be applied in a manner consistent with United States obligations under international agreements.

(e) The Administrator may retain up to 0.25 percent of the funds appropriated in this Act for the Clean and Drinking Water State Revolving Funds for carrying out

the provisions described in subsection (a)(1) for management and oversight of the requirements of this section.

(f) This section does not apply with respect to a project if a State agency approves the engineering plans and specifications for the project, in that agency's capacity to approve such plans and specifications prior to a project requesting bids, prior to the date of the enactment of this Act.

The following questions and answers provide guidance for implementing and complying with the AIS requirements:

Project Coverage

1) What classes of projects are covered by the AIS requirement?

All treatment works projects funded by a CWSRF assistance agreement, and all public water system projects funded by a DWSRF assistance agreement, from the date of enactment through the end of Federal Fiscal Year 2014, are covered. The AIS requirements apply to the entirety of the project, no matter when construction begins or ends. Additionally, the AIS requirements apply to all parts of the project, no matter the source of funding.

2) Does the AIS requirement apply to nonpoint source projects or national estuary projects?

No. Congress did not include an AIS requirement for nonpoint source and national estuary projects unless the project can also be classified as a 'treatment works' as defined by section 212 of the Clean Water Act.

3) Are any projects for the construction, alteration, maintenance, or repair of a public water system or treatment works excluded from the AIS requirement?

Any project, whether a treatment works project or a public water system project, for which engineering plans and specifications were approved by the responsible state agency prior to January 17, 2014, is excluded from the AIS requirements.

4) What if the project does not have approved engineering plans and specifications but has signed an assistance agreement with a CWSRF or DWSRF program prior to January 17, 2014?

The AIS requirements do not apply to any project for which an assistance agreement was signed prior to January 17, 2014.

5) What if the project does not have approved engineering plans and specifications, but bids were advertised prior to January 17, 2014 and an assistance agreement was signed after January 17, 2014?

If the project does not require approved engineering plans and specifications, the bid advertisement date will count in lieu of the approval date for purposes of the exemption in section 436(f).

6) What if the assistance agreement that was signed prior to January 17, 2014, only funded a part of the overall project, where the remainder of the project will be funded later with another SRF loan?

If the original assistance agreement funded any construction of the project, the date of the original assistance agreement counts for purposes of the exemption. If the original assistance agreement was only for planning and design, the date of that assistance agreement will count for purposes of the exemption only if there is a written commitment or expectation on the part of the assistance recipient to fund the remainder of the project with SRF funds.

7) What if the assistance agreement that was signed prior to January 17, 2014, funded the first phase of a multi-phase project, where the remaining phases will be funded by SRF assistance in the future?

In such a case, the phases of the project will be considered a single project if all construction necessary to complete the building or work, regardless of the number of contracts or assistance agreements involved, are closely related in purpose, time and place. However, there are many situations in which major construction activities are clearly undertaken in phases that are distinct in purpose, time, or place. In the case of distinct phases, projects with engineering plans and specifications approval or assistance agreements signed prior to January 17, 2014 would be excluded from AIS requirements while those approved/signed on January 17, 2014, or later would be covered by the AIS requirements.

8) What if a project has split funding from a non-SRF source?

Many States intend to fund projects with “split” funding, from the SRF program and from State or other programs. Based on the Act language in section 436, which requires that American iron and steel products be used in any project for the construction, alteration, maintenance, or repair of a public water system or treatment works receiving SRF funding between and including January 17, 2014 and September 30, 2014, any project that is funded in whole or in part with such funds must comply with the AIS requirement. A “project” consists of all construction necessary to complete the building or work regardless of the number of contracts or assistance agreements involved so long as all contracts and assistance agreements awarded are closely related in purpose, time and place. This precludes the intentional splitting of SRF projects into separate and smaller contracts or assistance agreements to avoid AIS coverage on some portion of a larger project, particularly where the activities are integrally and proximately related to the whole. However, there are many situations in which major construction activities are clearly undertaken in separate phases that are distinct in purpose, time, or place, in which

case, separate contracts or assistance agreement for SRF and State or other funding would carry separate requirements.

9) What about refinancing?

If a project began construction, financed from a non-SRF source, prior to January 17, 2014, but is refinanced through an SRF assistance agreement executed on or after January 17, 2014 and prior to October 1, 2014, AIS requirements will apply to all construction that occurs on or after January 17, 2014, through completion of construction, unless, as is likely, engineering plans and specifications were approved by a responsible state agency prior to January 17, 2014. There is no retroactive application of the AIS requirements where a refinancing occurs for a project that has completed construction prior to January 17, 2014.

10) Do the AIS requirements apply to any other EPA programs, besides the SRF program, such as the Tribal Set-aside grants or grants to the Territories and DC?

No, the AIS requirement only applies to funds made available by a State water pollution control revolving fund as authorized by title VI of the Federal Water Pollution Control Act (33 U.S.C. 1381 et seq.) or made available by a drinking water treatment revolving loan fund as authorized by section 1452 of the Safe Drinking Water Act (42 U.S.C. 300j-12)

Covered Iron and Steel Products

11) What is an iron or steel product?

For purposes of the CWSRF and DWSRF projects that must comply with the AIS requirement, an iron or steel product is one of the following made primarily of iron or steel that is permanently incorporated into the public water system or treatment works:

- Lined or unlined pipes or fittings;
- Manhole Covers;
- Municipal Castings (defined in more detail below);
- Hydrants;
- Tanks;
- Flanges;
- Pipe clamps and restraints;
- Valves;
- Structural steel (defined in more detail below);
- Reinforced precast concrete; and
- Construction materials (defined in more detail below).

12) What does the term ‘primarily iron or steel’ mean?

‘Primarily iron or steel’ places constraints on the list of products above. For one of the listed products to be considered subject to the AIS requirements, it must be made of greater than 50% iron or steel, measured by cost. The cost should be based on the material costs.

13) Can you provide an example of how to perform a cost determination?

For example, the iron portion of a fire hydrant would likely be the bonnet, body and shoe, and the cost then would include the pouring and casting to create those components. The other material costs would include non-iron and steel internal workings of the fire hydrant (i.e., stem, coupling, valve, seals, etc). However, the assembly of the internal workings into the hydrant body would not be included in this cost calculation. If one of the listed products is not made primarily of iron or steel, United States (US) provenance is not required. An exception to this definition is reinforced precast concrete, which is addressed in a later question.

14) If a product is composed of more than 50% iron or steel, but is not listed in the above list of items, must the item be produced in the US? Alternatively, must the iron or steel in such a product be produced in the US?

The answer to both question is no. Only items on the above list must be produced in the US. Additionally, the iron or steel in a non-listed item can be sourced from outside the US.

15) What is the definition of steel?

Steel means an alloy that includes at least 50 percent iron, between .02 and 2 percent carbon, and may include other elements. Metallic elements such as chromium, nickel, molybdenum, manganese, and silicon may be added during the melting of steel for the purpose of enhancing properties such as corrosion resistance, hardness, or strength. The definition of steel covers carbon steel, alloy steel, stainless steel, tool steel and other specialty steels.

16) What does ‘produced in the United States’ mean?

Production in the United States of the iron or steel products used in the project requires that all manufacturing processes, including application of coatings, must take place in the United States, with the exception of metallurgical processes involving refinement of steel additives. All manufacturing processes includes processes such as melting, refining, forming, rolling, drawing, finishing, fabricating and coating. Further, if a domestic iron and steel product is taken out of the US for any part of the manufacturing process, it becomes foreign source material. However, raw materials such as iron ore, limestone and iron and steel scrap are not covered by the AIS requirement, and the material(s), if any, being applied as a coating are similarly not covered. Non-iron or steel components of an iron and steel product may come from non-US sources. For example, for products such as valves and hydrants, the individual non-iron and steel components

do not have to be of domestic origin.

17) Are the raw materials used in the production of iron or steel required to come from US sources?

No. Raw materials, such as iron ore, limestone, scrap iron, and scrap steel, can come from non-US sources.

18) If an above listed item is primarily made of iron or steel, but is only at the construction site temporarily, must such an item be produced in the US?

No. Only the above listed products made primarily of iron or steel, permanently incorporated into the project must be produced in the US. For example trench boxes, scaffolding or equipment, which are removed from the project site upon completion of the project, are not required to be made of U.S. Iron or Steel.

19) What is the definition of ‘municipal castings’?

Municipal castings are cast iron or steel infrastructure products that are melted and cast. They typically provide access, protection, or housing for components incorporated into utility owned drinking water, storm water, wastewater, and surface infrastructure. They are typically made of grey or ductile iron, or steel. Examples of municipal castings are:

- Access Hatches;
- Ballast Screen;
- Benches (Iron or Steel);
- Bollards;
- Cast Bases;
- Cast Iron Hinged Hatches, Square and Rectangular;
- Cast Iron Riser Rings;
- Catch Basin Inlet;
- Cleanout/Monument Boxes;
- Construction Covers and Frames;
- Curb and Corner Guards;
- Curb Openings;
- Detectable Warning Plates;
- Downspout Shoes (Boot, Inlet);
- Drainage Grates, Frames and Curb Inlets;
- Inlets;
- Junction Boxes;
- Lampposts;
- Manhole Covers, Rings and Frames, Risers;

Meter Boxes;
Service Boxes;
Steel Hinged Hatches, Square and Rectangular;
Steel Riser Rings;
Trash receptacles;
Tree Grates;
Tree Guards;
Trench Grates; and
Valve Boxes, Covers and Risers.

20) What is ‘structural steel’?

Structural steel is rolled flanged shapes, having at least one dimension of their cross-section three inches or greater, which are used in the construction of bridges, buildings, ships, railroad rolling stock, and for numerous other constructional purposes. Such shapes are designated as wide-flange shapes, standard I-beams, channels, angles, tees and zees. Other shapes include H-piles, sheet piling, tie plates, cross ties, and those for other special purposes.

21) What is a ‘construction material’ for purposes of the AIS requirement?

Construction materials are those articles, materials, or supplies made primarily of iron and steel, that are permanently incorporated into the project, not including mechanical and/or electrical components, equipment and systems. Some of these products may overlap with what is also considered “structural steel”. This includes, but is not limited to, the following products: wire rod, bar, angles, concrete reinforcing bar, wire, wire cloth, wire rope and cables, tubing, framing, joists, trusses, fasteners (i.e., nuts and bolts), welding rods, decking, grating, railings, stairs, access ramps, fire escapes, ladders, wall panels, dome structures, roofing, ductwork, surface drains, cable hanging systems, manhole steps, fencing and fence tubing, guardrails, doors, and stationary screens.

22) What is not considered a ‘construction material’ for purposes of the AIS requirement?

Mechanical and electrical components, equipment and systems are not considered construction materials. Mechanical equipment is typically that which has motorized parts and/or is powered by a motor. Electrical equipment is typically any machine powered by electricity and includes components that are part of the electrical distribution system.

The following examples (including their appurtenances necessary for their intended use and operation) are NOT considered construction materials: pumps, motors, gear reducers, drives (including variable frequency drives (VFDs)), electric/pneumatic/manual accessories used to operate valves (such as electric valve actuators), mixers, gates, motorized screens (such as traveling screens), blowers/aeration equipment, compressors, meters, sensors, controls and switches, supervisory control and data acquisition (SCADA), membrane bioreactor systems, membrane filtration systems, filters, clarifiers and clarifier mechanisms, rakes, grinders, disinfection systems, presses (including belt presses), conveyors, cranes, HVAC (excluding ductwork), water heaters,

heat exchangers, generators, cabinetry and housings (such as electrical boxes/enclosures), lighting fixtures, electrical conduit, emergency life systems, metal office furniture, shelving, laboratory equipment, analytical instrumentation, and dewatering equipment.

23) If the iron or steel is produced in the US, may other steps in the manufacturing process take place outside of the US, such as assembly?

No. Production in the US of the iron or steel used in a listed product requires that all manufacturing processes must take place in the United States, except metallurgical processes involving refinement of steel additives.

24) What processes must occur in the US to be compliant with the AIS requirement for reinforced precast concrete?

While reinforced precast concrete may not be at least 50% iron or steel, in this particular case, the reinforcing bar and wire must be produced in the US and meet the same standards as for any other iron or steel product. Additionally, the casting of the concrete product must take place in the US. The cement and other raw materials used in concrete production are not required to be of domestic origin.

If the reinforced concrete is cast at the construction site, the reinforcing bar and wire are considered to be a construction material and must be produced in the US.

Compliance

25) How should an assistance recipient document compliance with the AIS requirement?

In order to ensure compliance with the AIS requirement, specific AIS contract language must be included in each contract, starting with the assistance agreement, all the way down to the purchase agreements. Sample language for assistance agreements and contracts can be found in Appendix 3 and 4.

EPA recommends the use of a step certification process, similar to one used by the Federal Highway Administration. The step certification process is a method to ensure that producers adhere to the AIS requirement and assistance recipients can verify that products comply with the AIS requirement. The process also establishes accountability and better enables States to take enforcement actions against violators.

Step certification creates a paper trail which documents the location of the manufacturing process involved with the production of steel and iron materials. A step certification is a process under which each handler (supplier, fabricator, manufacturer,

processor, etc) of the iron and steel products certifies that their step in the process was domestically performed. Each time a step in the manufacturing process takes place, the manufacturer delivers its work along with a certification of its origin. A certification can be quite simple. Typically, it includes the name of the manufacturer, the location of the manufacturing facility where the product or process took place (not its headquarters), a description of the product or item being delivered, and a signature by a manufacturer's responsible party. Attached, as Appendix 5, are sample certifications. These certifications should be collected and maintained by assistance recipients.

Alternatively, the final manufacturer that delivers the iron or steel product to the worksite, vendor, or contractor, may provide a certification asserting that all manufacturing processes occurred in the US. While this type of certification may be acceptable, it may not provide the same degree of assurance. Additional documentation may be needed if the certification is lacking important information. Step certification is the best practice.

26) How should a State ensure assistance recipients are complying with the AIS requirement?

In order to ensure compliance with the AIS requirement, States SRF programs must include specific AIS contract language in the assistance agreement. Sample language for assistance agreements can be found in Appendix 3.

States should also, as a best practice, conduct site visits of projects during construction and review documentation demonstrating proof of compliance which the assistance recipient has gathered.

27) What happens if a State or EPA finds a non-compliant iron and/or steel product permanently incorporated in the project?

If a potentially non-compliant product is identified, the State should notify the assistance recipient of the apparent unauthorized use of the non-domestic component, including a proposed corrective action, and should be given the opportunity to reply. If unauthorized use is confirmed, the State can take one or more of the following actions: request a waiver where appropriate; require the removal of the non-domestic item; or withhold payment for all or part of the project. Only EPA can issue waivers to authorize the use of a non-domestic item. EPA may use remedies available to it under the Clean Water Act, the Safe Drinking Water Act, and 40 CFR part 31 grant regulations, in the event of a violation of a grant term and condition.

It is recommended that the State work collaboratively with EPA to determine the appropriate corrective action, especially in cases where the State is the one who identifies the item in noncompliance or there is a disagreement with the assistance recipient.

If fraud, waste, abuse, or any violation of the law is suspected, the Office of Inspector General (OIG) should be contacted immediately. The OIG can be reached at 1-888-546-8740 or OIG_Hotline@epa.gov. More information can be found at this website: <http://www.epa.gov/oig/hotline.htm>.

28) How do international trade agreements affect the implementation of the AIS requirements?

The AIS provision applies in a manner consistent with United States obligations under international agreements. Typically, these obligations only apply to direct procurement by the entities that are signatories to such agreements. In general, SRF assistance recipients are not signatories to such agreements, so these agreements have no impact on this AIS provision. In the few instances where such an agreement applies to a municipality, that municipality is under the obligation to determine its applicability and requirements and document the actions taken to comply for the State.

Waiver Process

The statute permits EPA to issue waivers for a case or category of cases where EPA finds (1) that applying these requirements would be inconsistent with the public interest; (2) iron and steel products are not produced in the US in sufficient and reasonably available quantities and of a satisfactory quality; or (3) inclusion of iron and steel products produced in the US will increase the cost of the overall project by more than 25 percent.

In order to implement the AIS requirements, EPA has developed an approach to allow for effective and efficient implementation of the waiver process to allow projects to proceed in a timely manner. The framework described below will allow States, on behalf of the assistance recipients, to apply for waivers of the AIS requirement directly to EPA Headquarters. Only waiver requests received from states will be considered. Pursuant to the Act, EPA has the responsibility to make findings as to the issuance of waivers to the AIS requirements.

Definitions

The following terms are critical to the interpretation and implementation of the AIS requirements and apply to the process described in this memorandum:

Reasonably Available Quantity: The quantity of iron or steel products is available or will be available at the time needed and place needed, and in the proper form or specification as specified in the project plans and design.

Satisfactory Quality: The quality of iron or steel products, as specified in the project plans and designs.

Assistance Recipient: A borrower or grantee that receives funding from a State CWSRF or DWSRF program.

Step-By-Step Waiver Process

Application by Assistance Recipient

Each local entity that receives SRF water infrastructure financial assistance is required by section 436 of the Act to use American made iron and steel products in the construction of its project. However, the recipient may request a waiver. Until a waiver is granted by EPA, the AIS requirement stands, except as noted above with respect to municipalities covered by international agreements.

The waiver process begins with the SRF assistance recipient. In order to fulfill the AIS requirement, the assistance recipient must in good faith design the project (where applicable) and solicit bids for construction with American made iron and steel products. It is essential that the assistance recipient include the AIS terms in any request for proposals or solicitations for bids, and in all contracts (see Appendix 3 for sample construction contract language). The assistance recipient may receive a waiver at any point before, during, or after the bid process, if one or more of three conditions is met:

1. Applying the American Iron and Steel requirements of the Act would be inconsistent with the public interest;
2. Iron and steel products are not produced in the United States in sufficient and reasonably available quantities and of a satisfactory quality; or
3. Inclusion of iron and steel products produced in the United States will increase the cost of the overall project by more than 25 percent.

Proper and sufficient documentation must be provided by the assistance recipient. A checklist detailing the types of information required for a waiver to be processed is attached as Appendix 1.

Additionally, it is strongly encouraged that assistance recipients hold pre-bid conferences with potential bidders. A pre-bid conference can help to identify iron and steel products needed to complete the project as described in the plans and specifications that may not be available from domestic sources. It may also identify the need to seek a waiver prior to bid, and can help inform the recipient on compliance options.

In order to apply for a project waiver, the assistance recipient should email the request in the form of a Word document (.doc) to the State SRF program. It is strongly recommended that the State designate a single person for all AIS communications. The State SRF designee will review the application for the waiver and determine whether the necessary information has been included. Once the waiver application is complete, the State designee will forward the application to the EPA for review.

Evaluation by EPA

After receiving an application for waiver of the AIS requirements, EPA Headquarters will publish the request on its website for 15 days and receive informal comment. EPA Headquarters will then use the checklist in Appendix 2 to determine whether the application properly and adequately documents and justifies the statutory basis cited for the waiver – that it is quantitatively and qualitatively sufficient – and to

determine whether or not to grant the waiver.

In the event that EPA finds that adequate documentation and justification has been submitted, the Administrator may grant a waiver to the assistance recipient. EPA will notify the State designee that a waiver request has been approved or denied as soon as such a decision has been made. Granting such a waiver is a three-step process:

1. Posting – After receiving an application for a waiver, EPA is required to publish the application and all material submitted with the application on EPA’s website for 15 days. During that period, the public will have the opportunity to review the request and provide informal comment to EPA. The website can be found at: http://water.epa.gov/grants_funding/aisrequirement.cfm
2. Evaluation – After receiving an application for waiver of the AIS requirements, EPA Headquarters will use the checklist in Appendix 2 to determine whether the application properly and adequately documents and justifies the statutory basis cited for the waiver – that it is quantitatively and qualitatively sufficient – and to determine whether or not to grant the waiver.
3. Signature of waiver approval by the Administrator or another agency official with delegated authority – As soon as the waiver is signed and dated, EPA will notify the State SRF program, and post the signed waiver on our website. The assistance recipient should keep a copy of the signed waiver in its project files.

Public Interest Waivers

EPA has the authority to issue public interest waivers. Evaluation of a public interest waiver request may be more complicated than that of other waiver requests so they may take more time than other waiver requests for a decision to be made. An example of a public interest waiver that might be issued could be for a community that has standardized on a particular type or manufacturer of a valve because of its performance to meet their specifications. Switching to an alternative valve may require staff to be trained on the new equipment and additional spare parts would need to be purchased and stocked, existing valves may need to be unnecessarily replaced, and portions of the system may need to be redesigned. Therefore, requiring the community to install an alternative valve would be inconsistent with public interest.

EPA also has the authority to issue a public interest waiver that covers categories of products that might apply to all projects.

EPA reserves the right to issue national waivers that may apply to particular classes of assistance recipients, particular classes of projects, or particular categories of iron or steel products. EPA may develop national or (US geographic) regional categorical waivers through the identification of similar circumstances in the detailed justifications presented to EPA in a waiver request or requests. EPA may issue a national waiver based on policy decisions regarding the public's interest or a determination that a particular item is not produced domestically in reasonably available quantities or of a sufficient quality. In such cases, EPA may determine it is necessary to issue a national waiver.

If you have any questions concerning the contents of this memorandum, you may contact us, or have your staff contact Jordan Dorfman, Attorney-Advisor, State Revolving Fund Branch, Municipal Support Division, at dorfman.jordan@epa.gov or (202) 564-0614 or Kiri Anderer, Environmental Engineer, Infrastructure Branch, Drinking Water Protection Division, at anderer.kirsten@epa.gov or (202) 564-3134.

Attachments

Appendix 1: Information Checklist for Waiver Request

The purpose of this checklist is to help ensure that all appropriate and necessary information is submitted to EPA. EPA recommends that States review this checklist carefully and provide all appropriate information to EPA. This checklist is for informational purposes only and does not need to be included as part of a waiver application.

Items	✓	Notes
General • Waiver request includes the following information: — Description of the foreign and domestic construction materials — Unit of measure — Quantity — Price — Time of delivery or availability — Location of the construction project — Name and address of the proposed supplier — A detailed justification for the use of foreign construction materials • Waiver request was submitted according to the instructions in the memorandum • Assistance recipient made a good faith effort to solicit bids for domestic iron and steel products, as demonstrated by language in requests for proposals, contracts, and communications with the prime contractor		
Cost Waiver Requests • Waiver request includes the following information: — Comparison of overall cost of project with domestic iron and steel products to overall cost of project with foreign iron and steel products — Relevant excerpts from the bid documents used by the contractors to complete the comparison — Supporting documentation indicating that the contractor made a reasonable survey of the market, such as a description of the process for identifying suppliers and a list of contacted suppliers		
Availability Waiver Requests • Waiver request includes the following supporting documentation necessary to demonstrate the availability, quantity, and/or quality of the materials for which the waiver is requested: — Supplier information or pricing information from a reasonable number of domestic suppliers indicating availability/delivery date for construction materials — Documentation of the assistance recipient's efforts to find available domestic sources, such as a description of the process for identifying suppliers and a list of contacted suppliers. — Project schedule — Relevant excerpts from project plans, specifications, and permits indicating the required quantity and quality of construction materials • Waiver request includes a statement from the prime contractor and/or supplier confirming the non-availability of the domestic construction materials for which the waiver is sought • Has the State received other waiver requests for the materials described in this waiver request, for comparable projects?		

Appendix 2: HQ Review Checklist for Waiver Request

Instructions: To be completed by EPA. Review all waiver requests using the questions in the checklist, and mark the appropriate box as Yes, No or N/A. Marks that fall inside the shaded boxes may be grounds for denying the waiver. If none of your review markings fall into a shaded box, the waiver is eligible for approval if it indicates that one or more of the following conditions applies to the domestic product for which the waiver is sought:

1. The iron and/or steel products are not produced in the United States in sufficient and reasonably available quantities and of a satisfactory quality.
2. The inclusion of iron and/or steel products produced in the United States will increase the cost of the overall project by more than 25 percent.

Review Items	Yes	No	N/A	Comments
Cost Waiver Requests - Does the waiver request include the following information? - Comparison of overall cost of project with domestic iron and steel products to overall cost of project with foreign iron and steel products - Relevant excerpts from the bid documents used by the contractors to complete the comparison - A sufficient number of bid documents or pricing information from domestic sources to constitute a reasonable survey of the market - Does the Total Domestic Project exceed the Total Foreign Project Cost by more than 25%?				
Availability Waiver Requests - Does the waiver request include supporting documentation sufficient to show the availability, quantity, and/or quality of the iron and/or steel product for which the waiver is requested? - Supplier information or other documentation indicating availability/delivery date for materials - Project schedule - Relevant excerpts from project plans, specifications, and permits indicating the required quantity and quality of materials - Does supporting documentation provide sufficient evidence that the contractors made a reasonable effort to locate domestic suppliers of materials, such as a description of the process for identifying suppliers and a list of contacted suppliers? - Based on the materials delivery/availability date indicated in the supporting documentation, will the materials be unavailable when they are needed according to the project schedule? (By item, list schedule date and domestic delivery quote date or other relevant information) - Is EPA aware of any other evidence indicating the non-availability of the materials for which the waiver is requested? Examples include: - Multiple waiver requests for the materials described in this waiver request, for comparable projects in the same State - Multiple waiver requests for the materials described in this waiver request, for comparable projects in other States - Correspondence with construction trade associations indicating the non-availability of the materials - Are the available domestic materials indicated in the bid documents of inadequate quality compared those required by the project plans, specifications, and/or permits?				

Appendix 5: Sample Certifications

The following information is provided as a sample letter of **step** certification for AIS compliance. Documentation must be provided on company letterhead.

Date

Company Name

Company Address

City, State Zip

Subject: American Iron and Steel Step Certification for Project (XXXXXXXXXX)

I, (company representative), certify that the (melting, bending, coating, galvanizing, cutting, etc.) process for (manufacturing or fabricating) the following products and/or materials shipped or provided for the subject project is in full compliance with the American Iron and Steel requirement as mandated in EPA's State Revolving Fund Programs.

Item, Products and/or Materials:

1. XXXX
2. XXXX
3. XXXX

Such process took place at the following location:

If any of the above compliance statements change while providing material to this project we will immediately notify the prime contractor and the engineer.

Signed by company representative

The following information is provided as a sample letter of certification for AIS compliance. Documentation must be provided on company letterhead.

Date

Company Name

Company Address

City, State Zip

Subject: American Iron and Steel Certification for Project (XXXXXXXXXX)

I, (company representative), certify that the following products and/or materials shipped/provided to the subject project are in full compliance with the American Iron and Steel requirement as mandated in EPA's State Revolving Fund Programs.

Item, Products and/or Materials:

1. XXXX
2. XXXX
3. XXXX

Such process took place at the following location:

If any of the above compliance statements change while providing material to this project we will immediately notify the prime contractor and the engineer.

Signed by company representative

**American Iron & Steel (AIS) Requirement of the Consolidated Appropriations Act of 2014
(Public Law 113-76)**

Q&A Part 2

PRODUCT QUESTIONS

1. Q: Do all fasteners qualify for de minimis exemption?

A: No. There is no broad exemption for fasteners from the American Iron and Steel (AIS) requirements. Significant fasteners used in SRF projects are not subject to the de minimis waiver for projects and must comply with the AIS requirements. Significant fasteners include fasteners produced to industry standards (e.g., ASTM standards) and/or project specifications, special ordered or those of high value. When bulk purchase of unknown-origin fasteners that are of incidental use and small value are used on a project, they may fall under the national de minimis waiver for projects. The list of potential items could be varied, such as big-box/hardware-store-variety screws, nails, and staples. The key characteristics of the items that may qualify for the de minimis waiver would be items that are incidental to the project purpose (such as drywall screws) and not significant in value or purpose (such as common nails or brads).

EPA also clarifies that minor components of two listed products – valves and hydrants -- may not need to meet the AIS requirements if the minor components compromise a very small quantity of minor, low-cost fasteners that are of unknown origin.

2. Q: Does PCCP pipe have to be domestically produced?

A: Yes. Pre-stressed concrete cylinder pipe (PCCP) or other similar concrete cylinder pipes would be comparable to pre-cast concrete which is specifically listed in the Consolidated Appropriations Act of 2014 as a product subject to the AIS requirement.

3. Q: If the iron or steel is made from recycled metals will the vendor/supplier have to provide a certification document certifying that the recycled metals are domestically produced?

A: No. Recycled source materials used in the production of iron and steel products do not have to come from the U.S. Iron or steel scrap, for instance, are considered raw materials that may come from anywhere. While certification is not required for the raw material, EPA does recommend that additional final processing of iron and steel be certified to have occurred in the U.S.

4. Q: Do tanks used for filtration systems, if delivered to the construction site separately and then filled with filtration media onsite, have to be domestically produced?

A: No. Tanks that are specifically designed to be filters, or as parts of a filtration system, do not have to be domestically produced because these parts are no longer simply tanks, even if the filter media has not been installed and will be installed at the project site, as is customary to do for shipping purposes. These parts have only one purpose which is to be housing for filters and cannot be used in another fashion.

5. Q: Can a recipient use non-domestic flanged pipe?

A: No. While the Consolidated Appropriations Act of 2014 does not specifically mention flanged pipe, since it does mention both pipe and flanges, both products would need to be domestically produced. Therefore, flanged pipe would also need to be domestically produced.

6. Q: Can a recipient use non-domestic couplings, expansion joints, and other similar pipe connectors?

A: No. These products would be considered specialty fittings, due to their additional functionality, but still categorized under the larger “fitting” categorization. Fittings are defined as a material that joins pipes together or connects to a pipe (AWWA, The Drinking Water Dictionary, 2000). Therefore, these products must comply with the AIS requirements and be produced domestically.

7. Q: Can a recipient use non-domestic service saddles and tapping sleeves?

A: No. These products are necessary for pipe repair, to tap a water main, or to install a service or house connection. Therefore, they are included under the larger “pipe restraint” category which is a specifically identified product subject to the domestic preference in the Consolidated Appropriations Act of 2014.

8. Q: The AIS guidance does not appear to cover reused items (i.e., existing pipe fittings, used storage tanks, reusing existing valves). How should reused items be addressed?

A: The AIS guidance does not address reuse of items. Reuse of items that would otherwise be covered by AIS is acceptable provided that the item(s) was originally purchased prior to January 17, 2014, the reused item(s) is not substantially altered from original form/function, and any restoration work that may be required does not include the replacement or addition of foreign iron or steel replacement parts. EPA recommends keeping a log of these reused items by including them on the assistance recipient’s de minimis list, and stating therein that these items are reused products. The donation of new items (such as a manufacturer waiving cost for certain delivered items because of concerns regarding the origin of a new product) is not, however, considered reuse.

9. Q: What does “time needed” mean in the AIS guidance, in reference to the definition of “Reasonably Available Quantity”?

A: For considering whether a product would meet reasonably available quantity, “time needed” is based on the construction schedule. If the item is delayed and there is substantial impact on the overall construction schedule, this would not be according to the “time needed.”

10. Q: If a product is not specifically included on the list of AIS covered products, must it comply with AIS?

A: Possibly. The AIS requirements include a list of specifically covered products, one of which is construction materials, a broad category of potential products. For construction materials, EPA’s AIS guidance includes a set of example items that it considers construction materials composed primarily of iron and steel and covered by the Act. This example list in the guidance is not an all-inclusive list of potential construction materials. However, the guidance also includes a list of items that EPA specifically does not consider construction materials, generally those of electrical or complex-mechanical nature. If a product is similar to the ones in the non-construction material list (and it is also not specifically listed by the Act), it is not a construction material. For all other items specifically included in the Act, coverage is generally self-evident.

11. Q: If a listed iron and steel product is used as a part for an assembled product that is non-domestic, do the AIS requirements apply?

A: AIS requirements only apply to the final product as delivered to the work site and incorporated into the project. Other assemblies, such as a pumping assembly or a reverse osmosis package plant, are distinct products not listed and do not need to be made in the U.S. or composed of all U.S. parts. Therefore, for the case of a non-covered product used in a larger non-domestic assembly, the components, even if specifically listed in the Consolidated Appropriations Act, do not have to be domestically produced.

12. Q: Is cast iron excluded from the AIS requirements?

A: No. Cast iron products that fall under the definition of iron and steel products must comply with the AIS requirements.

13. Q: The guidance states that “construction materials” do not include mechanical equipment, but then identifies ductwork as a construction material. Please clarify.

A: Ductwork is not mechanical equipment, therefore it is considered a “construction material” and must comply with the AIS requirements.

14. Q: Do “meters” mentioned in EPA’s guidance as non-construction materials include both flow meters and water meters?

A: Yes. “Meters” includes any type of meter, including: flow meters, wholesale meters, and water meters/service connections.

15. Q: Must coiled steel be domestic?

A: Yes. Coiled steel is an intermediate product used in the production of steel pipe and must come from a U.S. source or subject to a waiver in order to comply with the AIS requirements.

16. Q: Are pig iron, direct reduced iron (DRI), and ingot considered raw materials?

A: No. These are considered intermediate products used in the production of iron or steel and must come from a U.S. source or subject to a waiver in order to comply with the AIS requirements.

17. Q: Can assistance recipients rely on a marking that reads, “Made in the USA,” as evidence that all processes took place in the U.S.?

A: No. This designation is not consistent with our requirements that all manufacturing processes of iron and steel products must take place in the U.S.

18. Q: When determining what constitutes a product made “primarily” of iron or steel, who makes this determination?

A: The manufacturer will show if its product qualifies as primarily made of iron or steel. The recipient should expect the manufacturer to provide documentation/ certification that its product is AIS compliant.

19. Q: Do aerators need to be produced domestically in order to comply with AIS?

A: No. Aerators, similar to pumps, are mechanical equipment that do not need to meet the AIS requirements. “Blowers/aeration equipment, compressors” are listed in EPA’s guidance as non-construction materials.

20. Q: Are Sluice and Slide Gates considered valves?

A: No. Valves are products that are generally encased / enclosed with a body, bonnet, and stem. Examples include enclosed butterfly, ball, globe, piston, check, wedge, and gate valves. Furthermore, “gates” (meaning sluice, slide or weir gates) are listed in EPA’s guidance as non-construction materials.

AIS PROCESS QUESTIONS

21. Q: Will notices of waiver applications be published in the federal register?

A: No. Applications for waivers will be published on EPA’s website (http://water.epa.gov/grants_funding/aisrequirement.cfm). EPA will provide 15 days for open public comment, as noted on the website.

22. Q: Will states be collecting the step certification paper trail, as presented in the AIS guidance?

A. No. Assistance recipients must maintain documentation of compliance with AIS. EPA recommends use of the step certification process. This process is a best practice and traces all manufacturing of iron and steel products to the U.S. If the process is used, the state does not have to collect the documentation. The documents must be kept by the assistance recipient and reviewed by the state during project reviews.

23. Q: Why is it considered a best practice for states to conduct site visits, when it is the assistance recipient's responsibility to meet the AIS requirements?

A: It is both the assistance recipient's and the state's responsibility to ensure compliance with the AIS requirements. The state is the recipient of a federal grant and must comply with all grant conditions, including a condition requiring that the AIS requirements be adhered to. Therefore, it is recommended that states conduct site visits of projects during construction and review documentation demonstrating the assistance recipient's proof of compliance.

24. Q: Please further define the state's role in the waiver process.

A: The state's role in the waiver process is to review any waiver requests submitted to the state in order to ensure that all necessary information has been provided by the assistance recipient prior to forwarding the request to EPA. If a state finds the request lacking, the state should work with the assistance recipient to help obtain complete information.

25. Q: How much time does EPA have to evaluate the waiver during the evaluation step?

A: At a minimum, EPA is required to provide 15 days for open public comment. There is no specific deadline or time limit for EPA to review waiver requests. Each waiver request will come with its own specific details and circumstances and may require a different amount of time for review and analysis. For example, public interest waivers in general may take longer to review than availability waivers which are typically more straightforward. However, EPA understands that construction may be delayed while waiting for a waiver and will make every effort to review and issue decisions on waiver requests in a timely manner.

PROJECT QUESTIONS

26. Q: What if a project is funded by another funding entity (i.e., United States Department of Agriculture – Rural Development) where AIS is not required and begins construction after January 17, 2014 but then applies to the SRF to refinance the project? Are they ineligible?

A: The project is not ineligible. AIS requirements will apply to any construction that occurs after the assistance agreement is signed, through the end of construction. If construction is complete, there is no retroactive application of the AIS requirements.

27. Q: If the assistance recipient can demonstrate through market research that the AIS requirement will exceed the 25 percent cost threshold, is the entire project exempt from the AIS requirement?

A: If the waiver application shows that the inclusion of American iron and steel products causes the entire cost of the project to increase by more the 25 percent, a waiver may be granted for the entirety of the project.

28. Q: Can the recipient use non-SRF funds to pay for the non-compliant item.

A: No. It is not an acceptable to use non-SRF funds to pay for a non-compliant item. The Consolidated Appropriations Act of 2014 requires that all iron and steel products, no matter the source of funding, must be made in the U.S. if SRF funds are used in the project.

29. Q: What constitutes “satisfactory quality” as defined in the AIS guidance, in reference to the availability waiver process.

A: “Satisfactory quality” means the product meets the project design specifications. A waiver may be granted if a recipient determines that the project plans and design would be compromised because there are no American made products available that meet the project design specifications.

30. Q: The guidance states that the AIS requirement applies to any project “funded in whole or in part” by an SRF. Where is this in the Act?

A: The Act states that, “None of the funds made available by a ... [State SRF program] ... shall be used for a project for the construction, alteration, maintenance, or repair of a public water system or treatment works unless all of the iron and steel products used in the project are produced in the United States.” This sentence clearly states that no SRF program may use its funds for a project unless all of the iron and steel products used in the project are made in the U.S. This is true even if only \$1 of SRF funding is used in the project.

31. Q: There is always an expectation on the part of an assistance recipient that the construction phase of a planning and/or design only loan will be funded through the SRF. If the original planning and/or design only loan was executed prior to a January 17, 2014, does this mean the entire project will be exempt from the AIS requirement?

A: If the original loan includes construction, and was executed prior to January 17, 2014, then the AIS provision does not apply to the project. If the original loan was only for planning and/or design, then a written commitment or documented “expectation” is needed to show exemption from the

requirements. Appearance on a priority list in an Intended Use Plan along with written reasonable assurance from the state that the recipient will receive SRF funding for project construction could provide sufficient evidence of “expectation of funding”.

- 32. Q: What if there has been a change order or redesign requiring new plans and specifications to be approved and they were approved after January 17, 2014: does the project now have to comply with AIS?**

A: In most cases, no. Change orders are typically small enough changes that the original plan and specification date will still hold true. For example, if a pipe alignment has to be changed for a block or two due to unforeseen conditions, but new plans and specifications had to be submitted for this section of the project, then that could be considered a minor change. However, if there has been a major redesign, perhaps the whole project had to be redesigned starting from scratch, then the new plans and specification approval date would apply.

- 33. Q: What if the bids on a project with plans and specifications approved before January 17, 2014 but the loan is signed after January 17, 2014 come in low, and there is significant funding remaining in the loan agreement, so the community designs a second project with the remaining funds: does that project have to comply with the AIS requirements?**

A: If the second project is closely related in purpose, place and time to the first project, then the second project would be exempt from the AIS requirements. It is the assistance recipient’s responsibility (with state oversight) to show that a project is closely related, or not, in purpose, place and time.

- 34. Q: What if the assistance agreement was signed after January 17, 2014, state approval of plans for the first phase of the project was in place prior to January 17, 2014, but state approval of the plans for the second phase of the project was received after January 17, 2014?**

A: In such a case, the AIS provision would not apply to the first phase of the project. If the second phase of the project is considered the same project as the first phase, due to its close relation in purpose, place and time, the entire project may be exempt. It is the assistance recipient’s responsibility (with state oversight) to show that phases of a project is closely related, or not, in purpose, place and time.

- 35. Q: Do products purchased through procurement-only contracts have to be comply with AIS?**

A: Yes. For projects funded by SRF, the products procured under any form of contract must comply with AIS. A procurement-only contract generally involves the bulk purchase of common items (such as pipe, concrete, and/or pumps) of independent timing from a set of planned projects. If products which are purchased through a procurement-only contract are being installed under another contract, the procurement-only contract would probably not be considered a separate project in purpose, place and time; and therefore, would have to comply with the AIS requirements.

March 2015

American Iron & Steel Requirement for the Clean Water and Drinking Water State Revolving Funds

Q&A Part 3

*For CWSRF and DWSRF: On **January 17, 2014**, Public Law 113-76, the "Consolidated Appropriations Act, 2014," was enacted and included an American Iron and Steel requirement for the Clean Water and Drinking Water State Revolving Fund programs through the end of fiscal year 2014. Since then, the AIS requirement has continued for both programs, but through different statutes, with a few changes as described in the questions and answers provided below.*

*For CWSRF: On **June 10, 2014**, the Water Resources Reform and Development Act amended the Clean Water Act to include permanent requirements for the use of AIS products in CWSRF assistance agreements. Section 608 of the CWA now contains requirements for AIS that repeat those of the Consolidated Appropriations Act, 2014. All CWSRF assistance agreements must comply with Section 608 of the CWA for implementation of the permanent AIS requirement.*

*For DWSRF: On **December 16, 2014**, the President signed Public Law 113-235, the "Consolidated and Further Continuing Appropriations Act, 2015," which provides fiscal year 2015 full-year appropriations through September 30, 2015. This law continues the requirement for the use of AIS products in DWSRF assistance agreements through September 30, 2015.*

CWSRF PROGRAM

- 1. Q: The Water Resources Reform and Development Act amended the Clean Water Act to include permanent requirements for the use of AIS for CWSRF funded assistance agreements. Does the CWA include an exemption for plans and specifications approved prior to the enactment of the legislation similar to the exemption included in the Consolidated Appropriations Act (CAA) 2014?**

A: Yes. The WRRDA amendment to the CWA, which included AIS requirements, included a similar exemption as the CAA 2014. For any CWSRF assistance agreement signed on or after October 1, 2014, if the plans and specifications were approved prior to June 10, 2014 (the enactment of WRRDA), then the project is exempt from AIS requirements. For assistance agreements signed prior to October 1, 2014, the previous dates in the CAA 2014 apply (see March 20, 2014, AIS guidance document).

If a project does not require approved engineering plans and specifications, the bid advertisement date will count in lieu of the plans and specifications approval date for purposes of this exemption in Section 608 (f).

The following table summarizes AIS exemptions based on the plans and specifications approval date for CWSRF funded projects.

3/16/2015

CWSRF AIS Project Exemption Based on Plans and Specifications Approval Date		
<u>Assistance Agreement Signed:</u>	<u>Exempt from AIS if Plans and Specifications Were Approved Before:</u>	<u>Basis for Exemption:</u>
1/17/2014 through 9/30/2014	4/15/2014	- Consolidated Appropriations Act 2014 - National waiver signed 4/15/2014*
On or after 10/1/2014	6/10/2014	Clean Water Act Section 608

** To be covered by the national waiver, the plans and specifications had to be submitted to the state prior to 1/17/2014*

2. Q: Does the AIS requirement apply to refinanced CWSRF projects?

A: Yes, in some cases. If a project began construction, financed from a non-CWSRF source prior to June 10, 2014, but is refinanced through a CWSRF assistance agreement executed on or after October 1, 2014, AIS requirements will apply to all construction that occurs on or after June 10, 2014, through completion of construction, unless engineering plans and specifications were approved by the responsible state agency prior to June 10, 2014. For CWSRF projects funded on or after October 1, 2014, there is no retroactive application of the AIS requirements where a refinancing occurs for a project that has completed construction prior to June 10, 2014.

DWSRF PROGRAM

3. Q: The Consolidated and Further Continuing Appropriations Act 2015 continues the AIS requirements for DWSRF funded assistance agreements. Does the Act include an exemption for plans and specifications approved prior to the enactment of the legislation, similar to the exemption included in the Consolidated Appropriations Act (CAA) 2014?

A: Yes. The Consolidated and Further Continuing Appropriations Act 2015 includes a similar exemption as the CAA 2014. For any assistance agreement signed on or after December 16, 2014 (the enactment of the Act), if the plans and specifications were approved prior to December 16, 2014, then the project is exempt from the AIS requirements. For assistance agreements signed prior to December 16, 2014, the previous dates in the CAA 2014 apply (see March 20, 2014 AIS guidance document).

If a project does not require approved engineering plans and specifications, the bid advertisement date will count in lieu of the plans and specifications approval date for purposes of the exemption in Section 424(f).

3/16/2015

4. Q: Do DWSRF assistance agreements signed during the time period between September 30, 2014, and December 16, 2014, still have to comply with the AIS requirements?

A: Yes. The Continuing Appropriations Resolution 2015 was signed on September 19, 2014, which extended funding for the DWSRF with the same conditions that were made applicable by the language in the Fiscal Year 2014 appropriations, including the requirement for the use of American Iron and Steel products in projects receiving financial assistance from the DWSRF. Therefore, all assistance agreements starting October 1, 2014, through the enactment of the Consolidated and Further Continuing Appropriations Act 2015 (signed December 16, 2014), must include the AIS requirements. However, if the plans and specifications for any of these projects were approved prior to April 15, 2014 (the date the national waiver was signed), then the project is exempt from the AIS requirements.

The following table summarizes AIS exemptions based on the plans and specifications approval date for DWSRF funded projects.

DWSRF AIS Project Exemption Based on Plans and Specifications Approval Date		
<u>Assistance Agreement Signed:</u>	<u>Exempt from AIS if Plans and Specifications Were Approved Before:</u>	<u>Basis for Exemption:</u>
1/17/2014 through 9/30/2014	4/15/2014	- Consolidated Appropriations Act 2014 - National waiver signed 4/15/2014*
10/1/2014 through 12/15/2014	4/15/2014	- Continuing Appropriations Resolution 2015 (continued CAA 2014 requirements)** - National waiver signed 4/15/2014*
12/16/2014 through 9/30/2015	12/16/2014	Consolidated and Further Continuing Appropriations Act 2015

* To be covered by the national waiver, the plans and specifications had to be submitted to the state prior to 1/17/2014

** Following the first continuing resolution, there were two additional CRs to fill the gap between 12/11/2014 and 12/16/2014

5. Q: Does the AIS requirement apply to refinanced DWSRF projects?

A: Yes, in some cases. If a project began construction, financed from a non-DWSRF source prior to December 16, 2014, but is refinanced through a DWSRF assistance agreement executed on or after December 16, 2014, AIS requirements will apply to all construction that occurs on or after December 16, 2014, through completion of construction, unless engineering plans and

3/16/2015

specifications were approved by the responsible state agency prior to December 16, 2014. For DWSRF projects funded on or after December 16, 2014, there is no retroactive application of the AIS requirements where a refinancing occurs for a project that has completed construction prior to December 16, 2014.

BOTH CWSRF AND DWSRF PROGRAMS

6. **Q: If a coating is applied to the external surface of a domestic iron or steel component, and the application takes place outside of the United States, would the product be compliant under the AIS requirements?**

A: Yes. The product would still be considered a compliant product under AIS requirements. Any coating processes that are applied to the external surface of iron and steel components that would otherwise be AIS compliant would not disqualify the product from meeting the AIS requirements regardless of where the coating processes occur, provided that final assembly of the product occurs in the United States.

The exemption above only applies to coatings on the *external surface* of iron and steel components. It does not apply to coatings or linings on internal surfaces of iron and steel products, such as the lining of lined pipes. All manufacturing processes for lined pipes, including the application of pipe lining, must occur in the United States for the product to be compliant with AIS requirements.



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OFFICE OF WAIRM

DECISION MEMORANDUM

SUBJECT: De Minimis Waiver of Section 436 of P.L. 113-76, Consolidated Appropriations Act (CAA), 2014

FROM: Nancy K. Stoner
Acting Assistant Administrator

The EPA is hereby granting a nationwide waiver pursuant to the "American Iron and Steel (AIS)" requirements of P.L. 113-76, Consolidated Appropriations Act, 2014 (Act), section 436 under the authority of Section 436(b)(1) (public interest waiver) for de minimis incidental components of eligible water infrastructure projects. This action permits the use of products when they occur in de minimis incidental components of such projects funded by the Act that may otherwise be prohibited under section 436(a). Funds used for such de minimis incidental components cumulatively may comprise no more than a total of 5 percent of the total cost of the materials used in and incorporated into a project; the cost of an individual item may not exceed 1 percent of the total cost of the materials used in and incorporated into a project.

P.L. 113-76, Consolidated Appropriations Act, 2014 (Act), includes an "American Iron and Steel" (AIS) requirement in section 436 that requires Clean Water State Revolving Loan Fund (CWSRF) and Drinking Water State Revolving Loan Fund (DWSRF) assistance recipients to use specific domestic iron and steel products that are produced in the United States if the project is funded through an assistance agreement executed beginning January 17, 2014 (enactment of the Act), through the end of Fiscal Year 2014, unless the agency determines it necessary to waive this requirement based on findings set forth in Section 436(b). The Act states, "[the requirements] shall not apply in any case or category of cases in which the Administrator of the Environmental Protection Agency...finds that- (1) applying subsection (a) would be inconsistent with the public interest" 436(b)(1).

In implementing section 436 of the Act, the EPA must ensure that the section's requirements are applied consistent with congressional intent in adopting this section and in the broader context of the purposes, objectives, and other provisions applicable to projects funded under the SRF. Water infrastructure projects typically contain a relatively small number of high-cost components incorporated into the project. In bid solicitations for a project, these high-cost components are generally described in detail via project specific technical specifications. For these major components, utility owners and their contractors are generally familiar with the conditions of availability, the potential alternatives for each detailed specification, the approximate cost, and the country of manufacture of the available components.

Every water infrastructure project also involves the use of thousands of miscellaneous, generally low-cost components that are essential for, but incidental to, the construction and are incorporated into the physical structure of the project. For many of these incidental components, the country of manufacture and the availability of alternatives is not always readily or reasonably identifiable prior to procurement in the normal course of business; for other incidental components, the country of manufacture may be known but the miscellaneous character in conjunction with the low cost, individually and (in total) as typically procured in bulk, mark them as properly incidental. Examples of incidental components could include small washers, screws, fasteners (i.e., nuts and bolts), miscellaneous wire, corner bead, ancillary tube, etc. Examples of items that are clearly not incidental include significant process fittings (i.e., tees, elbows, flanges, and brackets), distribution system fittings and valves, force main valves, pipes for sewer collection and/or water distribution, treatment and storage tanks, large structural support structures, etc.

The EPA undertook multiple inquiries to identify the approximate scope of de minimis incidental components within water infrastructure projects during the implementation of the American Reinvestment and Recovery Act (ARRA) and its requirements (Buy American provisions, specifically). The inquiries and research conducted in 2009 applies suitably for the case today. In 2009, the EPA consulted informally with many major associations representing equipment manufacturers and suppliers, construction contractors, consulting engineers, and water and wastewater utilities, and performed targeted interviews with several well-established water infrastructure contractors and firms who work in a variety of project sizes, and regional and demographic settings to ask the following questions:

- What percentage of total project costs were consumables or incidental costs?
- What percentage of materials costs were consumables or incidental costs?
- Did these percentages vary by type of project (drinking water vs. wastewater treatment plant vs. pipe)?

The responses were consistent across the variety of settings and project types, and indicated that the percentage of total costs for drinking water or wastewater infrastructure projects represented by these incidental components is generally not in excess of 5 percent of the total cost of the materials used in and incorporated into a project. In drafting this waiver, the EPA has considered the de minimis proportion of project costs generally represented by each individual type of these incidental components within the many types of such components comprising those percentages, the fact that these types of incidental components are obtained by contractors in many different ways from many different sources, and the disproportionate cost and delay that would be imposed on projects if the EPA did not issue this waiver.


Assistance recipients who wish to use this waiver should in consultation with their contractors determine the items to be covered by this waiver and must retain relevant documentation (i.e., invoices) as to those items in their project files.

If you have any questions concerning the contents of this memorandum, please contact Timothy Connor, Chemical Engineer, Municipal Support Division, at connor.timothy@epa.gov or (202) 566-1059 or Kirsten Anderer, Environmental Engineer, Drinking Water Protection Division, at anderer.kirsten@epa.gov or (202) 564-3134.

A?Rt52014

Issued on: _____

Approved by: _____


Nancy K. Stoner
Acting Assistant Administrator

Ohio Water Pollution Control Loan Fund

Use of American Iron and Steel - De Minimis Final Utilization and Certification Form

The Consolidated Appropriations Act of 2014 (P.L. 113-76) Section 436 requires the use of American & Steel in SRF-funded projects. Under the authority of Section 436(b)(1), the EPA has issued a public interest waiver for De Minimis incidental components. The assistance recipient wishing to use this waiver should consult with their contractor(s) to maintain an itemized list of components covered under De Minimis. At the conclusion of the project, this form must be completed and retained in the assistance recipient's project files and a copy provided to DEFA. Please print clearly or type.

Project Name: _____ Loan Agrmt #: _____

NOTE: The De Minimis waiver is only applicable to the cost of materials for the entire project. Do not include other project costs (labor, installation costs, etc.) in the "Total Cost of Materials". The cost of a material must include delivery to the site and any applicable tax. Must have sufficient documentation to support all costs included in this calculation.

Funds used for de minimis incidental components cumulatively may comprise no more than a total of 5 percent of the total cost of the materials used in and incorporated into a project; the cost of an individual item may not exceed 1 percent of the total cost of the materials used in and incorporated into a project.

Total Cost of Materials: 5% Limit: 1% limit:

Manufacturer & Component Description	Part/Model #	Quantity (if applicable)	Cost per Unit (if applicable)	Component's Total Cost	How is Cost Documented?*

Use additional sheets as necessary

Total De Minimis Cost of Components:

If approaching the 5% or 1% limits, contact DEFA immediately

* Documentation must demonstrate confirmation of the components' actual costs (invoice, etc.).

Completed by:

Name: _____

Title: _____

Signature: _____

Date: _____

Prohibition on Telecommunications and Video Surveillance

As required by 2 CFR 200.216, EPA recipients and subrecipients, including borrowers under EPA funded revolving loan fund programs, are prohibited from obligating or expending loan or grant funds to procure or obtain; extend or renew a contract to procure or obtain; or enter into a contract (or extend or renew a contract) to procure or obtain equipment, services, or systems that use covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. As described in Public Law 115-232, section 889, covered telecommunications equipment is telecommunications equipment produced by **Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities)**. Recipients, subrecipients, and borrowers also may not use EPA funds to purchase:

- a. For the purpose of public safety, security of government facilities, physical security surveillance of critical infrastructure, and other national security purposes, video surveillance and telecommunications equipment produced by Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).
 - b. Telecommunications or video surveillance services provided by such entities or using such equipment.
 - c. Telecommunications or video surveillance equipment or services produced or provided by an entity that the Secretary of Defense, in consultation with the Director of the National Intelligence or the Director of the Federal Bureau of Investigation, reasonably believes to be an entity owned or controlled by, or otherwise connected to, the government of a covered foreign country.
- Consistent with 2 CFR 200.471, costs incurred for telecommunications and video surveillance services or equipment such as phones, internet, video surveillance, and cloud servers are allowable except for the following circumstances:
- a. Obligating or expending EPA funds for covered telecommunications and video surveillance services or equipment or services as described in 2 CFR 200.216 to:
 - (1) Procure or obtain, extend or renew a contract to procure or obtain;
 - (2) Enter into a contract (or extend or renew a contract) to procure; or
 - (3) Obtain the equipment, services, or systems.

Certain prohibited equipment, systems, or services, including equipment, systems, or services produced or provided by entities identified in section 889, are recorded in the [System for Award Management](#) exclusion list

④ **§ 200.216 Prohibition on certain telecommunications and video surveillance services or equipment.**

- (a) Recipients and subrecipients are prohibited from obligating or expending loan or grant funds to:
 - (1) Procure or obtain;
 - (2) Extend or renew a contract to procure or obtain; or
 - (3) Enter into a contract (or extend or renew a contract) to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. As described in [Public Law 115–232](#), section 889, covered telecommunications equipment is telecommunications equipment produced by Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities).
 - (i) For the purpose of public safety, security of government facilities, physical security surveillance of critical infrastructure, and other national security purposes, video surveillance and telecommunications equipment produced by Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).
 - (ii) Telecommunications or video surveillance services provided by such entities or using such equipment.
 - (iii) Telecommunications or video surveillance equipment or services produced or provided by an entity that the Secretary of Defense, in consultation with the Director of the National Intelligence or the Director of the Federal Bureau of Investigation, reasonably believes to be an entity owned or controlled by, or otherwise connected to, the government of a covered foreign country.
- (b) In implementing the prohibition under [Public Law 115–232](#), section 889, subsection (f), paragraph (1), heads of executive agencies administering loan, grant, or subsidy programs shall prioritize available funding and technical support to assist affected businesses, institutions and organizations as is reasonably necessary for those affected entities to transition from covered communications equipment and services, to procure replacement equipment and services, and to ensure that communications service to users and customers is sustained.
- (c) See [Public Law 115–232](#), section 889 for additional information.
- (d) See also [§ 200.471](#).

Resources:

[2 CRF 200.216](#)

FAQ's: [Sec. 889 of 2019 NDAA FAQ 20201124.pdf \(performance.gov\)](#)

[Public Law 115-232, Section 889](#)

[§ 200.471](#)

SECTION 9
PREVAILING WAGE RATES

Davis-Bacon Wage Rate Requirements

(required contract provision)

Background and Applicability

On October 30, 2009, P.L. 111-88, "Making appropriations for the Department of the Interior, environment, and related agencies for the fiscal year ending September 30, 2010, and for other purposes," was enacted. This law provides appropriations for both the Clean Water State Revolving Fund (CWSRF) and the Drinking Water State Revolving Fund (DWSRF) for Fiscal Year 2010, while adding new requirements to these already existing programs. One new requirement requires the application of Davis-Bacon Act requirements.

Application of the Davis-Bacon Act requirements extend not only to assistance agreements funded with Fiscal Year 2010 appropriations, but to all assistance agreements executed on or after October 30, 2009, whether the source of the funding is prior year's appropriations, state match, bond proceeds, interest earnings, principal repayments, or any other source of funding so long as the project is financed by an SRF assistance agreement. If a project began construction prior to October 30, 2009 but is financed or refinanced through an assistance agreement executed on or after October 30, 2009, Davis-Bacon Act requirements will apply to all construction that occurs on or after October 30, 2009, through completion of construction.

Ohio EPA Responsibilities

With respect to the Water Pollution Control Loan Fund (WPCLF) and Water Supply Revolving Loan Account (WSRLA) revolving funds, EPA provides capitalization grants to each State which in turn provides funding assistance to eligible recipients within the State. Typically, the assistance recipients are municipal or other local governmental entities that manage the funds. Occasionally, the assistance recipients may be a private for profit or not for profit entity. Although EPA and the State are responsible for ensuring assistance recipients incorporate the wage rate requirements set forth herein as part of contracts for WPCLF and WSRLA funding, the assistance recipient has the primary responsibility to maintain payroll records and for compliance with Davis-Bacon Act requirements as described below.

Municipal Or Other Local Governmental Entities Recipient's Responsibilities

The following is intended to help assistance recipients understand and meet their obligations related to Davis-Bacon (DB). Each assistance recipients should, however, review the contract/subcontract requirements that are set forth later in this document for a more full understanding of DB obligations.

Prior to advertising for bids:

- > Obtain the wage determination for the locality in which a covered activity subject to DB will take place from the Department of Labor (DOL) at www.wdol.gov.
- > Incorporate these wage determinations into the request for bids.
- > Include the required contract provisions (see below) into the contract documents.
- > Require prime contracts to include provisions that subcontractors follow the wage determination incorporated into the prime contract.

During the advertisement period:

- > Monitor www.wdol.gov on a weekly basis to ensure that the wage determination contained in the request for bids remains current.
- > If DOL modifies the DB wage determination more than 10 days prior to the bid opening, issue an addendum reflecting the modification.
- > If DOL modifies or supersedes the DB wage determination less than 10 days prior to bid opening and you cannot issue an addendum for the change, you must request a finding from Ohio EPA that there is not reasonable time to notify interested contractors of the modification of the wage determination. The Ohio EPA will give you a report of its findings.

After opening bids:

- > If the contract(s) aren't awarded within 90 days of the bid opening you must monitor www.wdol.gov on a weekly basis to ensure that wage determinations used in the bids remain current.
- > If the contract(s) aren't awarded within 90 days of the bid opening, any modifications or supersedes that DOL makes to the wage determination must be incorporated into the contract unless (1) you request an extension from Ohio EPA AND (2) Ohio EPA obtains an extension of the 90 day period from DOL pursuant to 29 CFR 1.6(c)(3)(iv).

After contracts are signed and during construction:

- > Review all subcontracts subject to DB entered into by prime contractors to verify that the prime contractor has required its subcontractors to include the applicable wage determinations.
- > DOL may issue a revised wage determination applicable to one or all of your contracts after the award of the contract or execution of the change order which incorporated DB requirements into the contract if DOL determines that you have failed to incorporate a wage determination or have used a wage determination that clearly does not apply to the contract. If this occurs, you shall either terminate the contract or change order and rebid the contract OR incorporate DOL's wage determination retroactive to the beginning of the contract by change order. The contractor must be compensated for any increases in wages resulting from the use of DOL's revised wage determination.
- > Periodically interview a sufficient number of employees entitled to DB prevailing wages (covered employees) to verify that contractors or subcontractors are paying the appropriate wage rates. As provided in 29 CFR 5.6(a)(6), all interviews must be conducted in confidence. You must use Standard Form 1445 or equivalent documentation to memorialize the interviews.
- > Establish and follow an interview schedule based on its assessment of the risks of noncompliance with DB posed by contractors or subcontractors and the duration of the contract or subcontract. At a minimum, you must:
 - conduct all interviews in confidence.
 - conduct interviews with a representative group of covered employees within two weeks of each contractor or subcontractor's submission of its initial weekly payroll data and two weeks prior to the estimated completion date for the contract or subcontract.
 - conduct more frequent interviews if the initial interviews or other information indicates that there is a risk that the contractor or subcontractor is not complying with DB.
 - immediately conduct necessary interviews in response to an alleged violation of the prevailing wage requirements.
- > Periodically conduct spot checks of a representative sample of weekly payroll data to verify that contractors or subcontractors are paying the appropriate wage rates. You must:
 - establish and follow a spot check schedule based on your assessment of the risks of noncompliance with DB posed by contractors or subcontractors and the duration of the contract or subcontract.
 - spot check payroll data within two weeks of each contractor or subcontractor's submission of its initial payroll data and two weeks prior to the completion date the contract or subcontract at a

minimum.

- conduct more frequent spot checks if the initial spot check or other information indicates that there is a risk that the contractor or subcontractor is not complying with DB.
- during the examinations, verify evidence of fringe benefit plans and payments thereunder by contractors and subcontractors who claim credit for fringe benefit contributions.

> Periodically review contractors' and subcontractors' use of apprentices and trainees to verify registration and certification with respect to apprenticeship and training programs approved by either the DOL or a state, as appropriate, and that contractors and subcontractors are not using disproportionate numbers of, laborers, trainees and apprentices. These reviews shall be conducted in accordance with the schedules for spot checks and interviews.

> Immediately report potential violations of the DB prevailing wage requirements to Andrew Lausted at EPA Region V at 312-886-0189 and to the appropriate DOL Wage and Hour District Office listed at <http://www.dol.gov/esa/contacts/whd/america2.htm>.

If contracts have already been signed and DB requirements need to be incorporated:

> If contracts have already been signed prior to WPCLF/WSRLA funding being provided, you must issue a change order, task order, work assignment or similar legally binding instrument and incorporate the appropriate DOL wage determination from www.wdol.gov as well as the required contract provisions into the contract(s).

> Initiate the contractor and subcontractor review and wage interview requirements as described above and provided in the **Contract And Subcontract Provisions**.

**Private For Profit Or Not For Profit (Non-Governmental) Entities
Recipient's Responsibilities**

The requirements, responsibilities and contract provisions for Private For Profit or Not For Profit Entities (Non-Governmental Entities) is exactly the same as for Municipal Or Other Local Governmental Entities EXCEPT for the following:

Prior to advertising for bids:

> Obtain the proposed wage determinations for specific localities from www.wdol.gov.

> Submit the wage determination to Ohio EPA for approval prior to inserting the wage determination into the solicitation unless subsequently directed otherwise by Ohio EPA.

Contract And Subcontract Provisions For Contracts In Excess Of \$2,000

The following language must be included in full in any contract in excess of \$2,000 which is entered into for the actual construction, alteration and/or repair, including painting and decorating, of a public building or public work, or building or work financed in whole or in part with WPCLF or WSRLA funds and which is subject to the labor standards provisions of any of the acts listed in §5.1:

NOTE: Modify the first sentence to include the name of the WPCLF/WSRLA funding recipient prior to including these provisions in the contract documents.

Wage Rate Requirements

As used in these provisions "subrecipient" means _____ (fill in WPCLF/WSRLA funding recipient name here).

(a) The following applies to any contract in excess of \$2,000 which is entered into for the actual construction, alteration and/or repair, including painting and decorating, of a public building or public work, or building or work financed in whole or in part from Federal funds or in accordance with guarantees of a Federal agency or financed from funds obtained by pledge of any contract of a Federal agency to make a loan, grant or annual contribution (except where a different meaning is expressly indicated), and which is subject to the labor standards provisions of any of the acts listed in § 5.1.

(1) Minimum wages.

(i) All laborers and mechanics employed or working upon the site of the work will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph (a)(1)(iv) of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in § 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph (a)(1)(ii) of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

Subrecipients may obtain wage determinations from the U.S. Department of Labor's web site, www.wdol.gov.

(ii)(A) The subrecipient(s), on behalf of EPA, shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The EPA award official shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(1) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(2) The classification is utilized in the area by the construction industry; and

(3) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(B) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the subrecipient(s) agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the subrecipient(s) to the State award official. The State award official will transmit the report, to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the State award official or will notify the State award official within the 30-day period that additional time is necessary.

(C) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the and the subrecipient(s) do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the award official shall refer the questions, including the views of all interested parties and the recommendation of the State award official, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(D) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs (a)(1)(ii)(B) or (C) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

(iii) Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

(iv) If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account asset for the meeting of obligations under the plan or program.

(2) Withholding. The subrecipient(s), shall upon written request of the EPA Award Official or an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the (Agency) may, after written notice to the contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

(3) Payrolls and basic records.

(i) Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions

or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

(ii)(A) The contractor shall submit weekly, for each week in which any contract work is performed, a copy of all payrolls to the subrecipient, that is, the entity that receives the subgrant or loan from the State capitalization grant recipient. Such documentation shall be available on request of the State recipient or EPA. As to each payroll copy received, the subrecipient shall provide written confirmation in a form satisfactory to the State indicating whether or not the project is in compliance with the requirements of 29 CFR 5.5(a)(1) based on the most recent payroll copies for the specified week. The payrolls shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on the weekly payrolls. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the subrecipient(s) for transmission to the State or EPA if requested by EPA, the State, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the subrecipient(s).

(B) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) That the payroll for the payroll period contains the information required to be provided under § 5.5(a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under § 5.5(a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(2) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(3) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(C) The weekly submission of a properly executed certification set forth on the reverse side of Optional

Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph (a)(3)(ii)(B) of this section.

(D) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

(iii) The contractor or subcontractor shall make the records required under paragraph (a)(3)(i) of this section available for inspection, copying, or transcription by authorized representatives of the State, EPA or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the Federal agency or State may, after written notice to the contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

(4) Apprentices and trainees --

(i) Apprentices. Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(ii) Trainees. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S.

Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(iii) Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

(5) Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

(6) Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses contained in 29 CFR 5.5(a)(1) through (10) and such other clauses as the EPA determines may be appropriate, and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

(7) Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

(8) Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

(9) Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and subrecipient(s), State, EPA, the U.S. Department of Labor, or the employees or their representatives.

(10) Certification of eligibility.

(i) By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(ii) No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(iii) The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

Contract Provision For Contracts In Excess Of \$100,000 And Subject To The Overtime Provisions Of The Contract Work Hours And Safety Standards Act

The following language must be included in full in any contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These provisions are to be included in addition to the provisions for contracts in excess of \$2,000. As used in these paragraphs, the terms laborers and mechanics include watchmen and guards.

(b) Contract Work Hours and Safety Standards Act. The following applies to any contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. As used in these paragraphs, the terms laborers and mechanics include watchmen and guards.

(1) Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

(2) Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (b)(1) of this section the contractor and any subcontractor responsible therefore shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (a)(1) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (b)(1) of this section.

(3) Withholding for unpaid wages and liquidated damages. The subrecipient, upon written request of the EPA Award Official or an authorized representative of the Department of Labor, shall withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (b)(2) of this section.

(4) Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (b)(1) through (4) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (b)(1) through (4) of this section.

Contract Provision For Contracts In Excess Of \$100,000 Subject ONLY To The Contract Work Hours And Safety Standards Act

In addition to the provisions for contracts in excess of \$2,000, for any contract subject only to the Contract Work Hours and Safety Standards Act and not to any of the other statutes cited in 29 CFR 5.1, you must insert clauses requiring:

(c) The following applies to any contract subject only to the Contract Work Hours and Safety Standards Act and not to any of the other statutes cited in 29 CFR 5.1.

The contractor or subcontractor shall maintain payrolls and basic payroll records during the course of the work and shall preserve them for a period of three years from the completion of the contract for all laborers and mechanics, including guards and watchmen, working on the contract. Such records shall contain the name and address of each such employee, social security number, correct classifications, hourly rates of wages paid, daily and weekly number of hours worked, deductions made, and actual wages paid.

The records shall be maintained under this paragraph shall be made available by the contractor or subcontractor for inspection, copying, or transcription by authorized representatives of the Ohio EPA, EPA and the Department of Labor, and the contractor or subcontractor will permit such representatives to interview employees during working hours on the job.

PREVAILING WAGE ORIENTATION MEETING

After award of contract the prime contractor and all approved subcontractors shall participate in a prevailing wage orientation meeting.

ONLINE FILLABLE WH-347 FORM

The On-line .pdf Fillable Form for Davis-Bacon and Related Acts Weekly Certified Payroll HW-347 is located at <https://www.dol.gov/agencies/whd/forms/wh347>

Davis-Bacon and Related Acts Weekly Certified Payroll Form
(For Contractor's Optional Use; See Instructions at www.dol.gov/whd/forms/wh347instr.htm)



Unless otherwise noted, the information requested is specific to the named project below.
Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number.

Rev. January 2025
OMB No.: 1235-0008
Expires: 01/31/2028

☐ SUBMISSION OF FINAL DBRA CERTIFIED PAYROLL FORM

☐ PRIME CONTRACTOR

☐ SUBCONTRACTOR

PROJECT NAME		PROJECT NO. or CONTRACT NO.		CERTIFIED PAYROLL NO.		PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS NAME														
PROJECT LOCATION		WAGE DETERMINATION NO.		WEEK ENDING DATE		PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS ADDRESS														
WORKER ENTRY NO.	WORKER LAST NAME	WORKER FIRST NAME	WORKER MIDDLE INITIAL	WORKER IDENTIFYING NO.	(1) JOURNEYWORKER (RA) REGISTERED APPRENTICE	(2)	(3) LABOR CLASSIFICATION	(4) (TOP) DAYS OF WORK WEEK (BOTTOM) DATES		(5) TOTAL HOURS WORKED FOR WEEK		(6A) PAID FOR ST AND OT	(6B) TOTAL FRINGE BENEFIT CREDIT	(6C) PAYMENT IN LIEU OF FRINGE BENEFITS	(7A) GROSS AMT EARNED	(7B) GROSS AMT EARNED FOR ALL WORK	(8) DEDUCTIONS FOR ALL WORK		(9) NET PAY TO WORKER FOR ALL WORK	
								ST = STRAIGHT TIME	HOURS WORKED EACH DAY								TAX WITH- HOLDINGS	FICA	OTHER (MUST SPECIFY, SEE INSTRUCTIONS)	TOTAL DEDUCTIONS
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												
								ST												
								OT												

While use of Form WH-347 itself is optional, covered contractors and subcontractors performing work on Federal or federally assisted construction contracts are required by the DBRA regulations and the contract clauses to submit payroll information on a weekly basis. The Copeland Act (40 U.S.C. § 3145) requires contractors and subcontractors performing work on Federal or federally financed construction contracts to, on a weekly basis, "furnish a statement on the wages paid each employee during the prior week." U.S. Department of Labor (DOL) Regulations at 29 C.F.R. § 5.5(a)(3)(ii) require contractors and subcontractors to submit weekly certified payrolls to the appropriate Federal agency if the agency is a party to the contract (or, if the agency is not such a party, to the applicant, sponsor, owner, or other entity, as the case may be, that maintains such records, for transmission to the Federal agency). Each certified payroll must be accompanied by a signed "Statement of Compliance" (e.g., page 2 of the WH-347 or another document with identical wording) indicating that the certified payrolls are accurate and complete, and that each laborer or mechanic has been paid not less than the required Davis-Bacon prevailing wage rate(s) (including any fringe benefits) for the work performed. DOL and contracting agencies receiving this information review the information to determine whether workers have received legally required wages and fringe benefits.

Public Burden Statement

We estimate that it will take an average of 55 minutes to complete this collection, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. If you have any comments regarding these estimates or any other aspect of this collection, including suggestions for reducing this burden, send them to the Administrator, Wage and Hour Division, U.S. Department of Labor, Room 53502, 200 Constitution Avenue, N.W. Washington, D.C. 20210 (over)

PROJECT NAME	PROJECT NO. or CONTRACT NO.	PAYROLL NO.	PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS NAME							
PROJECT LOCATION		WEEK ENDING DATE	CERTIFYING OFFICIAL'S NAME AND TITLE							
I paid or supervised the payment of the laborers or mechanics working on the above project during the stated time period. I certify the following:										
☐	The payroll information submitted with this statement is correct and complete for the above project during the above period, and the wage and fringe benefit rates paid to the workers, including credit taken for the reasonably anticipated costs of a bona fide fringe benefit plan, fund or program, are not less than the applicable wage and fringe benefits rates for the classification(s) of work actually performed, as specified in the wage determination(s) incorporated into the contract.									
☐	All regular payrolls and all other basic records that the contractor is required to maintain for this payroll period are complete and accurate and will be made available upon request from the agency or the Department of Labor.									
☐	The classifications reported for each laborer or mechanic are the classification(s) of work that each worker actually performed.									
☐	Any workers paid as apprentices during the above period are duly registered in a bona fide apprenticeship program registered with the Office of Apprenticeship, Employment and Training Administration, United States Department of Labor ("OA"), or a State Apprenticeship Agency ("SAA") recognized by Department of Labor. I have verified the registered apprenticeship program information provided below as accurate and applicable to any apprentices identified on page 1 of this form.									
APPRENTICESHIP PROGRAM NAME										
REGISTERED										
☐ OA ☐ SAA										
☐ OA ☐ SAA										
☐ OA ☐ SAA										
☐	Fringe benefits have been paid in cash and/or to bona fide fringe benefit plans, funds, or programs. Where the contractor is claiming an hourly credit for their contributions to or reasonably anticipated costs of a bona fide fringe benefit plan, fund, or program, provide plan information and the hourly credit claimed for each worker listed on the previous page of this form.									
HOURLY CREDIT FOR FRINGE BENEFITS										
If an amount is listed in (6B) on the first page of this certified payroll form, enter the hourly credit claimed under each plan name, type and number for each worker and check whether the plan is funded or unfunded.										
NAME OF WORKER	FB NAME	FB TYPE	PLAN NO.	FB NAME	FB TYPE	PLAN NO.	FB NAME	FB TYPE	PLAN NO.	TOTAL HOURLY CREDIT
	☐ Funded ☐ Unfunded	Hourly Credit	Hourly Credit	Hourly Credit	☐ Funded ☐ Unfunded	Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	☐ Funded ☐ Unfunded
		\$	\$	\$		\$	\$	\$	\$	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
		Hourly Credit	Hourly Credit	Hourly Credit		Hourly Credit	Hourly Credit	Hourly Credit	Hourly Credit	\$
☐	All workers on the project have been paid the full weekly wages earned, and no rebates or deductions have been or will be made either directly or indirectly, other than permissible deductions as defined in 29 CFR part 3.									
ADDITIONAL REMARKS										
SIGNATURE OF CERTIFYING OFFICIAL										
TELEPHONE NUMBER										
EMAIL ADDRESS										
DATE										
() - - - - -										
THE WILLFUL FALSIFICATION OF ANY OF THE ABOVE STATEMENTS MAY SUBJECT THE CONTRACTOR OR SUBCONTRACTOR TO CIVIL OR CRIMINAL PROSECUTION (SEE SECTION 1001 OF TITLE 18 AND SECTION 3729 OF TITLE 31 OF THE UNITED STATES CODE), AS WELL AS DEBARMENT FROM FUTURE FEDERAL AND FEDERALLY-ASSISTED CONTRACTS. INFORMATION REPORTED IN CERTIFIED PAYROLLS MAY BE SUBJECT TO DISCLOSURE IN RESPONSE TO A FREEDOM OF INFORMATION ACT REQUEST.										

Wage and Hour Division

Instructions For Completing Davis-Bacon and Related Acts Weekly Certified Payroll Form, WH-347

- [WH-347 \(PDF\)](#)
OMB Control No. 1235-0008, Expires 01/31/2028.
- [WH-347 Form Annotated Guide \(PDF\)](#)
- [Online Fillable WH-347 Form](#)

General: Form WH-347 is available for the convenience of contractors and subcontractors to submit certified weekly payrolls in connection with their Federal or federally assisted construction contracts and subcontracts. Properly completed, this form will satisfy the requirements of the regulations in parts 3 and 5 of Title 29 of the Code of Federal Regulations (CFR) as to certified payrolls submitted in connection with contracts subject to the Davis-Bacon and Related Acts (DBRA).

While use of Form WH-347 itself is optional, covered contractors and subcontractors performing work on Federal or federally assisted construction contracts are required by the DBRA regulations and the contract clauses to submit payroll information on a weekly basis. The Copeland Act (40 U.S.C. § 3145) requires contractors and subcontractors performing work on Federal or federally financed construction contracts to, on a weekly basis, “furnish a statement on the wages paid each employee during the prior week.” U.S. Department of Labor (DOL) Regulations at 29 CFR 5.5(a)(3)(ii) require contractors and subcontractors to submit weekly certified payrolls to the appropriate Federal agency if the agency is a party to the contract (or, if the Federal agency is not party to the contract, to the applicant, sponsor, owner, or other entity, as the case may be, that maintains such records, for transmission to the Federal agency that provided the Federal assistance). Each certified payroll must be accompanied by a signed “Statement of Compliance” (e.g., page 2 of the WH-347 or another document with *identical* wording) indicating that the certified payrolls are accurate and complete, and that each laborer or mechanic has been paid not less than the required Davis-Bacon prevailing wage rate(s) (including any fringe benefits) for the work performed. DOL and contracting agencies receiving this information review the information to help determine whether workers have received legally required wages and fringe benefits.

Under the DBRA, contractors and subcontractors are required to pay not less than the prevailing wage, including fringe benefits, as predetermined by DOL. The contractor’s obligation to pay fringe benefits may be met through the contractor’s contributions to or reasonably anticipated costs of bona fide benefit plans, funds, or programs, or by paying workers cash in lieu of fringe benefits.

Form WH-347 provides fields for contractors and subcontractors to document all wages paid to each worker, whether paid entirely as cash wages or by a combination of cash wages and employer-provided bona fide fringe benefits, and provides for the contractor or subcontractor’s certification in the Statement of Compliance (as shown on page 2 of Form WH-347) that the data and payroll information on the form are accurate and complete. The Statement of Compliance also provides for the representation that the contractor or subcontractor is paying its workers, including registered apprentices, at least the required wage rates, satisfying its fringe benefits obligations, and maintaining required payroll records.

Detailed instructions for completing the first page of Form WH-347 follow:

“Check Box” for Submission of Final DBRA Certified Payroll Form: Mark the box to indicate that this submission is for the final week of work on the project for the contractor or subcontractor.

“Check Box” for Prime Contractor or Subcontractor: Mark the appropriate box to indicate whether it is the prime contractor or a subcontractor on the project for which certified payroll is being reported.

Project Name: Enter the name of the project on which you are reporting.

Project No. or Contract No.: Enter the project number or the prime contract number assigned by the relevant contracting agency (if available).

Certified Payroll No.: Beginning with the number “1”, each weekly certified payroll that a contractor or subcontractor submits for a project should be given a payroll number. Enter the appropriate payroll number.

Prime Contractor's/Subcontractor's Business Name: Enter the business' legal name.

Project Location: Enter the complete address of the project, or, if there is no specific address, a description of the project location, including, at a minimum, the county or counties and state in which the project is located.

Wage Determination No.: Enter the wage determination number(s) and revision number(s) included in the covered contract and relevant to the submitted certified payroll form (e.g., if there are multiple wage determinations applicable to the project, please list all wage determinations that applied to the work performed by the workers in this pay period).

Week Ending Date: Enter the workweek ending date for this pay period.

Prime Contractor's/Subcontractor's Business Address: Enter the company's full business address.

Column 1A – Worker Entry No.: Beginning with the number “1”, enter each worker's entry number (e.g., entry in row 2 may be 2, entry in row 3 may be 3, etc. If reporting more than 8 entries, row 1 on page 2 may be entry 9 and row 1 on page 3 may be entry 17, etc.). If a worker works in more than one labor classification during the course of the week, the contractor should show the number of hours the worker worked in each classification using separate rows. In such circumstances, the same worker entry number should be used on each row associated with the worker.

Column 1B – Worker Last Name: Self-explanatory.

Column 1C – Worker First Name: Self-explanatory.

Column 1D – Worker Middle Initial: Self-explanatory.

Column 1E – Worker Identifying No.: Enter each worker's individual identifying number (e.g., last four digits of the worker's social security number or any number specific to the individual worker) on each weekly certified payroll submitted. **Note:** *workers' full Social Security numbers must **not** be included.*

Column 2 – Journeyworker / Registered Apprentice: Enter “J” if the worker is a journeyworker or “RA” if the worker is a registered apprentice in an apprenticeship program approved by DOL's Office of Apprenticeship (OA) or a State Apprenticeship Agency (SAA). For registered apprentices, also list their level of progression within the approved program.

Column 3 – Labor Classification: List the labor classification for the work actually performed by each worker. Labor classifications are found in the applicable Davis-Bacon wage determination(s) that are included in the contract for this project. If the wage determination(s) does not include a labor classification for work that a worker has performed on this contract, contact the Contracting Officer or Agency representative immediately.

If a worker performed work in more than one labor classification during the week, the worker must be paid at least the rate specified for the appropriate labor classification for the time actually worked in that labor classification. In such circumstances, an accurate breakdown of hours worked in each labor classification must be shown on the submitted payroll by using a separate row for each labor classification in which the worker performed work. If the contractor did not maintain an accurate breakdown of hours worked by a worker in each labor classification, the worker must be paid for all hours worked using the highest applicable prevailing wage rate (basic hourly rate and fringe benefits).

Column 4 – Hours Worked Each Day: In column 4 in the table above row 1, please enter the first letter for each day of the contractor's workweek in each box on the top row and its corresponding date in each box on the second row below it. For example, if a contractor's workweek starts on Tuesday and ends on Monday, enter “T” for Tuesday in the first box of the first row and continue with the appropriate letter identifying the day of the week for each box ending with “M” on the last box of the first row. In the second row, enter the corresponding date for each day of the week. Please see example below:

T	W	T	F	S	S	M
6/16	6/17	6/18	6/19	6/20	6/21	6/22

For worker-specific entries, please enter hours worked on this project as straight time (“ST”) and overtime (“OT”) in the applicable boxes. On all contracts subject to the Contract Work Hours and Safety Standards Act (CWHSSA), enter hours worked on this project in excess of 40 hours total in the week as overtime (“OT”) (including hours worked on and off the site of the work of the covered contract). **Note:** *For more information about compliance with overtime requirements on Federal and federally assisted contracts, please visit [Overtime Pay on Government Contracts](#).*

Column 5 – Total Hours Worked for the Week: Enter the total number of the hours worked entered in column four.

Column 6A – Hourly Wage Rate Paid for ST and OT: For each worker, list the actual hourly rate paid for straight time (top row) and overtime (bottom row) worked for work in the classification indicated in column 3. If the worker was paid at a higher rate than the wage rate required on the wage determination, indicate the wage rate the worker was actually paid. **Note:** *do not include cash payments in lieu of fringe benefits in this column.*

Column 6B – Total Fringe Benefit Credit: Enter the total of the contractor’s or subcontractor’s contributions to or reasonably anticipated costs of bona fide fringe benefit plans, funds, or programs for which the contractor or subcontractor is taking a credit toward satisfying Davis-Bacon prevailing fringe benefit rates as listed on page 2 of Form WH-347 under “Hourly Credit for Fringe Benefits”. This amount should equal the worker’s total hours worked in this period multiplied by the hourly credit for fringe benefits as listed under the Total Hourly Credit column on page 2 of Form WH-347 under “Hourly Credit for Fringe Benefits”.

Column 6C – Payment in Lieu of Fringe Benefits: Enter the total amount in cash provided in lieu of fringe benefits to the worker during the workweek. This amount should equal the worker’s total hours worked in this period multiplied by the hourly rate provided to the worker as cash in lieu of fringe benefits.

Column 7A – Gross Amount Earned: Enter the worker’s gross amount earned for the workweek for hours worked on this Federal or federally assisted project.

Column 7B –Gross Amount Earned for all Work: If part of a worker’s weekly wage was earned on projects or work other than the project described on this payroll, including non-DBRA covered projects, enter in column 7B the total gross amount earned during the week for all work performed during the week.

Column 8 – Deductions for all Work: Enter all deductions made from worker’s total gross amount earned for all work (Column 7B). Columns are provided for entering deductions made for tax withholdings, FICA, and “Other” deductions. If the amount under “Other” deductions is specific to one deduction, please describe the deduction under “Additional Remarks” on page 2 of this certified payroll form. If the amount under the “Other” deductions made from the worker’s pay is a result of more than one deduction, submit an addendum that itemizes each deduction and includes a description and amount for each deduction listed on that document. Enter the total amount for all deductions actually made under the “Total Deductions” column (include the amounts listed under the Tax Withholdings, FICA and Other columns). All deductions must be in accordance with the provisions of the Copeland Act Regulations, 29 CFR part 3. If a worker worked on other jobs in addition to this project, do not pro-rate the deductions; instead, show actual deductions from the worker’s weekly gross wage for all projects. **Note:** *Except for deductions listed in 29 CFR 3.5, all deductions must have prior approval from the Department of Labor.*

Column 9 – Net Payment to Worker for All Work: Enter the actual dollar amount paid to the worker for all hours worked across all projects (including non-DBRA covered projects) during the week.

Detailed instructions for completing the second page of Form WH-347 follow:

Project Name: Enter the name of the project on which you are reporting.

Project No. Or Contract No.: Enter the project or prime contract number associated with your contract assigned by the relevant contracting agency (if available).

Payroll No.: Beginning with the number “1”, each weekly certified payroll that a contractor or subcontractor submits for a project should be given a payroll number. Enter the appropriate payroll number.

Prime Contractor’s/Subcontractor’s Business Name: Enter the business’ legal name.

Project Location: Enter the complete address of the project, or, if there is no specific address, a description of the project location, including, at a minimum, the county or counties and state in which the project is located.

Week Ending Date: Enter the workweek ending date for this pay period.

Certifying Official’s Name and Title: Print the name and official title of the contractor or subcontractor, or their agent who paid or supervised the payment of the workers under the contract during the weekly time period covered by the form.

Statement of Compliance: While the “Statement of Compliance” need not be notarized, the statement (on page 2 of this certified payroll form) is subject to the penalties provided by 18 U.S.C. § 1001, namely, a fine, possible imprisonment of not more than 5 years, or both. Accordingly, the party signing this statement should have knowledge of the facts represented as true.

If applicable, please “check” each of the 6 boxes certifying the accompanying statement as accurate. Boxes 1, 2, 3 and 6 (i.e., the first three boxes and the last box) always **must** be checked to certify that the contractor or subcontractor completing the form is in compliance with the DBRA.

If any worker is being paid as an apprentice during the period, box 4 **must** be checked and each program name in which the contractor has registered apprentices working on the project during this payroll period must be listed, with the appropriate box checked to indicate whether the apprenticeship program is registered with DOL's Office of Apprenticeship (OA) or a State Apprenticeship Agency (SAA), and the name of the labor classification entered. If more than three entries are required, please submit an addendum providing the requested information with the submission of the certified payroll. If box 4 is not applicable, do not check the box and enter "Not Applicable" or "N/A" in the entry subsection, under Apprenticeship Program Name.

If the contractor or subcontractor is claiming an hourly credit for their contributions to or reasonably anticipated costs of bona fide fringe benefit plans, funds, or programs, box 5 must be checked and the subsections titled "Hourly Credit for Fringe Benefits" must be completed. In the first column, list each worker entry number (entered in column 1A on the first page) and name of worker for whom the contractor or subcontractor claimed an hourly fringe benefit credit (this should mirror the worker names and order found on Page 1 of the certified payroll form). In the following columns, list each fringe benefit plan name in the top row, fringe benefit plan type in the second row, fringe benefit plan number in the third row, mark whether the fringe benefit plan is funded or unfunded in the fourth row, and state the hourly amount of credit claimed for each worker under each applicable plan in the rows below. In the last column, list the total hourly cost of fringe benefit provided for each worker. Where the contractor or subcontractor is claiming a credit for the reasonably anticipated costs of fringe benefits provided directly by the contractor (commonly referred to as an "unfunded plan"), the contractor or subcontractor must have prior approval from the Department of Labor prior to claiming such credit as required in 29 CFR 5.28. If more than six bona fide fringe benefits are provided to the workers for which the contractor is claiming a credit, submit an addendum for each providing the information requested in this section.

Note: If the contractor or subcontractor is meeting its fringe benefit obligations partially through contributions to or reasonably anticipated costs of a bona fide fringe benefit plan and partially through the payment of cash in lieu of fringe benefits, the contractor or subcontractor should enter the respective amounts in this section and in column 6C (Cash Payment in Lieu of Fringe Benefits) on page 1. If the contractor or subcontractor is meeting its fringe benefits obligations by simply paying the cash equivalent to each worker, check the box but do not complete the subsection, because those payments will be reported under column 6C (Cash Payment in Lieu of Fringe Benefits) on page 1.

Additional Remarks: Optional space for additional information on deductions, hourly cost of fringe benefits, or explanations. If more space is needed, please continue remarks on a separate page. If the optional space or separate pages are used, please include all contractor and project information required by the form.

Signature of Certifying Official, Date, Telephone Number, and Email Address: The Statement of Compliance must be signed by the contractor or subcontractor, or their agent who paid or supervised the payment of the workers under the contract during the weekly time period covered by the form. Enter the phone number and email address of the individual who is signing the statement and the date signed. Legally valid electronic signatures are acceptable. A legally valid electronic signature includes any electronic process that indicates acceptance of the certified payroll record and includes an electronic method of verifying the signer's identity.

Note: Photocopies or scanned copies of signatures do not satisfy this requirement.

Public Burden Statement: We estimate that it will take an average of 55 minutes to complete this collection of information, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. If you have any comments regarding these estimates or any other aspect of this collection of information, including suggestions for reducing this burden, send them to the Administrator, Wage and Hour Division, U.S. Department of Labor, Room S3502, 200 Constitution Avenue, N.W., Washington, D.C. 20210.

Note: In order to view, fill out, and print PDF forms, you need Adobe® Acrobat® Reader® version 5 or later, which you may download for free at www.adobe.com/products/acrobat/readstep2.html.

Topics	Worker Rights	For Employers	Resources	Interpretive Guidance	State Laws
--------	---------------	---------------	-----------	-----------------------	------------



FEDERAL GOVERNMENT	LABOR DEPARTMENT	WHD PORTALS
---------------------------	-------------------------	--------------------

White House

About DOL

YouthRules!

Disaster Recovery Assistance Guidance Search

Wage Determinations

DisasterAssistance.gov

Español
DB.16

Accessibility Statement

Wage and Hour Division

An agency within the U.S.
Department of Labor

200 Constitution Ave NW
Washington, DC 20210
[1-866-4-US-WAGE](tel:1-866-4-US-WAGE)
[1-866-487-9243](tel:1-866-487-9243)
www.dol.gov

USA.gov

[No Fear Act Data](#)

[U.S. Office of Special Counsel](#)

[Office of Inspector General](#)

[A to Z Index](#)

Connect With DOL



[Important Website Notices](#) | [Privacy & Security Statement](#)

How to correctly fill out the Davis-Bacon and Related Acts Weekly Certified Payroll WH-347 Form
 The completion of the WH-347 Davis Bacon and Related Acts Weekly Certified Payroll Form is optional;
 The required weekly certified payroll information may be submitted using Optional Form WH-347 or in
 any other format desired.

When contracted work is complete, check box for last WH-347 submission

Starting with #1, payrolls must be numbered sequentially and should be based on the weeks worked under the contract

Link to written instructions on how to complete the WH-347 form, www.dol.gov/whd/forms/wh347instr.htm

Enter the project number or the prime contract number associated with your contract

Identify whether the submission of the WH-347 form is from the prime or subcontractor, check one box

Enter the business' legal name

U.S. Department of Labor
 Wage and Hour Division

Davis-Bacon and Related Acts Weekly Certified Payroll Form
 (For Contractor's Optional Use; See Instructions at www.dol.gov/whd/forms/wh347instr.htm)
 Unless otherwise noted, the information requested is specific to the named project below.
 Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number.

☐ SUBMISSION OF FINAL DBRA CERTIFIED PAYROLL FORM ☐ PRIME CONTRACTOR ☐ SUBCONTRACTOR

Rev. January 2025
 OMB No.: 1235-0008
 Expires: 01/31/2028

PROJECT NAME	PROJECT NO. or CONTRACT NO.	CERTIFIED PAYROLL NO.	PRIME CONTRACTOR'S or SUBCONTRACTOR'S BUSINESS NAME
PROJECT LOCATION	WAGE DETERMINATION NO.	WEEK ENDING DATE	PRIME CONTRACTOR'S or SUBCONTRACTOR'S BUSINESS ADDRESS

Enter the name of the project on which you are reporting

Enter the wage determination number(s) and revision number(s) included in the covered contract (note: more than one may be required)

Enter the company's full business address

Enter the complete address of the project, or, if there is no specific address, a description of the project location, including, at a minimum, the county or counties and state in which the project is located

Enter the workweek ending date for this pay period

Beginning with the number "1", enter each worker's entry number. Note: If a worker is listed multiple times due to performing work under different labor classifications, the same worker entry number must be used for that worker during same workweek

Enter each worker's unique identifying number

Enter "J" for Journeyworker or "RA" for Registered Apprentice

Enter the labor classification for the work actually performed by each worker

Enter sum of hours listed in column 4

Indicate the days and dates of the pay period

Enter straight time and overtime hours worked

Straight Time Hourly Rate

Overtime Hourly Rate

Enter the total contributions to or reasonably anticipated costs of bona fide fringe benefit plans, funds, or programs as listed on page 2

Self-Explanatory

(1A)	(1B)	(1C)	(1D)	(1E)	(2)	(3)	(4)	(5)	(6A)	(6B)	(6C)	(7A)	(7B)	(8)			(9)		
WORKER ENTRY NO.	WORKER LAST NAME	WORKER FIRST NAME	WORKER MIDDLE INITIAL	WORKER IDENTIFYING NO.	(J) JOURNEYWORKER (RA) REGISTERED APPRENTICE	LABOR CLASSIFICATION	ST - STRAIGHT TIME OT - OVERTIME	(TOP) DAYS OF WORK WEEK (BOTTOM) DATES	HOURS WORKED EACH DAY	TOTAL HOURS WORKED FOR WEEK	HOURLY WAGE RATE PAID FOR ST AND OT	TOTAL FRINGE PAYMENT IN LIEU OF FRINGE BENEFITS	GROSS AMT EARNED	GROSS AMT EARNED FOR ALL WORK	TAX WITH- HOLDINGS	FICA	OTHER DEDUCTIONS (SPECIFY SEE INSTRUCTIONS)	TOTAL DEDUCTIONS	NET PAY TO WORKER FOR ALL WORK
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												
							ST												
							OT												

CONTRACTOR FRINGE BENEFIT STATEMENT

Contract # /Project Name:	Contract Location:	Today's Date:
Contractor / Subcontractor Name:		Business Address:

In order that the proper Fringe Benefit rates can be verified when checking payrolls on the above contract, the hourly rates for fringe benefits, subsistence and/or travel allowance payment made for employees by the employer on the various classes of work are tabulated below. **Please Include Apprentice Rates.**

Classification:		Effective Date:	Subsistence or Travel Pay: \$ _____
EMPLOYER PAID FRINGE BENEFITS	Health & Welfare \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Pension \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Vacation/Holiday \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Training \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Other \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____

Classification:		Effective Date:	Subsistence or Travel Pay: \$ _____
EMPLOYER PAID FRINGE BENEFITS	Health & Welfare \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Pension \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Vacation/Holiday \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Training \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____
	Other \$ _____ hr	Paid To: Name of Plan/Fund/Program: _____ Address: _____	_____

Supplemental statements must be submitted during the progress of the work should there be an increase or change in rates. Use additional sheets as necessary. (Attach a copy of your most recent premium transmittal (including copy of check submitted) into each of the above plans/funds/programs or a letter from the above plans/funds/programs reflecting current payment status).

I certify under penalty of perjury that fringe benefits are paid to the approved plans, funds or programs as listed above.

Name and Title _____	Signature and Date (Wet Signature Required) _____
--------------------------------	---

Prevailing Wage Notification to Employee

4115.05: ...the contractor or subcontractor shall furnish each employee **NOT covered by a collective bargaining agreement** written notification of the job classification to which the employee is assigned, the prevailing wage determined to be applicable to that classification, separated into the hourly rate of pay and the fringe payments, and the identity of the prevailing wage coordinator appointed by the public authority. The contractor or subcontractor shall furnish the same notification to each affected employee every time the job classification of the employee is changed.

Project Name:	Project Number:
Contractor:	
Project Location:	

Prevailing Wage Coordinator	Employee
Public Authority:	Name:
Name of PWC:	Street:
Street:	City:
City:	State/Zip:
State:	Phone Number:
Zip:	Email:
Phone:	Last 4 Digits of SS#:

You will be performing work on this project that falls under these classifications. You will be paid the appropriate rate for the type of work you are performing.

Classification:	Prevailing Wage Rate Total Package:	Minus your fringe benefits*:	Your hourly base rate and overtime:
			/
			/
			/
			/
			/
			/

Hourly fringe benefits paid on your behalf by this company (Yearly amount the **company pays** divided by 2080):

Fringe	Amount	Fringe	Amount
Health Insurance		Vacation	
Life Pension		Holiday	
Pension		Sick Pay	
Other (Specify):		Training	
Other (Specify):		Total Hourly Fringes *	

Contractor's Signature:	Date:
Employee's Signature:	Date:

Certified payroll Report for Non-Performing Week

Owner:

Project:

Prime Contractor:

Subcontractor (if subcontractor report):

For week beginning on:

For week ending on:

Payroll Number:

Project Number:

CERTIFICATION FOR NON-PERFORMING WEEK

I, _____ (*Name of PWC*), the undersigned, am the Prevailing Wage Coordinator with the authority to act for and on behalf of _____ (*Company Name*), do hereby certify under penalty of perjury that no work was performed for the week referenced above.

Signature

Name, Prevailing Wage Coordinator

"General Decision Number: OH20260001 06/25/2026

State: Ohio

Construction Types: Heavy and Highway

Counties: Ohio Counties of
Adams, Allen, Ashland, Ashtabula,
Athens, Auglaize, Belmont, Brown,
Butler, Carroll, Champaign, Clark,
Clermont, Clinton, Columbiana,
Coshocton, Crawford, Cuyahoga, Darke,
Defiance, Delaware, Erie, Fairfield,
Fayette, Franklin, Fulton, Gallia,
Geauga, Greene, Guernsey, Hamilton,
Hancock, Hardin, Harrison, Henry,
Highland, Hocking, Holmes, Huron,
Jackson, Jefferson, Knox, Lake,
Lawrence, Licking, Logan, Lorain, Lucas,
Madison, Mahoning, Marion, Medina,
Meigs, Mercer, Miami, Monroe,
Montgomery, Morgan, Morrow, Muskingum,
Noble, Ottawa, Paulding, Perry,
Pickaway, Pike, Portage, Preble, Putnam,
Richland, Ross, Sandusky, Scioto,
Seneca, Shelby, Stark, Summit, Trumbull,
Tuscarawas, Union, Van Wert, Vinton,
Warren, Washington, Wayne, Williams,
Wood and Wyandot

Heavy Construction

Highway Construction

Modification Number	Publication Date
0	01/02/2026
1	05/18/2026
2	05/20/2026
3	06/25/2026

BROH001-001 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (DEFIANCE, FULTON (EXCLUDING FULTON, AMBOY & SWAN CREEK TOWNSHIPS), HENRY (EXCLUDING MONROE, BARTLOW, LIBERTY, WASHINGTON, RICHFIELD, MARION, DAMASCUS & TOWNSHIPS & THAT PART OF HARRISON TOWNSHIP OUTSIDE CORPORATE LIMITS OF CITY OF NAPOLEON), PAULDING, PUTNAM AND WILLIAMS COUNTIES).....	\$ 33.39	20.06

BROH001-004 06/01/2023		
	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER.....	\$ 32.40	19.30

BROH003-002 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (FULTON (TOWNSHIPS OF AMBOY, SWAN CREEK & FULTON), HENRY (TOWNSHIPS OF WASHINGTON, DAMASCUS, RICHFIELD, BARTLOW, LIBERTY, HARRISON, MONROE, & MARION), LUCAS AND WOOD (TOWNSHIPS OF PERRYSBURG, ROSS, LAKE, TROY, FREEDOM, MONTGOMERY, WEBSTER, CENTER, PORTAGE, MIDDLETON, PLAIN, LIBERTY, HENRY, WASHINGTON, WESTON, MILTON, JACKSON & GRAND RAPIDS) COUNTIES)...	\$ 33.39	20.06

BROH005-003 06/01/2020		
	Rates	Fringes
BRICKLAYER: BRICKLAYERS; CAULKERS; CLEANERS; POINTERS; & STONEMASONS (CUYAHOGA, LORAIN & MEDINA (HINCKLEY, GRANGER, BRUNSWICK, LIVERPOOL, MONTVILLE, YORK, HOMER, HARRISVILLE, CHATHAM,		

LITCHFIELD & SPENCER TOWNSHIPS AND THE CITY OF MEDINA)).....\$ 36.64	17.13
BRICKLAYER: SANDBLASTERS (CUYAHOGA, LORAIN & MEDINA (HINCKLEY, GRANGER, BRUNSWICK, LIVERPOOL, MONTVILLE, YORK, HOMER, HARRISVILLE, CHATHAM, LITCHFIELD & SPENCER TOWNSHIPS AND THE CITY OF MEDINA)).....\$ 36.39	17.13
BRICKLAYER: SEWER BRICKLAYERS & STACK BUILDERS (CUYAHOGA, LORAIN & MEDINA (HINCKLEY, GRANGER, BRUNSWICK, LIVERPOOL, MONTVILLE, YORK, HOMER, HARRISVILLE, CHATHAM, LITCHFIELD & SPENCER TOWNSHIPS AND THE CITY OF MEDINA)).....\$ 36.64	17.13
BRICKLAYER: SWING SCAFFOLDS (CUYAHOGA, LORAIN & MEDINA (HINCKLEY, GRANGER, BRUNSWICK, LIVERPOOL, MONTVILLE, YORK, HOMER, HARRISVILLE, CHATHAM, LITCHFIELD & SPENCER TOWNSHIPS AND THE CITY OF MEDINA)).....\$ 37.14	17.13

BROH0006-005 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (CARROLL, COLUMBIANA (KNOX, BUTLER, WEST & HANOVER TOWNSHIPS), STARK & TUSCARAWAS).....\$ 33.39	20.06

BROH0007-002 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (LAWRENCE).....\$ 33.39	20.06

BROH0007-005 06/01/2023	
Rates	Fringes
BRICKLAYER (PORTAGE & SUMMIT).....\$ 32.40	19.30

BROH0007-010 06/01/2024	
Rates	Fringes
MASON - STONE (PORTAGE & SUMMIT).....\$ 33.39	20.06

BROH0008-001 06/01/2024	
Rates	Fringes
BRICKLAYER (COLUMBIANA (SALEM, PERRY, FAIRFIELD, CENTER, ELK RUN, MIDDLETON, & UNITY TOWNSHIPS AND THE CITY OF NEW WATERFORD), MAHONING & TRUMBULL)....\$ 33.39	20.06

BROH0009-002 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (BELMONT & MONROE COUNTIES AND THE TOWNSHIPS OF WARREN & MT. PLEASANT AND THE VILLAGE OF DILLONVALE IN JEFFERSON COUNTY).....\$ 33.39	20.06
REFRACTORY (BELMONT & MONROE COUNTIES AND THE TOWNSHIPS OF WARREN & MT. PLEASANT AND THE VILLAGE OF DILLONVALE IN JEFFERSON COUNTY).....\$ 31.45	19.01

BROH0010-002 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (COLUMBIANA (ST. CLAIR, MADISON, WAYNE, FRANKLIN, WASHINGTON, YELLOW CREEK & LIVERPOOL TOWNSHIPS) & JEFFERSON (BRUSH CREEK & SALINE TOWNSHIPS)).....\$ 33.39	20.06

BROH0014-002 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (HARRISON & JEFFERSON (EXCEPT MT. PLEASANT, WARREN, BRUSH CREEK, SALINE & SALINEVILLE TOWNSHIPS & THE VILLAGE OF DILLONVALE)).\$ 33.39	20.06

BROH0016-002 06/01/2023	
Rates	Fringes
BRICKLAYER, STONEMASON (ASHTABULA, GEAUGA, AND LAKE COUNTIES).....\$ 32.40	19.30

BROH0018-002 06/01/2024	
Rates	Fringes
BRICKLAYER, STONEMASON (BROWN, BUTLER, CLERMONT,	

HAMILTON, PREBLE (GASPER, DIXON, ISRAEL, LANIER, SOMERS & GRATIS TOWNSHIPS) & WARREN COUNTIES:)	\$ 33.39	20.06

BROH0022-004 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (CHAMPAIGN, CLARK, CLINTON, DARKE, GREENE, HIGHLAND, LOGAN, MIAMI, MONTGOMERY, PREBLE (JACKSON, MONROE, HARRISON, TWIN, JEFFERSON & WASHINGTON TOWNSHIPS) AND SHELBY COUNTIES)	\$ 33.39	20.06

BROH0032-001 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (GALLIA & MEIGS)	\$ 33.39	20.06

BROH0035-002 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (ALLEN, AUGLAIZE, MERCER AND VAN WERT COUNTIES)	\$ 33.39	20.06

BROH0039-002 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (ADAMS & SCIOTO)	\$ 33.39	20.06

BROH0040-003 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (ASHLAND, CRAWFORD, HARDIN, HOLMES, MARION, MORROW, RICHLAND, WAYNE AND WYANDOT (EXCEPT CRAWFORD, RIDGE, RICHLAND & TYMOCHTEE TOWNSHIPS) COUNTIES) FOOTNOTE: LAYOUT MAN AND SAWMAN RATE: \$1.00 PER HOUR ABOVE JOURNEYMAN RATE. FREE STANDING STACK WORK GROUND LEVEL TO TOP OF STACK; SANDBLASTING AND LAYING OF CARBON MASONRY MATERIAL IN SWING STAGE AND/OR SCAFFOLD; RAMMING AND SPADING OF PLASTICS AND GUNNITING: \$1.50 PER HOUR ABOVE JOURNEYMAN RATE. ""HOT"" WORK: \$2.50 ABOVE JOURNEYMAN RATE	\$ 33.39	20.06

BROH0044-002 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (COSHOCOTON, FAIRFIELD, GUERNSEY, HOCKING, KNOX, KICKING, MORGAN, MUSKINGUM, NOBLE (BEAVER, BUFFALO, SENECA & WAYNE TOWNSHIPS) & PERRY COUNTIES:)	\$ 33.39	20.06

BROH0045-002 06/01/2023		
	Rates	Fringes
BRICKLAYER, STONEMASON (FAYETTE, JACKSON, PIKE, ROSS AND VINTON COUNTIES)	\$ 35.39	17.47

BROH0046-002 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (ERIE, HANCOCK, HURON, OTTAWA, SANDUSKY, SENECA, WOOD (PERRY & BLOOM TOWNSHIPS) AND WYANDOT (TYMOCHTEE, CRAWFORD, RIDGE & RICHLAND TOWNSHIPS) COUNTIES & THE ISLANDS OF LAKE ERIE NORTH OF SANDUSKY) FOOTNOTE: LAYOUT MAN AND SAWMAN RATE: \$1.00 PER HOUR ABOVE JOURNEYMAN RATE. FREE STANDING STACK WORK GROUND LEVEL TO TOP OF STACK; SANDBLASTING AND LAYING OF CARBON MASONRY MATERIAL IN SWING STAGE AND/OR SCAFFOLD; RAMMING AND SPADING OF PLASTICS AND GUNNITING: \$1.50 PER HOUR ABOVE JOURNEYMAN RATE. ""HOT"" WORK: \$2.50 ABOVE JOURNEYMAN RATE	\$ 33.39	20.06

BROH0052-001 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (ATHENS COUNTY)	\$ 33.39	20.06

BROH0052-003 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (NOBLE (BROOKFIELD, NOBLE, CENTER, SHARON, OLIVE, ENOCH, STOCK, JACKSON,		

JEFFERSON & ELK TOWNSHIPS) AND WASHINGTON COUNTIES).....	\$ 33.39	20.06

BROH0055-003 06/01/2024		
	Rates	Fringes
BRICKLAYER, STONEMASON (DELAWARE, FRANKLIN, MADISON, PICKAWAY AND UNION COUNTIES).....	\$ 33.39	20.06

CARP0002-024 05/01/2025		
	Rates	Fringes
CARPENTER & PILEDRIVERMEN (BROWN, BUTLER, CHAMPAIGN, CLARK, CLERMONT, CLINTON, DARKE, GREENE, HAMILTON, LOGAN, MIAMI, MONTGOMERY, PREBLE, SHELBY & WARREN).....	\$ 35.94	23.59
DIVER (BROWN, BUTLER, CHAMPAIGN, CLARK, CLERMONT, CLINTON, DARKE, GREENE, HAMILTON, LOGAN, MIAMI, MONTGOMERY, PREBLE, SHELBY & WARREN).....	\$ 40.58	9.69

CARP0171-001 05/01/2025		
	Rates	Fringes
CARPENTER (MAHONING & TRUMBULL).....	\$ 33.19	25.02

CARP0171-002 05/01/2025		
	Rates	Fringes
CARPENTER (BELMONT, COLUMBIANA, HARRISON, JEFFERSON & MONROE).....	\$ 32.50	26.19

CARP0200-002 05/01/2025		
	Rates	Fringes
CARPENTER (ADAMS, ATHENS, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, GALLIA, GUERNSEY, HIGHLAND, HOCKING, JACKSON, LAWRENCE, LICKING, MADISON, MARION, MEIGS, MORGAN, MUSKINGUM, NOBLE, PERRY, PICKAWAY, PIKE, ROSS, SCIOTO, UNION, VINTON AND WASHINGTON COUNTIES).....	\$ 35.94	23.59
DIVER (ADAMS, ATHENS, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, GALLIA, GUERNSEY, HIGHLAND, HOCKING, JACKSON, LAWRENCE, LICKING, MADISON, MARION, MEIGS, MORGAN, MUSKINGUM, NOBLE, PERRY, PICKAWAY, PIKE, ROSS, SCIOTO, UNION, VINTON AND WASHINGTON COUNTIES).....	\$ 39.41	10.40
PILEDRIVERMAN (ADAMS, ATHENS, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, GALLIA, GUERNSEY, HIGHLAND, HOCKING, JACKSON, LAWRENCE, LICKING, MADISON, MARION, MEIGS, MORGAN, MUSKINGUM, NOBLE, PERRY, PICKAWAY, PIKE, ROSS, SCIOTO, UNION, VINTON AND WASHINGTON COUNTIES).....	\$ 35.94	23.59

CARP0285-001 05/01/2025		
	Rates	Fringes
CARPENTER (CARROLL, STARK, TUSCARAWAS AND WAYNE)....	\$ 34.07	24.28

CARP0285-002 05/01/2025		
	Rates	Fringes
CARPENTER (COSHOCOTON, HOLMES, KNOX & MORROW).....	\$ 33.38	24.69

CARP0285-008 05/01/2025		
	Rates	Fringes
CARPENTER (MEDINA, PORTAGE & SUMMIT).....	\$ 37.18	25.07

CARP0351-005 05/01/2025		
	Rates	Fringes
CARPENTER (LUCAS & WOOD).....	\$ 35.44	27.56

CARP0351-006 05/01/2025		
	Rates	Fringes
CARPENTER (DEFIANCE, FULTON, HANCOCK, HENRY, PAULDING & WILLIAMS COUNTIES).....	\$ 32.05	26.13

CARP0372-002 05/01/2025		
	Rates	Fringes

CARPENTER (ALLEN, AUGLAIZE, HARDIN, MERCER, PUTNAM & VAN WERT).....	\$ 31.80	26.33

CARP0435-005 05/01/2025		
	Rates	Fringes
CARPENTER (ASHTABULA, CUYAHOGA, GEAUGA & LAKE).....	\$ 38.57	24.64

CARP0735-001 05/01/2025		
	Rates	Fringes
CARPENTER (ASHLAND, HURON & RICHLAND).....	\$ 34.67	23.57

CARP0735-002 05/01/2025		
	Rates	Fringes
CARPENTER (LORAIN).....	\$ 38.42	24.01

CARP0735-004 05/01/2025		
	Rates	Fringes
CARPENTER (ERIE).....	\$ 36.71	24.14

CARP0744-001 05/01/2025		
	Rates	Fringes
CARPENTER (CRAWFORD, OTTAWA, SANDUSKY, SENECA & WYANDOT).....	\$ 33.74	27.05

CARP1090-002 05/01/2025		
	Rates	Fringes
PILEDRIVERMEN & DIVER'S TENDER (ALLEN, AUGLAIZE, HARDIN, MERCER, PUTNAM, VAN WERT & WYANDOT) DIVERS - \$250.00 PER DAY.....	\$ 35.94	28.39

CARP1090-003 05/01/2025		
	Rates	Fringes
DIVER, WET (BELMONT, HARRISON, & MONROE).....	\$ 58.52	24.91
PILEDRIVERMEN; DIVER, DRY (BELMONT, HARRISON, & MONROE).....	\$ 39.01	24.91

CARP1090-004 05/01/2025		
	Rates	Fringes
DIVER, WET (CARROLL, STARK, TUSCARAWAS & WAYNE).....	\$ 49.82	25.40
PILEDRIVERMEN; DIVER, DRY (CARROLL, STARK, TUSCARAWAS & WAYNE).....	\$ 33.21	25.40

CARP1090-005 05/01/2025		
	Rates	Fringes
DIVER, WET (ASHLAND, ASHTABULA, CUYAHOGA, ERIE, GEAUGA, HURON, LAKE, LORAIN, MEDINA, PORTAGE, RICHLAND & SUMMIT).....	\$ 54.51	27.50
PILEDRIVERMEN; DIVER, DRY (ASHLAND, ASHTABULA, CUYAHOGA, ERIE, GEAUGA, HURON, LAKE, LORAIN, MEDINA, PORTAGE, RICHLAND & SUMMIT).....	\$ 36.34	27.50

CARP1090-006 05/01/2025		
	Rates	Fringes
DIVER, WET (COSHOCTON, HOLMES, KNOX & MORROW).....	\$ 54.36	22.54
PILEDRIVERMEN; DIVER, DRY (COSHOCTON, HOLMES, KNOX & MORROW).....	\$ 36.24	22.54

CARP1090-007 05/01/2025		
	Rates	Fringes
DIVER, WET (MAHONING & TRUMBULL).....	\$ 50.85	24.82
PILEDRIVERMEN; DIVER, DRY (MAHONING & TRUMBULL).....	\$ 33.90	24.82

CARP1090-008 05/01/2025		
	Rates	Fringes
PILEDRIVERMAN (COLUMBIANA & JEFFERSON).....	\$ 39.01	24.91

CARP1090-009 05/01/2025		
	Rates	Fringes
PILEDRIVERMEN & DIVER'S TENDER (CRAWFORD, DEFIANCE,		

FULTON, HANCOCK, HENRY, LUCAS, OTTAWA, PAULDING, SANDUSKY, SENECA, WILLIAMS & WOOD) DIVERS - \$250.00 PER DAY.....	\$ 37.98	28.63

ELEC0008-002 05/27/2024		
	Rates	Fringes
CABLE SPLICER (DEFIANCE, FULTON, HANCOCK, HENRY, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS & WOOD).....	\$ 38.98	18.96
ELECTRICIAN (DEFIANCE, FULTON, HANCOCK, HENRY, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS & WOOD).....	\$ 48.40	25.24

ELEC0032-003 06/01/2025		
	Rates	Fringes
ELECTRICIAN (ALLEN, AUGLAIZE, HARDIN, LOGAN, MERCER, SHELBY, VAN WERT & WYANDOT (CRAWFORD, JACKSON, MARSEILLES, MIFFLIN, RIDGELAND, RIDGE & SALEM TOWNSHIPS)).....	\$ 39.17	23.60

ELEC0038-002 04/28/2025		
	Rates	Fringes
ELECTRICIAN, EXCLUDING SOUND & COMMUNICATIONS WORK. (CUYAHOGA, GEAUGA (BAINBRIDGE, CHESTER & RUSSELL TOWNSHIPS) & LORAIN (COLUMBIA TOWNSHIP)) FOOTNOTES: A. 6 PAID HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. B. 1 WEEK'S PAID VACATION FOR 1 YEAR'S SERVICE; 2 WEEKS' PAID VACATION FOR 2 OR MORE YEARS' SERVICE.....	\$ 46.63	24.92

ELEC0038-008 04/28/2025		
	Rates	Fringes
SOUND & COMMUNICATION TECHNICIAN: COMMUNICATIONS TECHNICIAN (CUYAHOGA, GEAUGA (BAINBRIDGE, CHESTER & RUSSELL TOWNSHIPS) & LORAIN (COLUMBIA TOWNSHIP)) FOOTNOTES: A. 6 PAID HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. B. 1 WEEK'S PAID VACATION FOR 1 YEAR'S SERVICE; 2 WEEKS' PAID VACATION FOR 2 OR MORE YEARS' SERVICE.....	\$ 34.30	14.95
SOUND & COMMUNICATION TECHNICIAN: INSTALLER TECHNICIAN (CUYAHOGA, GEAUGA (BAINBRIDGE, CHESTER & RUSSELL TOWNSHIPS) & LORAIN (COLUMBIA TOWNSHIP)) FOOTNOTES: A. 6 PAID HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. B. 1 WEEK'S PAID VACATION FOR 1 YEAR'S SERVICE; 2 WEEKS' PAID VACATION FOR 2 OR MORE YEARS' SERVICE.....	\$ 33.05	14.91

ELEC0064-003 11/30/2025		
	Rates	Fringes
ELECTRICIAN (COLUMBIANA (BUTLER, FAIRFIELD, PERRY, SALEM & UNITY TOWNSHIPS) MAHONING (AUSTINTOWN, BEAVER, BERLIN, BOARDMAN, CANFIELD, ELLSWORTH, COITSVILLE, GOSHEN, GREEN, JACKSON, POLAND, SPRINGFIELD & YOUNGSTOWN TOWNSHIPS), & TRUMBULL (HUBBARD & LIBERTY TOWNSHIPS)).....	\$ 41.49	21.81

ELEC0071-005 01/06/2025		
	Rates	Fringes
LINE CONSTRUCTION: EQUIPMENT OPERATOR: DOT/TRAFFIC SIGNAL & HIGHWAY LIGHTING PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....	\$ 39.97	18.79
LINE CONSTRUCTION: EQUIPMENT OPERATOR: MUNICIPAL POWER/TRANSIT PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....	\$ 49.46	21.60
LINE CONSTRUCTION: GROUNDMAN: DOT/TRAFFIC SIGNAL & HIGHWAY LIGHTING PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....	\$ 31.10	16.40
LINE CONSTRUCTION: GROUNDMAN: MUNICIPAL POWER/TRANSIT PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....	\$ 38.47	18.64
LINE CONSTRUCTION: LINEMEN/CABLE SPLICER: DOT/TRAFFIC SIGNAL & HIGHWAY LIGHTING PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....	\$ 43.89	19.85

LINE CONSTRUCTION: LINEMEN/CABLE SPLICER: MUNICIPAL POWER/TRANSIT PROJECTS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE & LORAIN).....\$ 54.96			23.09

ELEC0071-010 01/06/2025			
	Rates	Fringes	
LINE CONSTRUCTION: EQUIPMENT OPERATOR	\$ 40.44	17.71	
LINE CONSTRUCTION: GROUNDMAN	\$ 29.07	14.97	
LINE CONSTRUCTION: LINEMAN & CABLE SPLICERS	\$ 46.02	19.04	

ELEC0082-002 12/02/2024			
	Rates	Fringes	
ELECTRICIAN (CLINTON, DARKE, GREENE, MIAMI, MONTGOMERY, PREBLE & WARREN (WAYNE, CLEAR CREEK & FRANKLIN TOWNSHIPS)).....	\$ 38.00	22.49	

ELEC0082-006 11/25/2024			
	Rates	Fringes	
SOUND & COMMUNICATION TECHNICIAN: CABLE PULLER (CLINTON, DARKE, GREENE, MIAMI, MONTGOMERY, PREBLE & WARREN (WAYNE, CLEAR CREEK & FRANKLIN TOWNSHIPS)).	\$ 13.85	5.30	
SOUND & COMMUNICATION TECHNICIAN: INSTALLER/TECHNICIAN (CLINTON, DARKE, GREENE, MIAMI, MONTGOMERY, PREBLE & WARREN (WAYNE, CLEAR CREEK & FRANKLIN TOWNSHIPS)).....	\$ 27.70	15.71	

ELEC0129-003 02/24/2025			
	Rates	Fringes	
ELECTRICIAN (LORAIN (EXCEPT COLUMBIA TOWNSHIP) & MEDINA (LITCHFIELD & LIVERPOOL TOWNSHIPS)).....	\$ 42.95	18.81	

ELEC0129-004 02/24/2025			
	Rates	Fringes	
ELECTRICIAN (ERIE & HURON (LYME, RIDGEFIELD, NORWALK, TOWNSEND, WAKEMAN, SHERMAN, PERU, BRONSON, HARTLAND, CLARKSFIELD, NORWICH, GREENFIELD, FAIRFIELD, FITCHVILLE & NEW LONDON TOWNSHIPS)).....	\$ 42.95	18.81	

ELEC0141-003 06/02/2025			
	Rates	Fringes	
CABLE SPLICER (BELMONT COUNTY).....	\$ 42.94	27.74	
ELECTRICIAN (BELMONT COUNTY).....	\$ 39.25	31.23	

ELEC0212-003 11/26/2018			
	Rates	Fringes	
SOUND & COMMUNICATION TECHNICIAN (BROWN, CLERMONT & HAMILTON).....	\$ 24.35	10.99	

ELEC0212-005 06/02/2025			
	Rates	Fringes	
ELECTRICIAN (BROWN, CLERMONT, AND HAMILTON COUNTIES).....	\$ 38.05	22.97	

ELEC0245-001 08/26/2024			
	Rates	Fringes	
LINE CONSTRUCTION: EQUIPMENT OPERATOR (ALLEN, HARDIN, VAN WERT & WYANDOT (CRAWFORD, JACKSON, MARSEILLES, MIFFLIN, RICHLAND, RIDGE & SALEM TOWNSHIPS)) FOOTNOTE: A. HALF DAY'S PAID HOLIDAY: THE LAST 4 HOURS OF THE WORKDAY PRIOR TO CHRISTMAS OR NEW YEAR'S DAY.....	\$ 32.95	17.08	
LINE CONSTRUCTION: GROUNDMAN TRUCK DRIVER (ALLEN, HARDIN, VAN WERT & WYANDOT (CRAWFORD, JACKSON, MARSEILLES, MIFFLIN, RICHLAND, RIDGE & SALEM TOWNSHIPS)): FOOTNOTE: A. HALF DAY'S PAID HOLIDAY: THE LAST 4 HOURS OF THE WORKDAY PRIOR TO CHRISTMAS OR NEW YEAR'S DAY.....	\$ 20.59	13.62	
LINE CONSTRUCTION: LINEMAN (ALLEN, HARDIN, VAN WERT & WYANDOT (CRAWFORD, JACKSON, MARSEILLES, MIFFLIN, RICHLAND, RIDGE & SALEM TOWNSHIPS)) FOOTNOTE: A. HALF DAY'S PAID HOLIDAY: THE LAST 4 HOURS OF THE WORKDAY PRIOR TO CHRISTMAS OR NEW YEAR'S DAY.....	\$ 47.07	21.03	

ELEC0245-003 01/01/2025

Rates

Fringes

LINE CONSTRUCTION: CABLE SPLICER (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) : FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 53.90 23.19

LINE CONSTRUCTION: GROUNDMAN/TRUCK DRIVER (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 20.51 13.84

LINE CONSTRUCTION: HELI-ARC WELDING (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 47.17 21.31

LINE CONSTRUCTION: LINEMAN (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 46.87 21.22

LINE CONSTRUCTION: OPERATOR - CLASS 1 (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 37.50 18.60

LINE CONSTRUCTION: OPERATOR - CLASS 2 (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 32.81 17.29

LINE CONSTRUCTION: TRAFFIC SIGNAL & LIGHTING TECHNICIAN (DEFIANCE, FULTON, HANCOCK, HENRY, HURON, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS, AND WOOD COUNTIES) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 42.18 19.91

ELEC0245-004 01/01/2025

Rates

Fringes

LINE CONSTRUCTION: CABLE SPLICER (ERIE COUNTY) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR

THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 53.90	23.19
LINE CONSTRUCTION: GROUNDMAN/TRUCK DRIVER (ERIE COUNTY) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 20.51	
13.84	
LINE CONSTRUCTION: LINEMAN (ERIE COUNTY) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 46.87	
21.22	
LINE CONSTRUCTION: OPERATOR - CLASS 1 (ERIE COUNTY) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 37.50	
18.60	
LINE CONSTRUCTION: OPERATOR - CLASS 2 (ERIE COUNTY) FOOTNOTE: A. 6 OBSERVED HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; INDEPENDENCE DAY; LABOR DAY; THANKSGIVING DAY; & CHRISTMAS DAY. EMPLOYEES WHO WORK ON A HOLIDAY SHALL BE PAID AT A RATE OF DOUBLE THEIR APPLICABLE CLASSIFIED STRAIGHT-TIME RATES FOR THE WORK PERFORMED ON SUCH HOLIDAY.....\$ 32.81	
17.29	

ELEC0246-001 10/28/2024

Rates

Fringes

ELECTRICIAN (CARROLL, COLUMBIANA, HARRISON AND JEFFERSON COUNTIES) FOOTNOTE: A. 1 1/2 PAID HOLIDAYS: THE LAST SCHEDULED WORKDAY PRIOR TO CHRISTMAS & 4 HOURS ON GOOD FRIDAY.....\$ 44.00	37.68
--	-------

ELEC0306-005 05/27/2024

Rates

Fringes

CABLE SPLICER (MEDINA (BRUNSWICK, CHATHAM, GRANGER, GUILFORD, HARRISVILLE, HINCKLEY, HOMER, LAFAYETTE, MEDINA, MONTVILLE, SHARON, SPENCER, WADSWORTH, WESTFIELD & YORK TOWNSHIPS), PORTAGE (ATWATER, AURORA, BRIMFIELD, DEERFIELD, FRANKLIN, MANTUA, RANDOLPH, RAVENNA, ROOTSTOWN, SHALERSVILLE, STREETSBORO & SUFFIELD TOWNSHIPS), SUMMIT & WAYNE (BAUGHMAN, CANAAN, CHESTER, CHIPPEWA, CONGRESS, GREEN, MILTON, & WAYNE TOWNSHIPS)).....\$ 46.81	20.95
ELECTRICIAN (MEDINA (BRUNSWICK, CHATHAM, GRANGER, GUILFORD, HARRISVILLE, HINCKLEY, HOMER, LAFAYETTE, MEDINA, MONTVILLE, SHARON, SPENCER, WADSWORTH, WESTFIELD & YORK TOWNSHIPS), PORTAGE (ATWATER, AURORA, BRIMFIELD, DEERFIELD, FRANKLIN, MANTUA, RANDOLPH, RAVENNA, ROOTSTOWN, SHALERSVILLE, STREETSBORO & SUFFIELD TOWNSHIPS), SUMMIT & WAYNE (BAUGHMAN, CANAAN, CHESTER, CHIPPEWA, CONGRESS, GREEN, MILTON, & WAYNE TOWNSHIPS)).....\$ 42.55	20.95

ELEC0317-002 06/02/2025

Rates

Fringes

CABLE SPLICER (GALLIA & LAWRENCE).....\$ 32.68	18.13
ELECTRICIAN (GALLIA & LAWRENCE).....\$ 41.15	29.35

ELEC0540-005 06/30/2025

Rates

Fringes

ELECTRICIAN (CARROLL (NORTHERN HALF, INCLUDING FOX, HARRISON, ROSE & WASHINGTON TOWNSHIPS), COLUMBIANA (KNOX TOWNSHIP), HOLMES, MAHONING (SMITH TOWNSHIP), STARK, TUSCARAWAS (NORTH OF AUBURN, CLAY, RUSH & YORK TOWNSHIPS), AND WAYNE (SOUTH OF BAUGHMAN, CHESTER, GREEN & WAYNE TOWNSHIPS) COUNTIES).....\$ 39.86	29.19
---	-------

ELEC0573-003 06/01/2025

Rates

Fringes

ELECTRICIAN (ASHTABULA (COLEBROOK, WAYNE, WILLIAMSFIELD, ORWELL & WINDSOR TOWNSHIPS), GEAUGA	
--	--

(AUBURN, MIDDLEFIELD, PARKMAN & TROY TOWNSHIPS), MAHONING (MILTON TOWNSHIP), PORTAGE (CHARLESTOWN, EDINBURG, FREEDOM, HIRAM, NELSON, PALMYRA, PARIS & WINDHAM TOWNSHIPS), AND TRUMBULL (EXCEPT LIBERTY & HUBBARD TOWNSHIPS)).....\$ 42.20			23.37

ELEC0575-001 05/29/2023			
	Rates	Fringes	
ELECTRICIAN (ADAMS, FAYETTE, HIGHLAND, HOCKING, JACKSON (BLOOMFIELD, FRANKLIN, HAMILTON, JEFFERSON, LICK, MADISON, SCIOTO, COAL, JACKSON, LIBERTY, MILTON & WASHINGTON TOWNSHIPS), PICKAWAY (DEER CREEK, PERRY, PICKAWAY, SALT CREEK & WAYNE TOWNSHIPS), PIKE (BEAVER, BENTON, JACKSON, MIFFLIN, PEBBLE, PEEPEE, PERRY, SEAL, CAMP CREEK, NEWTON, SCIOTO, SUNFISH, UNION & MARION TOWNSHIPS), ROSS, SCIOTO & VINTON (CLINTON, EAGLE, ELK, HARRISON, JACKSON, RICHLAND & SWAN TOWNSHIPS)).....\$ 37.00			22.26

ELEC0648-001 09/01/2025			
	Rates	Fringes	
CABLE SPLICER (BUTLER AND WARREN COUNTIES (DEERFIELD, HAMILTON, HARLAN, MASSIE, SALEM, TURTLE CREEK, UNION & WASHINGTON TOWNSHIPS)).....\$ 30.50			18.23
ELECTRICIAN (BUTLER AND WARREN COUNTIES (DEERFIELD, HAMILTON, HARLAN, MASSIE, SALEM, TURTLE CREEK, UNION & WASHINGTON TOWNSHIPS)).....\$ 38.00			24.16

ELEC0673-004 05/26/2025			
	Rates	Fringes	
CABLE SPLICER (ASHTABULA (EXCLUDING ORWELL, COLEBROOK, WILLIAMSFIELD, WAYNE & WINDSOR TOWNSHIPS), GEAUGA (BURTON, CHARDON, CLARIDON, HAMB DEN, HUNTSBURG, MONTVILLE, MUNSON, NEWBURY & THOMPSON TOWNSHIPS) AND LAKE COUNTIES)).....\$ 33.81			21.47
ELECTRICIAN (ASHTABULA (EXCLUDING ORWELL, COLEBROOK, WILLIAMSFIELD, WAYNE & WINDSOR TOWNSHIPS), GEAUGA (BURTON, CHARDON, CLARIDON, HAMB DEN, HUNTSBURG, MONTVILLE, MUNSON, NEWBURY & THOMPSON TOWNSHIPS) AND LAKE COUNTIES)).....\$ 41.17			24.58

ELEC0683-002 06/02/2025			
	Rates	Fringes	
CABLE SPLICER (CHAMPAIGN, CLARK, DELAWARE, FAIRFIELD, FRANKLIN, MADISON, PICKAWAY (CIRCLEVILLE, DARBY, HARRISON, JACKSON, MADISON, MONROE, MUHLENBERG, SCIOTO, WALNUT & WASHINGTON TOWNSHIPS), AND UNION COUNTIES)).....\$ 44.00			26.40
ELECTRICIAN (CHAMPAIGN, CLARK, DELAWARE, FAIRFIELD, FRANKLIN, MADISON, PICKAWAY (CIRCLEVILLE, DARBY, HARRISON, JACKSON, MADISON, MONROE, MUHLENBERG, SCIOTO, WALNUT & WASHINGTON TOWNSHIPS), AND UNION COUNTIES)).....\$ 43.00			26.37

ELEC0688-003 05/30/2022			
	Rates	Fringes	
ELECTRICIAN (ASHLAND, CRAWFORD, HURON (RICHMOND, NEW HAVEN, RIPLEY & GREENWICH TOWNSHIPS), KNOX (LIBERTY, CLINTON, UNION, HOWARD, MONROE, MIDDLEBERRY, MORRIS, WAYNE, BERLIN, PIKE, BROWN & JEFFERSON TOWNSHIPS), MARION, MORROW, RICHLAND AND WYANDOT (SYCAMORE, CRANE, EDEN, PITT, ANTRIM & TYMOCHTEE TOWNSHIPS) COUNTIES)).....\$ 32.30			21.83

ELEC0972-002 06/01/2024			
	Rates	Fringes	
CABLE SPLICER (ATHENS, MEIGS, MONROE, MORGAN, NOBLE, VINTON (BROWN, KNOX, MADISON, VINTON & WILKESVILLE TOWNSHIPS), AND WASHINGTON COUNTIES)...\$ 40.25			33.33
ELECTRICIAN (ATHENS, MEIGS, MONROE, MORGAN, NOBLE, VINTON (BROWN, KNOX, MADISON, VINTON & WILKESVILLE TOWNSHIPS), AND WASHINGTON COUNTIES)).....\$ 40.00			33.32

ELEC1105-001 05/27/2024			
	Rates	Fringes	

ELECTRICIAN (COSHOCOTON, GUERNSEY, KNOX (JACKSON, CLAY, MORGAN, MILLER, MILFORD, HILLIAR, BUTLER, HARRISON, PLEASANT & COLLEGE TOWNSHIPS), LICKING, MUSKINGUM, PERRY, AND TUSCARAWAS (AUBURN, YORK, CLAY, JEFFERSON, RUSH, OXFORD, WASHINGTON, SALEM, PERRY & BUCKS TOWNSHIPS) COUNTIES).....\$ 39.60 24.41

ENGI0018-003 05/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: GROUP 1- AIR COMPRESSOR ON STEEL ERECTION; BARRIER MOVING MACHINE; BOILER OPERATOR ON COMPRESSOR OR GENERATOR WHEN MOUNTED ON A RIG; CABLEWAY; COMBINATION CONCRETE MIXER & TOWER; CONCRETE PLANT (OVER 4 YD. CAPACITY); CONCRETE PUMP; CRANE (ALL TYPES, INCLUDING BOOM TRUCK, CHERRY PICKER); CRANE-COMPACT, TRACK OR RUBBER OVER 4,000 LBS. CAPACITY; CRANES-SELF ERECTING, STATIONARY, TRACK OR TRUCK (ALL CONFIGURATIONS); DERRICK; DRAGLINE; DREDGE (DIPPER, CLAM OR SUCTION); ELEVATING GRADER OR EUCLID LOADER; FLOATING EQUIPMENT (ALL TYPES); GRADALL; HELICOPTER CREW (OPERATOR-HOIST OR WINCH); HOE (ALL TYPES); HOISTING ENGINE ON SHAFT OR TUNNEL WORK; HYDRAULIC GANTRY (LIFTING SYSTEM); INDUSTRIAL-TYPE TRACTOR; JET ENGINE DRYER (D8 OR D9) DIESEL TRACTOR; LOCOMOTIVE (STANDARD GAUGE); MAINTENANCE OPERATOR CLASS A; MIXER, PAVING (SINGLE OR DOUBLE DRUM); MUCKING MACHINE; MULTIPLE SCRAPER; PILEDRIVING MACHINE (ALL TYPES); POWER SHOVEL; PRENTICE LOADER; QUAD 9 (DOUBLE PUSHER); RAIL TAMPER (WITH AUTO LIFTING & ALIGNING DEVICE); REFRIGERATING MACHINE (FREEZER OPERATION); ROTARY DRILL, ON CAISSON WORK; ROUGH TERRAIN FORK LIFT WITH WINCH/HOIST; SIDE-BOOM; SLIP-FORM PAVER; TOWER DERRICK; TREE SHREDDER; TRENCH MACHINE (OVER 24" WIDE); TRUCK MOUNTED CONCRETE PUMP; TUG BOAT; TUNNEL MACHINE AND/OR MINING MACHINE; WHEEL EXCAVATOR; AND ASPHALT PLANT ENGINEER (CLEVELAND DISTRICT ONLY). (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).....\$ 45.63 16.41

POWER EQUIPMENT OPERATOR: GROUP 2- ASPHALT PAVER; AUTOMATIC SUBGRADER MACHINE, SELF-PROPELLED (CMI TYPE); BOBCAT TYPE AND/OR SKID STEER LOADER WITH HOE ATTACHMENT GREATER THAN 7,000 LBS.; BORING MACHINE MORE THAN 48"; BULLDOZER; ENDLOADER; HORIZONTAL DIRECTIONAL DRILL (OVER 50,000 FT LBS THRUST); HYDRO MILLING MACHINE; KOLMAN-TYPE LOADER (PRODUCTION TYPE-DIRT); LEAD GREASEMAN; LIGHTING & TRAFFIC SIGNAL INSTALLATION EQUIPMENT (INCLUDES ALL GROUPS OR CLASSIFICATIONS); MATERIAL TRANSFER EQUIPMENT (SHUTTLE BUGGY) ASPHALT; PETTIBONE-RAIL EQUIPMENT; POWER GRADER; POWER SCRAPER; PUSH CAT; ROTOMILL (ALL), GRINDERS & PLANERS OF ALL TYPES; TRENCH MACHINE (24" WIDE & UNDER); VERMEER TYPE CONCRETE SAW; AND MAINTENANCE OPERATORS (PORTAGE AND SUMMIT COUNTIES ONLY). (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).....\$ 45.53 16.41

POWER EQUIPMENT OPERATOR: GROUP 3- A-FRAME; AIR COMPRESSOR ON TUNNEL WORK (LOW PRESSURE); ASPHALT PLANT ENGINEER (PORTAGE AND SUMMIT COUNTIES ONLY); BOBCAT-TYPE AND/OR SKID STEER LOADER WITH OR WITHOUT ATTACHMENTS; HIGHWAY DRILLS (ALL TYPES); LOCOMOTIVE (NARROW GAUGE); MATERIAL HOIST/ELEVATOR; MIXER, CONCRETE (MORE THAN ONE BAG CAPACITY); MIXER, ONE BAG CAPACITY (SIDE LOADER); POWER BOILER (OVER 15 LBS. PRESSURE) PUMP OPERATOR INSTALLING & OPERATING WELL POINTS; PUMP (4" & OVER DISCHARGE); ROLLER, ASPHALT; ROTOVATOR (LIME SOIL STABILIZER); SWITCH & TIE TAMPERS (WITHOUT LIFTING & ALIGNING DEVICE); UTILITY OPERATOR (SMALL EQUIPMENT); WELDING MACHINES; AND RAILROAD TIE INSERTER/REMOVER; ARTICULATING/STRAIGHT BED END DUMPS IF ASSIGNED (MINUS \$4.00 PER HOUR). (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).....\$ 44.49 16.41

POWER EQUIPMENT OPERATOR: GROUP 4- BACKFILLER; BALLAST RE-LOCATOR; BARS, JOINT & MESH INSTALLING MACHINE; BATCH PLANT; BORING MACHINE OPERATOR (48" OR LESS); BULL FLOATS; BURLAP & CURING MACHINE;

CONCRETE PLANT (CAPACITY 4 YD. & UNDER); CONCRETE SAW (MULTIPLE); CONVEYOR (HIGHWAY); CRUSHER; DECKHAND; FARM-TYPE TRACTOR WITH ATTACHMENTS (HIGHWAY); FINISHING MACHINE; FIREPERSON, FLOATING EQUIPMENT (ALL TYPES); FORKLIFT; FORM TRENCHER; HYDRO HAMMER EXPECT MASONARY; HYDRO SEEDER; PAVEMENT BREAKER; PLANT MIXER; POST DRIVER; POST HOLE DIGGER (POWER AUGER); POWER BRUSH BURNER; POWER FORM HANDLING EQUIPMENT; ROAD WIDENING TRENCHER; ROLLER (BRICK, GRADE & MACADAM); SELF-PROPELLED POWER SPREADER; SELF-PROPELLED POWER SUBGRADER; STEAM FIREPERSON; TRACTOR (PULLING SHEEPFOOT, ROLLER OR GRADER); AND VIBRATORY COMPACTOR WITH INTEGRAL POWER. (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).....\$ 43.27 16.41

POWER EQUIPMENT OPERATOR: GROUP 5- COMPRESSOR (PORTABLE, SEWER, HEAVY & HIGHWAY); DRUM FIREPERSON (ASPHALT PLANT); GENERATOR; MASONRY FORK LIFT; INBOARD-OUTBOARD MOTOR BOAT LAUNCH; OIL HEATER (ASPHALT PLANT); OILER/HELPER; POWER DRIVEN HEATER; POWER SWEEPER & SCRUBBER; PUMP (UNDER 4" DISCHARGE); SIGNALPERSON; TIRE REPAIRPERSON; VAC/ALLS; CRANES - COMPACT, TRACK OR RUBBER UNDER 4,000 POUND CAPACITY; FUELING AND GREASING; AND CHAINMEN. (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).\$ 37.98 16.41

POWER EQUIPMENT OPERATOR: GROUP 6- MASTER MECHANIC & BOOM FROM 150 TO 180. (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).....\$ 46.63 16.41

POWER EQUIPMENT OPERATOR: GROUP 7- BOOM FROM 180 AND OVER. (ASHTABULA, CUYAHOGA, ERIE, GEAUGA, LAKE, LORAIN, MEDINA, PORTAGE, AND SUMMIT COUNTIES).\$ 46.63 16.41

ENGI0018-004 05/01/2024

Rates

Fringes

POWER EQUIPMENT OPERATOR: GROUP 1- AIR COMPRESSOR ON STEEL ERECTION; BARRIER MOVING MACHINE; BOILER OPERATOR ON COMPRESSOR OR GENERATOR WHEN MOUNTED ON A RIG; CABLEWAY; COMBINATION CONCRETE MIXER & TOWER; CONCRETE PLANT (OVER 4 YD. CAPACITY); CONCRETE PUMP; CRANE (ALL TYPES, INCLUDING BOOM TRUCK, CHERRY PICKER); CRANE-COMPACT, TRACK OR RUBBER OVER 4,000 LBS. CAPACITY; CRANES-SELF ERECTING, STATIONARY, TRACK OR TRUCK (ALL CONFIGURATIONS); DERRICK; DRAGLINE; DREDGE (DIPPER, CLAM, OR SUCTION); ELEVATING GRADER OR EUCLID LOADER; FLOATING EQUIPMENT (ALL TYPES); GRADALL; HELICOPTER CREW (OPERATOR-HOIST OR WINCH); HOE (ALL TYPES); HOISTING ENGINE ON SHAFT OR TUNNEL WORK; HYDRAULIC GANTRY (LIFTING SYSTEM); INDUSTRIAL-TYPE TRACTOR; JET ENGINE DRYER (D8 OR D9) DIESEL TRACTOR; LOCOMOTIVE (STANDING GAUGE); MAINTENANCE OPERATOR CLASS A; MIXER, PAVING (SINGLE OR DOUBLE DRUM); MUCKING MACHINE; MULTIPLE SCRAPER; PILEDRIVING MACHINE (ALL TYPES); POWER SHOVEL; PRENTICE LOADER; QUAD 9 (DOUBLE PUSHER); RAIL TAMPER (WITH AUTO LIFTING & ALIGNING DEVICE); REFRIGERATING MACHINE (FREEZER OPERATION); ROTARY DRILL, ON CAISSON WORK; ROUGH TERRAIN FORK LIFT WITH WINCH/HOIST; SIDE-BOOM; SLIP-FORM PAVER; TOWER DERRICK; TREE SHREDDER; TRENCH MACHINE (OVER 24" WIDE); TRUCK MOUNTED CONCRETE PUMP; TUG BOAT; TUNNEL MACHINE AND/OR MINING MACHINE; AND WHEEL EXCAVATOR. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 44.14 16.41

POWER EQUIPMENT OPERATOR: GROUP 2- ASPHALT PAVER;

AUTOMATIC SUBGRADER MACHINE, SELF-PROPELLED (CMI TYPE); BOBCAT TYPE AND/OR SKID STEER LOADER WITH HOE ATTACHMENT GREATER THAN 7,000 LBS.' BORING MACHINE MORE THAN 48"; BULLDOZER; ENDLOADER; HYDRO MILLING MACHING; HORIZONTAL DIRECTIONAL DRILL (OVER 50,000 FT. LBS. THRUST); KOLMAN-TYPE LOADER (PRODUCTION TYPE-DIRT); LEAD GREASEMAN; LIGHTING & TRAFFIC SIGNAL INSTALLATION EQUIPMENT (INCLUDES ALL GROUPS OR CLASSIFICATIONS); MATERIAL TRANSFER EQUIPMENT (SHUTTLE BUGGY); ASPHALT; PETTIBONE-RAIL EQUIPMENT; POWER GRADER; POWER SCRAPER; PUSH CAT; ROTOMILL (ALL), GRINDERS & PLANERS OF ALL TYPES; TRENCH MACHINE (24" WIDE & UNDER); AND VERMEER TYPE CONCRETE SAW. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 44.02 16.41

POWER EQUIPMENT OPERATOR: GROUP 3- A-FRAME; AIR COMPRESOR ON TUNNEL WORK (LOW PRESSURE); ASPHALT PLANT ENGINEER; BOBCAT-TYPE AND/OR SKID STEER LOADER WITH OR WITHOUT ATTACHMENTS; HIGHWAY DRILLS (ALL TYPES); LOCOMOTIVE (NARROW GAUGE); MATERIAL HOIST/ELEVATOR; MIXER, CONCRETE (MORE THAN ONE BAG CAPACITY); MIXER, ONE BAG CAPACITY (SIDE LOADER); POWER BOILER (OVER 15 LBS. PRESSURE) PUMP OPERATOR INSTALLING & OPERATING WELL POINTS; PUMP (4" & OVER DISCHARGE); RAILROAD TIE INSERTER/REMOVER; ROLLER, ASPHALT; ROTOVATOR (LIME SOIL STABILIZER); SWITCH & TIE TAMPERS (WITHOUT LIFTING & ALIGNING DEVICE); UTILITY OPERATOR (SMALL EQUIPMENT); AND WELDING MACHINES; ARTICULATING/STRAIGHT BED END DUMPS IF ASSIGNED (MINUS \$4.00 PER HOUR). (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 42.98 16.41

POWER EQUIPMENT OPERATOR: GROUP 4- BACKFILLER; BALLAST RE-LOCATOR; BARS, JOINT & MESH INSTALLING MACHINE; BATCH PLANT; BORING MACHINE OPERATOR (48" OR LESS); BULL FLOATS; BURLAP & CURING MACHINE; CONCRETE PLANT (CAPACITY 4 YD. & UNDER); CONCRETE SAW (MULTIPLE); CONVEYOR (HIGHWAY); CRUSHER: DECKAHND: FARM-TYPE TRACTOR WITH ATTACHMENTS (HIGHWAY); FINISHING MACHINE; FIREPERSON, FLOATING EQUIPMENT (ALL TYPES); FORK LIFT; FORM TRENCHER; HYDRO HAMMER EXCEPT MASONARY; HYDRO SEEDER; PAVEMENT BREAKER; PLANT MIXER; POST DRIVER; POST HOLE DIGGER (POWER AUGER); POWER BRUSH BURNER; POWER FORM HANDLING EQUIPMENT; ROAD WIDENING TRENCHER; ROLLER (BRICK, GRADE, & MACADAM); SELF-PROPELLED POWER SPREADER; SELF-PROPELLED POWER SUBGRADER; STEAM FIREPERSON; TRACTOR (PULLING SHEEPFOOT, ROLLER, OR GRADER); AND VIBRATORY COMPACTOR WITH INTEGRAL POWER. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN,

LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 41.80	16.41
POWER EQUIPMENT OPERATOR: GROUP 5- COMPRESSOR (PORTABLE, SEWER, HEAVY & HIGHWAY); DRUM FIREPERSON (ASPHALT PLANT); GENERATOR; MASONARY FORKLIFT; INBOARD-OUTBOARD MOTOR BOAT LAUNCH; OIL HEATER (ASPHALT PLANT); OILER/HELPER; POWER DRIVEN HEATER; POWER SWEEPER & SCRUBBER; PUMP (UNDER 4" DISCHARGE); SIGNALPERSON; TIRE REPAIRPERSON; VAC/ALLS; CRANES-COMPACT, TRACK, OR RUBBER UNDER 4,000 POUND CAPACITY; FUELING AND GREASING; AND CHAINMEN. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 36.34	16.41
POWER EQUIPMENT OPERATOR: GROUP 6- MASTER MECHANIC & BOOM FROM 150 TO 180. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 45.14	16.41
POWER EQUIPMENT OPERATOR: GROUP 7- BOOM FROM 180 AND OVER. (ADAMS, ALLEN, ASHLAND, ATHENS, AUGLAIZE, BELMONT, BROWN, BUTLER, CARROLL, CHAMPAIGN, CLARK, CLERMONT, CLINTON, COSHOCTON, CRAWFORD, DARKE, DEFIANCE, DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, FULTON, GALLIA, GREENE, GUERNSEY, HAMILTON, HANCOCK, HARDIN, HARRISON, HENRY, HIGHLAND, HOCKING, HOLMES, HURON, JACKSON, JEFFERSON, KNOX, LAWRENCE, LICKING, LOGAN, LUCAS, MADISON, MARION, MEIGS, MERCER, MIAMI, MONROE, MONTGOMERY, MORGAN, MORROW, MUSKINGUM, NOBLE, OTTAWA, PAULDING, PERRY, PICKAWAY, PIKE, PREBLE, PUTNAM, RICHLAND, ROSS, SANDUSKY, SCIOTO, SENECA, SHELBY, STARK, TUSCARAWAS, UNION, VAN WERT, VINTON, WARREN, WASHINGTON, WAYNE, WILLIAMS, WOOD, AND YANDOT COUNTIES).....\$ 45.14	16.41

ENGI0066-023 06/01/2023	
	Rates
POWER EQUIPMENT OPERATOR: ALL OTHER WORK GROUP 1- RIG, PILE DRIVER OR CAISSON TYPE; & RIG, PILE HYDRAULIC UNIT ATTACHED. (COLUMBIANA, MAHONING & TRUMBULL COUNTIES).....\$ 37.19	24.30
POWER EQUIPMENT OPERATOR: ALL OTHER WORK GROUP 2 - ASPHALT HEATER PLANER; BACKFILLER WITH DRAG ATTACHMENT; BACKHOE; BACKHOE WITH SHEAR ATTACHED; BACKHOE-REAR PIVOTAL SWING; BATCH PLANT-CENTRAL MIX CONCRETE; BATCH PLANT, PORTABLE CONCRETE; BERM BUILDER-AUTOMATIC; BOAT DERRICK; BOAT-TUG; BORING MACHINE ATTACHED TO TRACTOR; BULLCLAM; VULLDOZER; C.M.I. ROAD BUILDER & SIMILAR TYPE; CABLE PLACER & LATYER; CARRIER-STRADDLE; CARRYALL-SCRAPER OR SCOPP; CHICAGO BOOM; COMPACTOR WITH BLAD ATTACHED; CONCRETE SAW (VERMEER OR SIMILAR TYPE); CONCRETE	

SPREADER FINISHER; COMBINATION, BIDWELL MACHINE;
 CRANE; CRANE-ELECTRIC OVERHEAD; CRANE-ROUGH
 TERRAIN; CRANE-SIDE BOOM; CRANE-TRUCK; CRANE-TOWER;
 DERRICK-BOOM; DERRICK-CAR; DIGGER -WHEEL (NOT
 TRENCHER OR ROAD WIDENER); DOUBLE NINE; DRAG LINE;
 DREDGE; DRILL-KENNY OR SIMILAR TYPE; EASY POUR
 MEDIAN BARRIER MACHINE (OR SIMILAR TYPE);
 ELECTROMATIC; FRANKIE PILE; GRADALL; GRADER; GURRY;
 SELF-PROPELLED; HEAVY EQUIPMENT ROBOTICS
 OPERATOR/MECHANIC; HOIST-MONORAIL; HOIST-STATIONARY
 & MOBILE TRACTOR; HOIST, 2 OR 3 DRUM; HORIZONTAL
 DIRECTIONAL DRILL OPERATOR; JACKALL; JUMBO MACHINE;
 KOCAL & KUHLMAN; LAND-SEAGOING VEHICLE; LOADER,
 ELEVATING; LOADER, FRONT END; LOADER, SKID STEER;
 LOCOMOTIVE; MECHANIC/WELDER; METRO CHIP HARVESTER
 WITH BOO; MUCKING MACHINE; PAVER-ASPHALT FINISHING
 MACHINE; PAVER-ROAD CONCRETE; PAVER-SLIP FORM
 (C.M.I. OR SIMILAR); PLACE CRETE MACHINE WITH BOOM;
 POST DRIVER (CARRIER MOUNTED); POWER DRIVEN
 HYDRAULIC PUMP & JACK (WHEN USED IN SLIP FORM OR
 LIFT SLAB CONSTRUCTION); PUMP CRETE MACHINE;
 REGULATOR-BALLAST; HYRAULIC POWER UNIT NOT ATTACHED
 TO RIG FOR PILE DRILLINGS; RIGS-DRILLING; ROTO MILL
 OR SIMILAR FULL LANE (8' WIDE & OVER); ROTO MILL OR
 SIMILAR TYPE (UNDER 8'); SHOVEL; SLIP FORM CURB
 MACHINE; SPEEDWING; SPIKEMASTER; STONECRUSHER; TIE
 PULLER & LOADER; TIE TAMPER; TRACTOR-DOUBLE BOOM;
 TRACTOR WITH ATTACHMENTS; TRUCK-BOOM; TRUCK-TIRE;
 TRENCH MACHINE; TUNNEL MACHINE (MARK 21 JAVA OR
 SIMILAR) & WHIRLEY (OR SIMILAR TYPE) (COLUMBIANA,
 MAHONING & TRUMBULL COUNTIES).....\$ 36.92 24.30
 POWER EQUIPMENT OPERATOR: ALL OTHER WORK GROUP 3 -
 ASPHALT PLANT; BENDING MACHINE (PIPELINE OR TYPE);
 BORING MACHINE, MOTOR DRIVEN; CHIP HARVESTER
 WITHOUT BOOM; CLEANING MACHINE, PIPELINE TYPE;
 COATING MACHINE, PIPELINE TYPE; COMPACTOR; CONCRETE
 BELT PLACER; CONCRETE FINISHER; CONCRETE PLANER OR
 ASPHALT; CONCRETE SPREADER; ELEVATOR; FORK LIFT
 (HOME BUILDING ONLY); FORK LIFT & LULLS; FORK LIFT
 WALK BEHIND (HOISTING OVER 1 BUCK HIGH); FORM LINE
 MACHINE; GREASE TRUCK OPERATOR; GROUT PUMP; GUNNITE
 MACHINE; HORIZONTAL DIRECTIONAL DRILL LOCATOR;
 SINGLE DRUM HOIST WITH OR WITHOUT TOWER; HUCK
 BOLTING MACHINE; HYDRAULIC SCAFFOLD (HOISTING
 BUILDING MATERIALS); PAVING BREAKER (SELF=PROPELLED
 OR RIDDEN); PIPE DREAM; POT FIREPERSON (POWER
 AGITATED); REFRIGERATION PLANT; ROAD WIDENER;
 ROLLER; SASGEN DERRICK; SEEDING MACHINE; SOIL
 STABILIZER (PUMP TYPE); SPRAY CURE MACHINE,
 SELF-PROPELLED; STRAW BLOWER MACHINE; SUB-GRADER;
 TUBE FINISHER OR BROOM C.M.I. OR SIMILAR TYPE; &
 TUGGER HOIST. (COLUMBIANA, MAHONING & TRUMBULL
 COUNTIES).....\$ 32.06 24.30
 POWER EQUIPMENT OPERATOR: ALL OTHER WORK GROUP 4 -
 AIR CURTAIN DESTRUCTOR & SIMILAR TYPE; BATCH
 PLANT-JOB RELATED; BOILER OPERATOR; COMPRESSOR;
 CONVEYOR; CURB BUILDER, SELF-PROPELLED; DRILL
 WAGON; GENERATOR SET; GENERATOR-STEAM;
 HEATER-PORTABLE POWER; HYDRAULIC MANIPLATOR CRANE;
 JACK-HYDRAULIC POWER DRIVEN; JACK-HYRAULIC
 (RAILROAD); LADAVATOR; MINOR MACHINE OPERATOR;
 MIXER-CONCRETE; MULCHING MACHINE; PIN PULLER; POWER
 BROOM; PULVERIZER; PUMP; ROAD FINISHING MAHINC
 (PULL TYPE); SAW-CONCRETE-SELF-PROPELLED (HIGHWAY
 WORK); SIGNAL PERSON; SPRAY CURE MACHINE-MOTOR
 POWERED; STUMP CUTTER; TRACTOR; TRENCHER FORM;
 WATER BLASTER; STEAM JENNY; SYPHON;
 VIBRATOR-GASOLINE; & WELDING MACHINE. (COLUMBIANA,
 MAHONING & TRUMBULL COUNTIES).....\$ 28.77 24.30
 POWER EQUIPMENT OPERATOR: ALL OTHER WORK GROUP 5 -
 BRAKEPERSON; FIREPERSON; & OILER. (COLUMBIANA,
 MAHONING & TRUMBULL COUNTIES).....\$ 25.94 24.30
 POWER EQUIPMENT OPERATOR: ASBESTOS; HAZARDOUS/TOXIC
 WASTE PROJECTS GROUP 1 - A & B- RIG, PILE DRIVER
 OR CAISSON TYPE; & RIG, PILE HYDRAULIC UNIT
 ATTACHED. (COLUMBIANA, MAHONING & TRUMBULL
 COUNTIES).....\$ 44.63 24.30
 POWER EQUIPMENT OPERATOR: ASBESTOS; HAZARDOUS/TOXIC
 WASTE PROJECTS GROUP 2 - A & B - ASPHALT HEATER
 PLANER; BACKFILLER WITH DRAG ATTACHMENT; BACKHOE;
 BACKHOE WITH SHEAR ATTACHED; BACKHOE-REAR PIVOTAL
 SWING; BATCH PLANT-CENTRAL MIX CONCRETE; BATCH

PLANT, PORTABLE CONCRETE; BERM BUILDER-AUTOMATIC;
 BOAT DERRICK; BOAT-TUG; BORING MACHINE ATTACHED TO
 TRACTOR; BULLCLAM; VULLDOZER; C.M.I. ROAD BUILDER &
 SIMILAR TYPE; CABLE PLACER &LATYER;
 CARRIER-STRADDLE; CARRYALL-SCRAPER OR SCOPP;
 CHICAGO BOOM; COMPACTOR WITH BLAD ATTACHED;
 CONCRETE SAW (VERMEER OR SIMILAR TYPE); CONCRETE
 SPREADER FINISHER; COMBINATION, BIDWELL MACHINE;
 CRANE; CRANE-ELECTRIC OVERHEAD; CRANE-ROUGH
 TERRAIN; CRANE-SIDE BOOM; CRANE-TRUCK; CRANE-TOWER;
 DERRICK-BOOM; DERRICK-CAR; DIGGER -WHEEL (NOT
 TRENCHER OR ROAD WIDENER); DOUBLE NINE; DRAG LINE;
 DREDGE; DRILL-KENNY OR SIMILAR TYPE; EASY POUR
 MEDIAN BARRIER MACHINE (OR SIMILAR TYPE);
 ELECTROMATIC; FRANKIE PILE; GRADALL; GRADER; GURRY;
 SELF-PROPELLED; HEAVY EQUIPMENT ROBOTICS
 OPERATOR/MECHANIC; HOIST-MONORAIL; HOIST-STATIONARY
 & MOBILE TRACTOR; HOIST, 2 OR 3 DRUM; HORIZONTAL
 DIRECTIONAL DRILL OPERATOR; JACKALL; JUMBO MACHINE;
 KOCAL & KUHLMAN; LAND-SEAGOING VEHICLE; LOADER,
 ELEVATING; LOADER, FRONT END; LOADER, SKID STEER;
 LOCOMOTIVE; MECHANIC/WELDER; METRO CHIP HARVESTER
 WITH BOO; MUCKING MACHINE; PAVER-ASPHALT FINISHING
 MACHINE; PAVER-ROAD CONCRETE; PAVER-SLIP FORM
 (C.M.I. OR SIMILAR); PLACE CRETE MACHINE WITH BOOM;
 POST DRIVER (CARRIER MOUNTED); POWER DRIVEN
 HYDRAULIC PUMP & JACK (WHEN USED IN SLIP FORM OR
 LIFT SLAB CONSTRUCTION); PUMP CRETE MACHINE;
 REGULATOR-BALLAST; HYRAULIC POWER UNIT NOT ATTACHED
 TO RIG FOR PILE DRILLINGS; RIGS-DRILLING; ROTO MILL
 OR SIMILAR FULL LANE (8' WIDE & OVER); ROTO MILL OR
 SIMILAR TYPE (UNDER 8'); SHOVEL; SLIP FORM CURB
 MACHINE; SPEEDWING; SPIKEMASTER; STONECRUSHER; TIE
 PULLER & LOADER; TIE TAMPER; TRACTOR-DOUBLE BOOM;
 TRACTOR WITH ATTACHMENTS; TRUCK-BOOM; TRUCK-TIRE;
 TRENCH MACHINE; TUNNEL MACHINE (MARK 21 JAVA OR
 SIMILAR) & WHIRLEY (OR SIMILAR TYPE) (COLUMBIANA,
 MAHONING & TRUMBULL COUNTIES).....\$ 44.30 24.30
 POWER EQUIPMENT OPERATOR: ASBESTOS; HAZARDOUS/TOXIC
 WASTE PROJECTS GROUP 3 - A & B - ASPHALT PLANT;
 BENDING MACHINE (PIPELINE OR TYPE); BORING MACHINE,
 MOTOR DRIVEN; CHIP HARVESTER WITHOUT BOOM; CLEANING
 MACHINE, PIPELINE TYPE; COATING MACHINE, PIPELINE
 TYPE; COMPACTOR; CONCRETE BELT PLACER; CONCRETE
 FINISHER; CONCRETE PLANER OR ASPHALT; CONCRETE
 SPREADER; ELEVATOR; FORK LIFT (HOME BUILDING ONLY);
 FORK LIFT & LULLS; FORK LIFT WALK BEHIND (HOISTING
 OVER 1 BUCK HIGH); FORM LINE MACHINE; GREASE TRUCK
 OPERATOR; GROUT PUMP; GUNNITE MACHINE; HORIZONTAL
 DIRECTIONAL DRILL LOCATOR; SINGLE DRUM HOIST WITH
 OR WITHOUT TOWER; HUCK BOLTING MACHINE; HYDRAULIC
 SCAFFOLD (HOISTING BUILDING MATERIALS); PAVING
 BREAKER (SELF=PROPELLED OR RIDDEN); PIPE DREAM; POT
 FIREPERSON (POWER AGITATED); REFRIGERATION PLANT;
 ROAD WIDENER; ROLLER; SASGEN DERRICK; SEEDING
 MACHINE; SOIL STABILIZER (PUMP TYPE); SPRAY CURE
 MACHINE, SELF-PROPELLED; STRAW BLOWER MACHINE;
 SUB-GRADER; TUBE FINISHER OR BROOM C.M.I. OR
 SIMILAR TYPE; & TUGGER HOIST(COLUMBIANA, MAHONING
 & TRUMBULL COUNTIES).....\$ 38.47 24.30
 POWER EQUIPMENT OPERATOR: ASBESTOS; HAZARDOUS/TOXIC
 WASTE PROJECTS GROUP 4 - A & B - AIR CURTAIN
 DESTRUCTOR & SIMILAR TYPE; BATCH PLANT-JOB RELATED;
 BOILER OPERATOR; COMPRESSOR; CONVEYOR; CURB
 BUILDER, SELF-PROPELLED; DRILL WAGON; GENERATOR
 SET; GENERATOR-STEAM; HEATER-PORTABLE POWER;
 HYDRAULIC MANIUPULATOR CRANE; JACK-HYDRAULIC POWER
 DRIVEN; JACK-HYARAULIC (RAILROAD); LADAVATOR; MINOR
 MACHINE OPERATOR; MIXER-CONCRETE; MULCHING MACHINE;
 PIN PULLER; POWER BROOM; PULVERIZER; PUMP; ROAD
 FINISHING MAHINC (PULL TYPE);
 SAW-CONCRETE-SELF-PROPELLED (HIGHWAY WORK); SIGNAL
 PERSON; SPRAY CURE MACHINE-MOTOR POWERED; STUMP
 CUTTER; TRACTOR; TRENCHER FORM; WATER BLASTER;
 STEAM JENNY; SYPHON; VIBRATOR-GASOLINE; & WELDING
 MACHINE. (COLUMBIANA, MAHONING & TRUMBULL
 COUNTIES).....\$ 34.52 24.30
 POWER EQUIPMENT OPERATOR: ASBESTOS; HAZARDOUS/TOXIC
 WASTE PROJECTS GROUP 5 - A & B - BRAKEPERSON;
 FIREPERSON; & OILER. (COLUMBIANA, MAHONING &
 TRUMBULL COUNTIES).....\$ 31.13 24.30
 POWER EQUIPMENT OPERATOR: HAZARDOUS/TOXIC WASTE

PROJECTS GROUP 1 - C & D - RIG, PILE DRIVER OR
CAISSON TYPE; & RIG, PILE HYDRAULIC UNIT ATTACHED.
(COLUMBIANA, MAHONING & TRUMBULL COUNTIES).....\$ 40.91 24.30
POWER EQUIPMENT OPERATOR: HAZARDOUS/TOXIC WASTE
PROJECTS GROUP 2 - C & D - ASPHALT HEATER PLANER;
BACKFILLER WITH DRAG ATTACHMENT; BACKHOE; BACKHOE
WITH SHEAR ATTACHED; BACKHOE-REAR PIVOTAL SWING;
BATCH PLANT-CENTRAL MIX CONCRETE; BATCH PLANT,
PORTABLE CONCRETE; BERM BUILDER-AUTOMATIC; BOAT
DERRICK; BOAT-TUG; BORING MACHINE ATTACHED TO
TRACTOR; BULLCLAM; VULLDOZER; C.M.I. ROAD BUILDER &
SIMILAR TYPE; CABLE PLACER & LATYER;
CARRIER-STRADDLE; CARRYALL-SCRAPER OR SCOPP;
CHICAGO BOOM; COMPACTOR WITH BLAD ATTACHED;
CONCRETE SAW (VERMEER OR SIMILAR TYPE); CONCRETE
SPREADER FINISHER; COMBINATION, BIDWELL MACHINE;
CRANE; CRANE-ELECTRIC OVERHEAD; CRANE-ROUGH
TERRAIN; CRANE-SIDE BOOM; CRANE-TRUCK; CRANE-TOWER;
DERRICK-BOOM; DERRICK-CAR; DIGGER -WHEEL (NOT
TRENCHER OR ROAD WIDENER); DOUBLE NINE; DRAG LINE;
DREDGE; DRILL-KENNY OR SIMILAR TYPE; EASY POUR
MEDIAN BARRIER MACHINE (OR SIMILAR TYPE);
ELECTROMATIC; FRANKIE PILE; GRADALL; GRADER; GURRY;
SELF-PROPELLED; HEAVY EQUIPMENT ROBOTICS
OPERATOR/MECHANIC; HOIST-MONORAIL; HOIST-STATIONARY
& MOBILE TRACTOR; HOIST, 2 OR 3 DRUM; HORIZONTAL
DIRECTIONAL DRILL OPERATOR; JACKALL; JUMBO MACHINE;
KOCAL & KUHLMAN; LAND-SEAGOING VEHICLE; LOADER,
ELEVATING; LOADER, FRONT END; LOADER, SKID STEER;
LOCOMOTIVE; MECHANIC/WELDER; METRO CHIP HARVESTER
WITH BOO; MUCKING MACHINE; PAVER-ASPHALT FINISHING
MACHINE; PAVER-ROAD CONCRETE; PAVER-SLIP FORM
(C.M.I. OR SIMILAR); PLACE CRETE MACHINE WITH BOOM;
POST DRIVER (CARRIER MOUNTED); POWER DRIVEN
HYDRAULIC PUMP & JACK (WHEN USED IN SLIP FORM OR
LIFT SLAB CONSTRUCTION); PUMP CRETE MACHINE;
REGULATOR-BALLAST; HYRAULIC POWER UNIT NOT ATTACHED
TO RIG FOR PILE DRILLINGS; RIGS-DRILLING; ROTO MILL
OR SIMILAR FULL LANE (8' WIDE & OVER); ROTO MILL OR
SIMILAR TYPE (UNDER 8'); SHOVEL; SLIP FORM CURB
MACHINE; SPEEDWING; SPIKEMASTER; STONECRUSHER; TIE
PULLER & LOADER; TIE TAMPER; TRACTOR-DOUBLE BOOM;
TRACTOR WITH ATTACHMENTS; TRUCK-BOOM; TRUCK-TIRE;
TRENCH MACHINE; TUNNEL MACHINE (MARK 21 JAVA OR
SIMILAR) & WHIRLEY (OR SIMILAR TYPE) (COLUMBIANA,
MAHONING & TRUMBULL COUNTIES).....\$ 40.61 24.30
POWER EQUIPMENT OPERATOR: HAZARDOUS/TOXIC WASTE
PROJECTS GROUP 3 - C & D - ASPHALT PLANT; BENDING
MACHINE (PIPELINE OR TYPE); BORING MACHINE, MOTOR
DRIVEN; CHIP HARVESTER WITHOUT BOOM; CLEANING
MACHINE, PIPELINE TYPE; COATING MACHINE, PIPELINE
TYPE; COMPACTOR; CONCRETE BELT PLACER; CONCRETE
FINISHER; CONCRETE PLANER OR ASPHALT; CONCRETE
SPREADER; ELEVATOR; FORK LIFT (HOME BUILDING ONLY);
FORK LIFT & LULLS; FORK LIFT WALK BEHIND (HOISTING
OVER 1 BUCK HIGH); FORM LINE MACHINE; GREASE TRUCK
OPERATOR; GROUT PUMP; GUNNITE MACHINE; HORIZONTAL
DIRECTIONAL DRILL LOCATOR; SINGLE DRUM HOIST WITH
OR WITHOUT TOWER; HUCK BOLTING MACHINE; HYDRAULIC
SCAFFOLD (HOISTING BUILDING MATERIALS); PAVING
BREAKER (SELF=PROPELLED OR RIDDEN); PIPE DREAM; POT
FIREPERSON (POWER AGITATED); REFRIGERATION PLANT;
ROAD WIDENER; ROLLER; SASGEN DERRICK; SEEDING
MACHINE; SOIL STABILIZER (PUMP TYPE); SPRAY CURE
MACHINE, SELF-PROPELLED; STRAW BLOWER MACHINE;
SUB-GRADER; TUBE FINISHER OR BROOM C.M.I. OR
SIMILAR TYPE; & TUGGER HOIST(COLUMBIANA, MAHONING
& TRUMBULL COUNTIES).....\$ 35.27 24.30
POWER EQUIPMENT OPERATOR: HAZARDOUS/TOXIC WASTE
PROJECTS GROUP 4 - C & D - AIR CURTAIN DESTRUCTOR
& SIMILAR TYPE; BATCH PLANT-JOB RELATED; BOILER
OPERATOR; COMPRESSOR; CONVEYOR; CURB BUILDER,
SELF-PROPELLED; DRILL WAGON; GENERATOR SET;
GENERATOR-STEAM; HEATER-PORTABLE POWER; HYDRAULIC
MANIUPULATOR CRANE; JACK-HYDRAULIC POWER DRIVEN;
JACK-HYARAULIC (RAILROAD); LADAVATOR; MINOR MACHINE
OPERATOR; MIXER-CONCRETE; MULCHING MACHINE; PIN
PULLER; POWER BROOM; PULVERIZER; PUMP; ROAD
FINISHING MAHINC (PULL TYPE);
SAW-CONCRETE-SELF-PROPELLED (HIGHWAY WORK); SIGNAL
PERSON; SPRAY CURE MACHINE-MOTOR POWERED; STUMP
CUTTER; TRACTOR; TRENCHER FORM; WATER BLASTER;

STEAM JENNY; SYPHON; VIBRATOR-GASOLINE; & WELDING MACHINE. (COLUMBIANA, MAHONING & TRUMBULL COUNTIES).....	\$ 31.65	24.30
POWER EQUIPMENT OPERATOR: HAZARDOUS/TOXIC WASTE PROJECTS GROUP 5 - C & D - BRAKEPERSON; FIREPERSON; & OILER. (COLUMBIANA, MAHONING & TRUMBULL COUNTIES).....	\$ 28.53	24.30

IRON0017-002 05/01/2024

Rates

Fringes

IRONWORKER: ORNAMENTAL, REINFORCING, & STRUCTURAL (ASHTABULA (NORTH OF ROUTE 6, STARTING AT THE GEauga COUNTY LINE, PROCEEDING EAST TO STATE ROUTE 45), CUYAHOGA, ERIE (EASTERN 2/3), GEauga, HURON (EAST OF A LINE DRAWN FROM THE NORTH BORDER THROUGH MONROEVILLE & WILLARD), LAKE, LORAIN, MEDINA (NORTH OF OLD RTE. #224), PORTAGE (WEST OF A LINE FROM MIDDLEFIELD TO SHALERSVILLE TO DEERFIELD), AND SUMMIT (NORTH OF OLD RTE. #224, INCLUDING CITY LIMITS OF BARBERTON) COUNTIES).....	\$ 36.83	29.01
---	----------	-------

IRON0017-010 05/01/2024

Rates

Fringes

IRONWORKER: STRUCTURAL, INCLUDING METAL BUILDING ERECTION & REINFORCING (ASHTABULA (EASTERN PART FROM LAKE ERIE ON THE NORTH TO ROUTE #322 ON THE SOUTH TO INCLUDE CONNEAUT, KINGSVILLE, SHEFFIELD, DENMARK, DORSET, CHERRY VALLEY, WAYNE, MONROE, PIERPONT, RICHMOND, ANDOVER & WILLIAMSFIELD TOWNSHIPS)).....	\$ 36.83	29.01
---	----------	-------

IRON0044-001 06/01/2025

Rates

Fringes

IRONWORKER, REINFORCING (ADAMS (WESTERN PART), BROWN, BUTLER (SOUTHERN PART), CLERMONT, CLINTON (SOUTH OF A LINE DRAWN FROM BLANCHESTER TO LYNCHBURG), HAMILTON, HIGHLAND (EXCLUDING EASTERN ONE-FIFTH & PORTION OF COUNTY INSIDE LINES DRAWN FROM MARSHALL TO LYNCHBURG FROM THE NORTHERN COUNTY LINE THROUGH E. MONROE TO MARSHALL) AND WARREN (SOUTH OF A LINE DRAWN FROM BLANCHESTER THROUGH MORROW TO THE WEST COUNTY LINE) COUNTIES).....	\$ 38.27	23.90
---	----------	-------

IRON0044-002 06/01/2025

Rates

Fringes

IRONWORKER: FENCE ERECTOR (CLINTON (SOUTH OF A LINE DRAWN FROM BLANCHESTER TO LYNCHBURG), HAMILTON, HIGHLAND (EXCLUDING EASTERN ONE-FIFTH & PORTION OF COUNTY INSIDE LINES DRAWN FROM MARSHALL TO LYNCHBURG FROM THE NORTHERN COUNTY LINE THROUGH E. MONROE TO MARSHALL) & WARREN (SOUTH OF A LINE DRAWN FROM BLANCHESTER THROUGH MORROW TO THE WEST COUNTY LINE)).....	\$ 35.88	23.90
IRONWORKER: ORNAMENTAL; STRUCTURAL (CLINTON (SOUTH OF A LINE DRAWN FROM BLANCHESTER TO LYNCHBURG), HAMILTON, HIGHLAND (EXCLUDING EASTERN ONE-FIFTH & PORTION OF COUNTY INSIDE LINES DRAWN FROM MARSHALL TO LYNCHBURG FROM THE NORTHERN COUNTY LINE THROUGH E. MONROE TO MARSHALL) & WARREN (SOUTH OF A LINE DRAWN FROM BLANCHESTER THROUGH MORROW TO THE WEST COUNTY LINE)).....	\$ 37.77	23.90

IRON0055-003 07/01/2024

Rates

Fringes

IRONWORKER: ALL OTHER WORK (CRAWFORD (AREA BETWEEN LINES DRAWN FROM WHERE HWY #598 & #30 MEET THROUGH N. LIBERTY TO THE NORTHERN BORDER & FROM SAID HWY JUNCTION POINT DUE WEST TO THE BORDER), DEFIANCE (S. OF A LINE DRAWN FROM WHERE RTE. #66 MEETS THE NORTHERN LINE THROUGH INDEPENDENCE TO THE EASTERN COUNTY BORDER), ERIE (WESTERN 1/3), FULTON, HANCOCK, HARDIN (NORTH OF A LINE DRAWN FROM MAYSVILLE TO A POINT 4 MILES SOUTH OF THE NORTHERN LINE ON THE EASTERN LINE), HENRY, HURON (WEST OF A.....	\$ 29.77	21.30
IRONWORKER: FENCE ERECTOR (CRAWFORD (AREA BETWEEN LINES DRAWN FROM WHERE HWY #598 & #30 MEET		

THROUGH N. LIBERTY TO THE NORTHERN BORDER & ;
 FROM SAID HWY JUNCTION POINT DUE WEST TO THE
 BORDER), DEFIANCE (S. OF A LINE DRAWN FROM WHERE
 RTE. #66 MEETS THE NORTHERN LINE THROUGH
 INDEPENDENCE TO THE EASTERN COUNTY BORDER), ERIE
 (WESTERN 1/3), FULTON, HANCOCK, HARDIN (NORTH OF A
 LINE DRAWN FROM MAYSVILLE TO A POINT 4 MILES SOUTH
 OF THE NORTHERN LINE ON THE EASTERN LINE), HENRY,
 HURON (WEST OF A.....\$ 29.77 21.30
 IRONWORKER: FLAT ROAD MESH (CRAWFORD (AREA BETWEEN
 LINES DRAWN FROM WHERE HWY #598 & ; #30 MEET
 THROUGH N. LIBERTY TO THE NORTHERN BORDER & ;
 FROM SAID HWY JUNCTION POINT DUE WEST TO THE
 BORDER), DEFIANCE (S. OF A LINE DRAWN FROM WHERE
 RTE. #66 MEETS THE NORTHERN LINE THROUGH
 INDEPENDENCE TO THE EASTERN COUNTY BORDER), ERIE
 (WESTERN 1/3), FULTON, HANCOCK, HARDIN (NORTH OF A
 LINE DRAWN FROM MAYSVILLE TO A POINT 4 MILES SOUTH
 OF THE NORTHERN LINE ON THE EASTERN LINE), HENRY,
 HURON (WEST OF A.....\$ 26.40 24.62
 IRONWORKER: TUNNES & CAISSONS UNDER PRESSURE
 (CRAWFORD (AREA BETWEEN LINES DRAWN FROM WHERE HWY
 #598 & ; #30 MEET THROUGH N. LIBERTY TO THE
 NORTHERN BORDER & ; FROM SAID HWY JUNCTION POINT
 DUE WEST TO THE BORDER), DEFIANCE (S. OF A LINE
 DRAWN FROM WHERE RTE. #66 MEETS THE NORTHERN LINE
 THROUGH INDEPENDENCE TO THE EASTERN COUNTY BORDER),
 ERIE (WESTERN 1/3), FULTON, HANCOCK, HARDIN (NORTH
 OF A LINE DRAWN FROM MAYSVILLE TO A POINT 4 MILES
 SOUTH OF THE NORTHERN LINE ON THE EASTERN LINE),
 HENRY, HURON (WEST OF A.....\$ 35.50 29.20

IRON0147-002 06/01/2025

Rates

Fringes

IRONWORKER (ALLEN (NORTHERN HALF), DEFIANCE
 (NORTHERN PART, EXCLUDING SOUTH OF A LINE DRAWN
 FROM WHERE RTE. #66 MEETS THE NORTHERN LINE THROUGH
 INDEPENDENCE TO THE EASTERN COUNTY BORDER), MERCER
 (NORTHERN HALF), PAULDING, PUTNAM (WESTERN PART,
 EXCLUDING EAST OF A LINE DRAWN FROM THE NORTHERN
 BORDER DOWN THROUGH MILLER CITY TO WHERE #696 MEETS
 THE SOUTHERN BORDER), VAN WERT, AND WILLIAMS
 (WESTERN PART, EXCLUDING EAST OF A LINE DRAWN FROM
 PIONEER THROUGH STRYKER TO THE SOUTHERN BORDER)
 COUNTIES).....\$ 38.00 26.39

IRON0172-002 06/01/2025

Rates

Fringes

IRONWORKER (CHAMPAIGN (EASTERN ONE-THIRD), CLARK
 (EASTERN ONE-FOURTH), COSHOCTON (WEST OF A LINE
 BEGINNING AT THE NORTHWESTERN COUNTY LINE GOING
 THROUGH WALHONDING & ; TUNNEL HILL TO THE
 SOUTHERN COUNTY LINE), CRAWFORD (SOUTH OF RTE.
 #30), DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN,
 HARDIN (EXCLUDING A LINE DRAWN FROM ROUNDHEAD TO
 MAYSVILLE), HIGHLAND (EASTERN ONE-FIFTH), HOCKING,
 JACKSON (NORTHERN HALF), KNOX, LICKING, LOGAN
 (EASTERN ONE-THIRD), MADISON, MARION, MORROW,
 MUSKINGUM (WEST OF A LINE.....\$ 40.87 23.15

IRON0207-004 06/01/2025

Rates

Fringes

IRONWORKER: LAYOUT; SHEETER (ASHTABULA (SOUTHERN
 PART STARTING AT THE GEAUGA COUNTY LINE),
 COLUMBIANA (E. OF A LINE FROM DAMASCUS TO
 HIGHLANDTOWN), MAHONING (N. OF OLD ROUTE #224),
 PORTAGE (E. OF A LINE FROM MIDDLEFIELD TO
 SHALERSVILLE TO DEERFIELD) & TRUMBULL).....\$ 37.26 28.16
 IRONWORKER: ORNAMENTAL; REINFORCING; STRUCTURAL
 (ASHTABULA (SOUTHERN PART STARTING AT THE GEAUGA
 COUNTY LINE), COLUMBIANA (E. OF A LINE FROM
 DAMASCUS TO HIGHLANDTOWN), MAHONING (N. OF OLD
 ROUTE #224), PORTAGE (E. OF A LINE FROM MIDDLEFIELD
 TO SHALERSVILLE TO DEERFIELD) & TRUMBULL).....\$ 36.26 28.16

IRON0290-002 06/01/2025

Rates

Fringes

IRONWORKER (ALLEN (SOUTHERN HALF), AUGLAIZE, BUTLER

(NORTH OF A LINE DRAWN FROM EAST TO THE WEST COUNTY LINE GOING THROUGH OXFORD, DARRTOWN & WOODSDALE), CHAMPAIGN (EXCLUDING EAST OF A LINE DRAWN FROM CATAWLA TO THE POINT WHERE #68 INTERSECTS THE NORTHERN COUNTY LINE), CLARK (WESTERN TWO-THIRDS), CLINTON (EXCLUDING SOUTH OF A LINE DRAWN FROM BLANCHESTER TO LYNCHBURG), DARKE, GREENE, HIGHLAND (INSIDE LINES DRAWN FROM MARSHALL TO LYNCHBURG & FROM THE NORTHERN COUNTY LINE THROUGH EA.....\$ 37.39 25.35

IRON0549-003 12/01/2022

Rates

Fringes

IRONWORKER (BELMONT, GUERNSEY, HARRISON, JEFFERSON, MONROE & MUSKINGUM (EXCLUDING PORTION WEST OF A LINE STARTING AT ADAMS MILL GOING TO ADAMSVILLE AND GOING FROM ADAMSVILLE THROUGH BLUE ROCK TO THE SOUTH BORDER)).....\$ 35.19 25.66

IRON0550-004 05/01/2024

Rates

Fringes

IRONWORKERS: STRUCTURAL, ORNAMENTAL AND REINFORCING (ASHLAND, CARROLL, COLUMBIANA (W. OF A LINE FROM DAMASCUS TO HIGHLANDTOWN), COSHOCTON (E. OF A LINE BEGINNING AT NW CO. LINE GOING THROUGH WALHONDING & TUNNEL HILL TO THE SOUTH CO. LINE), HOLMES, HURON (S. OF OLD RTE. #224), MAHONING (S. OF OLD RTE. #224), MEDINA (S. OF OLD RTE. #224), PORTAGE (S. OF OLD RTE. #224), RICHLAND, STARK, SUMMIT (S. OF OLD RTE. #224, EXCLUDING CITY LIMITS OF BARBERTON), TUSCARAWAS, & WAYNE).....\$ 34.70 22.88

IRON0769-004 06/01/2025

Rates

Fringes

IRONWORKER (ADAMS (EASTERN HALF), GALLIA, JACKSON (SOUTHERN HALF), LAWRENCE & SCIOTO).....\$ 39.70 29.59

IRON0787-003 06/01/2025

Rates

Fringes

IRONWORKER (ATHENS, MEIGS, MORGAN, NOBLE, AND WASHINGTON COUNTIES).....\$ 36.10 24.65

LAB00265-008 05/01/2024

Rates

Fringes

LABORER GROUP 1- ASPHALT LABORER; CARPENTER TENDER; CONCRETE CURING APPLICATOR; DUMP MAN (BATCH TRUCK); GUARDRAIL AND FENCE INSTALLER; JOINT SETTER; LABORER (CONSTRUCTION); LANDSCAPE LABORER; MESH HANDLERS & PLACER; RIGHT-OF-WAY LABORER; RIPRAP LABORER & GROUTER; SCAFFOLD ERECTOR; SEAL COATING; SURFACE TREATMENT OR ROAD MIX LABORER; SIGN INSTALLER; SLURRY SEAL; UTILITY MAN; BRIDGE MAN; HANDYMAN; WATERPROOFING LABORER; FLAGPERSON; HAZARDOUS WASTE (LEVEL D); DIVER TENDER; ZONE PERSON & TRAFFIC CONTROL (REMAINING COUNTIES OF OHIO) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING....\$ 35.52 14.45
LABORER GROUP 1- ASPHALT LABORER; CARPENTER TENDER; CONCRETE CURING APPLICATOR; DUMP MAN (BATCH TRUCK); GUARDRAIL AND FENCE INSTALLER; JOINT SETTER; LABORER (CONSTRUCTION); LANDSCAPE LABORER; MESH HANDLERS & PLACER; RIGHT-OF-WAY LABORER; RIPRAP LABORER & GROUTER; SCAFFOLD ERECTOR; SEAL COATING; SURFACE TREATMENT OR ROAD MIX LABORER; SIGN INSTALLER; SLURRY SEAL; UTILITY MAN; BRIDGE MAN; HANDYMAN; WATERPROOFING LABORER; FLAGPERSON; HAZARDOUS WASTE (LEVEL D); DIVER TENDER; ZONE PERSON & TRAFFIC CONTROL (CUYAHOGA, GEAUGA & LAKE COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING....\$ 37.18 14.45
LABORER GROUP 1- ASPHALT LABORER; CARPENTER TENDER; CONCRETE CURING APPLICATOR; DUMP MAN (BATCH TRUCK); GUARDRAIL AND FENCE INSTALLER; JOINT SETTER;

LABORER (CONSTRUCTION); LANDSCAPE LABORER; MESH HANDLERS & PLACER; RIGHT-OF-WAY LABORER; RIPRAP LABORER & GROUTER; SCAFFOLD ERECTOR; SEAL COATING; SURFACE TREATMENT OR ROAD MIX LABORER; SIGN INSTALLER; SLURRY SEAL; UTILITY MAN; BRIDGE MAN; HANDYMAN; WATERPROOFING LABORER; FLAGPERSON; HAZARDOUS WASTE (LEVEL D); DIVER TENDER; ZONE PERSON & TRAFFIC CONTROL (ASHTABULA, ERIE, HURON, LORAIN, LUCAS, MAHONING, MEDINA, OTTAWA, PORTAGE, SANDUSKY, STARK, SUMMIT, TRUMBULL & WOOD COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....\$ 35.95 14.45

LABORER GROUP 2- ASPHALT RAKER; CONCRETE PUDDLER; KETTLE MAN PIPELINE); MACHINE DRIVEN TOOLS (GAS, ELECTRIC, AIR); MASON TENDER; BRICK PAVER; MORTAR MIXER; POWER BUGGY OR POWER WHEELBARROW; PAINT STRIPER; SHEETING & SHORING MAN; SURFACE GRINDER MAN; PLASTIC FUSING MACHINE OPERATOR; PUG MILL OPERATOR; & VACUUM DEVICES (WET OR DRY); RODDING MACHINE OPERATOR; DIVER; SCREWMAN OR PAVER; SCREED PERSON; WATER BLAST, HAND HELD WAND; PUMPS 4" & UNDER (GAS, AIR OR ELECTRIC) & HAZARDOUS WASTE (LEVEL C); AIR TRACK AND WAGON DRILL; BOTTOM PERSON; COFFERDAM (BELOW 25 FT. DEEP); CONCRETE SAW PERSON; CUTTING WITH BURNING TORCH; FORM SETTER; HAND SPIKER (RAILROAD); PIPELAYER; TUNNEL LABORER (WITHOUT AIR) & CAISSON; UNDERGROUND PERSON (WORKING IN SEWER AND WATERLINE, CLEANING, REPAIRING & RECONDITIONING); SANDBLASTER NOZZLE PERSON; & HAZARDOUS WASTE (LEVEL B) (REMAINING COUNTIES OF OHIO) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....\$ 35.69 14.45

LABORER GROUP 2- ASPHALT RAKER; CONCRETE PUDDLER; KETTLE MAN PIPELINE); MACHINE DRIVEN TOOLS (GAS, ELECTRIC, AIR); MASON TENDER; BRICK PAVER; MORTAR MIXER; POWER BUGGY OR POWER WHEELBARROW; PAINT STRIPER; SHEETING & SHORING MAN; SURFACE GRINDER MAN; PLASTIC FUSING MACHINE OPERATOR; PUG MILL OPERATOR; & VACUUM DEVICES (WET OR DRY); RODDING MACHINE OPERATOR; DIVER; SCREWMAN OR PAVER; SCREED PERSON; WATER BLAST, HAND HELD WAND; PUMPS 4" & UNDER (GAS, AIR OR ELECTRIC) & HAZARDOUS WASTE (LEVEL C); AIR TRACK AND WAGON DRILL; BOTTOM PERSON; COFFERDAM (BELOW 25 FT. DEEP); CONCRETE SAW PERSON; CUTTING WITH BURNING TORCH; FORM SETTER; HAND SPIKER (RAILROAD); PIPELAYER; TUNNEL LABORER (WITHOUT AIR) & CAISSON; UNDERGROUND PERSON (WORKING IN SEWER AND WATERLINE, CLEANING, REPAIRING & RECONDITIONING); SANDBLASTER NOZZLE PERSON; & HAZARDOUS WASTE (LEVEL B) (CUYAHOGA, GEauga & LAKE COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....\$ 37.35 14.45

LABORER GROUP 2- ASPHALT RAKER; CONCRETE PUDDLER; KETTLE MAN PIPELINE); MACHINE DRIVEN TOOLS (GAS, ELECTRIC, AIR); MASON TENDER; BRICK PAVER; MORTAR MIXER; POWER BUGGY OR POWER WHEELBARROW; PAINT STRIPER; SHEETING & SHORING MAN; SURFACE GRINDER MAN; PLASTIC FUSING MACHINE OPERATOR; PUG MILL OPERATOR; & VACUUM DEVICES (WET OR DRY); RODDING MACHINE OPERATOR; DIVER; SCREWMAN OR PAVER; SCREED PERSON; WATER BLAST, HAND HELD WAND; PUMPS 4" & UNDER (GAS, AIR OR ELECTRIC) & HAZARDOUS WASTE (LEVEL C); AIR TRACK AND WAGON DRILL; BOTTOM PERSON; COFFERDAM (BELOW 25 FT. DEEP); CONCRETE SAW PERSON; CUTTING WITH BURNING TORCH; FORM SETTER; HAND SPIKER (RAILROAD); PIPELAYER; TUNNEL LABORER (WITHOUT AIR) & CAISSON; UNDERGROUND PERSON (WORKING IN SEWER AND WATERLINE, CLEANING, REPAIRING & RECONDITIONING); SANDBLASTER NOZZLE PERSON; & HAZARDOUS WASTE (LEVEL B) (ASHTABULA, ERIE, HURON, LORAIN, LUCAS, MAHONING, MEDINA, OTTAWA, PORTAGE, SANDUSKY, STARK, SUMMIT, TRUMBULL & WOOD COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL

PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.	\$ 36.12	14.45
LABORER GROUP 3- BLASTER; MUCKER; POWDER PERSON; TOP LANDER; WRENCHER (MECHANICAL JOINTS & UTILITY PIPELINE); YARNER; HAZARDOUS WASTE (LEVEL A); CONCRETE SPECIALIST; CONCRETE CREW IN TUNNELS (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); CURB SETTER & CUTTER; GRADE CHECKER; UTILITY PIPELINE TAPPER; WATERLINE; AND CAULKER (REMAINING COUNTIES OF OHIO) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING....		
	\$ 36.02	14.45
LABORER GROUP 3- BLASTER; MUCKER; POWDER PERSON; TOP LANDER; WRENCHER (MECHANICAL JOINTS & UTILITY PIPELINE); YARNER; HAZARDOUS WASTE (LEVEL A); CONCRETE SPECIALIST; CONCRETE CREW IN TUNNELS (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); CURB SETTER & CUTTER; GRADE CHECKER; UTILITY PIPELINE TAPPER; WATERLINE; AND CAULKER (CUYAHOGA, GEAUGA & LAKE COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING....		
	\$ 37.68	14.45
LABORER GROUP 3- BLASTER; MUCKER; POWDER PERSON; TOP LANDER; WRENCHER (MECHANICAL JOINTS & UTILITY PIPELINE); YARNER; HAZARDOUS WASTE (LEVEL A); CONCRETE SPECIALIST; CONCRETE CREW IN TUNNELS (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); CURB SETTER & CUTTER; GRADE CHECKER; UTILITY PIPELINE TAPPER; WATERLINE; AND CAULKER (ASHTABULA, ERIE, HURON, LORAIN, LUCAS, MAHONING, MEDINA, OTTAWA, PORTAGE, SANDUSKY, STARK, SUMMIT, TRUMBULL & WOOD COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....		
	\$ 36.45	14.45
LABORER GROUP 4- MINER (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); & GUNITE NOZZLE PERSON (ASHTABULA, ERIE, HURON, LORAIN, LUCAS, MAHONING, MEDINA, OTTAWA, PORTAGE, SANDUSKY, STARK, SUMMIT, TRUMBULL & WOOD COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....		
	\$ 36.90	14.45
LABORER GROUP 4- MINER (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); & GUNITE NOZZLE PERSON (CUYAHOGA, GEAUGA & LAKE COUNTIES) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....		
	\$ 38.13	14.45
LABORER GROUP 4- MINER (WITH AIR-PRESSURIZED - \$1.00 PREMIUM); & GUNITE NOZZLE PERSON (REMAINING COUNTIES OF OHIO) TUNNEL LABORER WITH AIR-PRESSURIZED ADD \$1.00 TO BASE RATE SIGNAL PERSON WILL RECEIVE THE RATE EQUAL TO THE RATE PAID THE LABORER CLASSIFICATION FOR WHICH HE OR SHE IS SIGNALING.....		
	\$ 36.47	14.45
LABORER: SEWAGE PLANTS, WASTE PLANTS, WATER TREATMENT FACILITIES, PUMPING STATIONS, & ETHANOL PLANTS CONSTRUCTION (CUYAHOGA AND GEAUGA COUNTIES ONLY).....		
	\$ 38.56	14.45

PAIN0006-002 05/01/2023

Rates

Fringes

PAINTER COMMERCIAL NEW WORK; REMODELING; & RENOVATIONS: GROUP 1- BRUSH; & ROLLER (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE)).....	\$ 30.75	18.95
PAINTER COMMERCIAL NEW WORK; REMODELING; & RENOVATIONS: GROUP 2- SANDBLASTING & BUFFING (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE)).....	\$ 31.15	18.95
PAINTER COMMERCIAL NEW WORK; REMODELING; & RENOVATIONS: GROUP 3- SPRAY PAINTING; CLOSED STEEL ABOVE 55 FEET; BRIDGES & OPEN STRUCTURAL STEEL;		

TANKS - WATER TOWERS; BRIDGE PAINTERS; BRIDGE RIGGERS; CONTAINMENT BUILDERS (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE)).....	\$ 31.45	18.95
PAINTER COMMERCIAL NEW WORK; REMODELING; & RENOVATIONS: GROUP 4- BRIDGE BLASTER (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE))	\$ 37.01	18.95
PAINTER COMMERCIAL REPAINT GROUP 1- BRUSH; & ROLLER (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE)).....	\$ 29.25	18.95
PAINTER COMMERCIAL REPAINT GROUP 2- SANDBLASTING & BUFFING (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN, PORTAGE (N. OF THE EAST-WEST TURNPIKE) & SUMMIT (N. OF THE EAST-WEST TURNPIKE)).....	\$ 29.65	18.95
PAINTER COMMERCIAL REPAINT GROUP 3- SPRAY PAINTING..	\$ 29.95	18.95

PAIN0007-002 07/01/2025

	Rates	Fringes
PAINTER NEW COMMERCIAL WORK GROUP 1- BRUSH; SPRAY & SANDBLASTING POT TENDER. REPAINT IS 90% OF GROUP RATE.....	\$ 33.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 2- REFINERIES & REFINERY TANKS; SURFACES 30 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 3- SWING STAGE & CHAIR (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 4- LEAD ABATEMENT (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 5- ALL METHODS OF SPRAY (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 6- SOLVENT-BASED CATALYZED EPOXY MATERIALS OF 2 OR MORE COMPONENT MATERIALS, TO INCLUDE SOLVENT-BASED CONVERSION VARNISH (EXCLUDING WATER BASED) (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 7- SPRAY SOLVENT BASED MATERIAL; SAND & ABRASIVE BLASTING (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 8- TOWERS; TANKS; BRIDGES; STACKS OVER 30 FEET (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88
PAINTER: NEW COMMERCIAL WORK: GROUP 9- EPOXY SPRAY (EXCLUDING WATER BASED) (FULTON, HENRY, LUCAS, OTTAWA (EXCLUDING ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOVA) & WOOD) REPAINT IS 90% OF GROUP RATE.....	\$ 34.66	23.88

PAIN0012-008 05/01/2019

	Rates	Fringes
PAINTER: GROUP 1- BRIDGE EQUIPMENT TENDER; BRIDGE/CONTAINMENT BUILDER (BUTLER COUNTY).....	\$ 21.95	10.20
PAINTER: GROUP 2- BRUSH & ROLLER (BUTLER COUNTY)....	\$ 25.30	10.20
PAINTER: GROUP 3- SPRAY (BUTLER COUNTY).....	\$ 25.80	10.20
PAINTER: GROUP 4- SANDBLASTING; & WATERBLASTING (BUTLER COUNTY).....	\$ 26.05	10.20
PAINTER: GROUP 5- ELEVATED TANKS; STEEPLEJACK WORK; BRIDGE; & LEAD ABATEMENT (BUTLER COUNTY).....	\$ 26.30	10.20

PAIN0012-010 05/01/2019

	Rates	Fringes
PAINTER HEAVY & HIGHWAY BRIDGES- GUARDRAILS-LIGHTPOLES- STRIPING BRIDGE EQUIPMENT TENDER AND CONTAINMENT BUILDER (BROWN, CLERMONT, HAMILTON & WARREN).....	\$ 21.95	10.20
PAINTER HEAVY & HIGHWAY BRIDGES- GUARDRAILS-LIGHTPOLES- STRIPING BRIDGES WHEN HIGHEST POINT OF CLEARANCE IS 60 FEET OR MORE; & LEAD ABATEMENT PROJECTS (BROWN, CLERMONT, HAMILTON & WARREN).....	\$ 26.30	10.20
PAINTER HEAVY & HIGHWAY BRIDGES- GUARDRAILS-LIGHTPOLES- STRIPING BRUSH & ROLLER (BROWN, CLERMONT, HAMILTON & WARREN).....	\$ 25.30	10.20
PAINTER HEAVY & HIGHWAY BRIDGES- GUARDRAILS-LIGHTPOLES- STRIPING SANDBLASTING & HOPPER TENDER; WATER BLASTING (BROWN, CLERMONT, HAMILTON & WARREN).....	\$ 26.05	10.20
PAINTER HEAVY & HIGHWAY BRIDGES- GUARDRAILS-LIGHTPOLES- STRIPING SPRAY (BROWN, CLERMONT, HAMILTON & WARREN).....	\$ 25.80	10.20

PAIN0093-001 12/01/2024

	Rates	Fringes
PAINTER: BRIDGES; LOCKS; DAMS; TENSION TOWERS; & ENERGIZED SUBSTATIONS (ATHENS, GUERNSEY, HOCKING, MONROE, MORGAN, NOBLE AND WASHINGTON COUNTIES)....	\$ 36.44	24.46
PAINTER: POWER GENERATING FACILITIES (ATHENS, GUERNSEY, HOCKING, MONROE, MORGAN, NOBLE AND WASHINGTON COUNTIES).....	\$ 33.29	24.46

PAIN0249-002 05/01/2025

	Rates	Fringes
PAINTER: GROUP 1: BRUSH & ROLLER (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 29.15	13.97
PAINTER: GROUP 2: SWING, SCAFFOLD BRIDGES; STRUCTURAL STEEL; OPEN ACID TANK; HIGH TENSION ELECTRICAL EQUIPMENT; & HOT PIPES (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 33.09	13.97
PAINTER: GROUP 3: SPRAY; SANDBLAST; STEAMCLEAN; LEAD ABATEMENT (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 29.90	13.97
PAINTER: GROUP 4: STEEPLEJACK WORK (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 30.10	13.97
PAINTER: GROUP 5: COAL TAR (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 30.65	13.97
PAINTER: GROUP 6: BRIDGE EQUIPMENT TENDER & OR CONTAINMENT BUILDER (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 37.86	13.97
PAINTER: GROUP 7: TANKS, STACKS & TOWERS (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE)..	\$ 33.86	13.97
PAINTER: GROUP 8: BRIDGE BLASTER, RIGGER (CLARK, DARKE, GREENE, MIAMI, MONTGOMERY & PREBLE)..	\$ 40.86	13.97

PAIN0356-002 09/01/2009

	Rates	Fringes
PAINTER: BRIDGE EQUIPMENT TENDERS AND CONTAINMENT BUILDERS (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 27.93	7.25
PAINTER: BRIDGES; BLASTERS; AND RIGGERS (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 34.60	7.25
PAINTER: BRUSH AND ROLLER (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 20.93	7.25
PAINTER: SANDBLASTING; STEAM CLEANING; WATERBLASTING; AND HAZARDOUS WORK (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 25.82	7.25

PAINTER: SPRAY (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 21.40	7.25
PAINTER: STRUCTURAL STEEL AND SWING STAGE (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 25.42	7.25
PAINTER: TANKS; STACKS; AND TOWERS (KNOX, LICKING, MUSKINGUM, AND PERRY).....	\$ 28.63	7.25

PAIN0438-002 12/01/2023

	Rates	Fringes
PAINTER: BRIDGES, LOCKS, DAMS, TENSION TOWERS & ENERGIZED SUBSTATIONS (BELMONT, HARRISON AND JEFFERSON COUNTIES).....	\$ 36.09	19.49
PAINTER: POWER GENERATING FACILITIES (BELMONT, HARRISON AND JEFFERSON COUNTIES).....	\$ 32.94	19.49

PAIN0476-001 06/01/2025

	Rates	Fringes
PAINTER: GROUP 1- PAINTERS, BRUSH & ROLLER (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 30.64	18.36
PAINTER: GROUP 2- BRIDGES (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 40.27	18.36
PAINTER: GROUP 3- STRUCTURAL STEEL (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 40.27	18.36
PAINTER: GROUP 4- SPRAY, EXCEPT BAR JOIST/DECK (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 31.14	18.36
PAINTER: GROUP 5- EPOXY/MASTIC; SPRAY- BAR JOIST/DECK; WORKING ABOVE 50 FEET; AND SWINGSTAGES (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 31.29	18.36
PAINTER: GROUP 6- TANKS; SANDBLASTING (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 35.27	18.36
PAINTER: GROUP 7- TOWERS; STACKS (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....	\$ 32.64	18.36

PAIN0555-002 01/01/2025

	Rates	Fringes
PAINTER: GROUP 1- CONTAINMENT BUILDER (ADAMS, HIGHLAND, JACKSON, PIKE & SCIOTO).....	\$ 33.32	21.54
PAINTER: GROUP 2- BRUSH; ROLLER; POWER TOOLS, UNDER 40 FEET (ADAMS, HIGHLAND, JACKSON, PIKE & SCIOTO).....	\$ 35.02	21.54
PAINTER: GROUP 3- SAND BLASTING; SPRAY; STEAM CLEANING; PRESSURE WASHING; EPOXY & TWO COMPONENT MATERIALS; LEAD ABATEMENT; HAZARDOUS WASTE; TOXIC MATERIALS; BULK & STORAGE TANKS OF 25,000 GALLON CAPACITY OR MORE; ELEVATED TANKS (ADAMS, HIGHLAND, JACKSON, PIKE & SCIOTO).....	\$ 36.72	21.54
PAINTER: GROUP 4- STACKS; BRIDGES (ADAMS, HIGHLAND, JACKSON, PIKE & SCIOTO).....	\$ 40.03	21.54

PAIN0639-001 05/01/2011

	Rates	Fringes
SIGN PAINTER & ERECTOR FOOTNOTES: A. 7 PAID HOLIDAYS: NEW YEAR'S DAY; MEMORIAL DAY; JULY 4TH; LABOR DAY; THANKSGIVING DAY; CHRISTMAS DAY & 1 FLOATING DAY B. VACATION PAY: AFTER 1 YEAR'S SERVICE - 5 DAYS' PAID VACATION; AFTER 2, BUT LESS THAN 10 YEARS' SERVICE - 10 DAYS' PAID VACATION; AFTER 10, BUT LESS THAN 20 YEARS' SERVICE - 15 DAYS' PAID VACATION; AFTER 20 YEARS' SERVICE - 20 DAYS' PAID VACATION C. FUNERAL LEAVE UP TO 3 DAYS MAXIMUM PAID LEAVE FOR DEATH OF MOTHER, FATHER, BROTHER, SISTER, SPOUSE, CHILD, MOTHER-IN-LAW, FATHER-IN-LAW, GRANDPARENT AND INLAW PROVIDED EMPLOYEE ATTENDS FUNERAL.....	\$ 20.61	3.50

PAIN0788-002 06/01/2024

	Rates	Fringes
PAINTER: BRUSH & ROLLER (ASHLAND, CRAWFORD, ERIE, HANCOCK, HURON, MARION, MORROW, OTTAWA (ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOA), RICHLAND, SANDUSKY, SENECA & WYANDOT) WINTER REPAINT: BETWEEN DECEMBER 1 TO MARCH 31 - 90%JR \$.50 PER HOUR SHALL BE ADDED TO THE RATE OF PAY FOR THE CLASSIFICATION OF WORK: WHILE WORKING SWINGSTAGE, BOATSWAIN CHAIR, NEEDLE BEAM AND HORIZONTAL CABLE. WHILE OPERATING SPRAYGUNS,		

SANDBLASTING, COBBLASTING AND HIGH PRESSURE WATERBLASTING (4000PSI). \$1.00 PER HOUR SHALL BE ADDED TO THE RATE OF PAY FOR THE CLASSIFICATION OF WORK: FOR THE APPLICATION OF CATALYZED EPOXY, INCLUDING LATEX EPOXY THAT IS DEEMED HAZARDOUS, LEAD ABATEMENT, OR FOR WORK OR MATERIAL WHERE SPECIAL PRECAUTIONS BEYOND NORMAL WORK DUTIES MUST BE TAKEN. FOR WORKING ON STACKS, TANKS, AND TOWERS OVER 40 FEET IN HEIGHT.....\$ 29.13 17.52

PAINTER: STRUCTURAL STEEL (ASHLAND, CRAWFORD, ERIE, HANCOCK, HURON, MARION, MORROW, OTTAWA (ALLEN, BAY, BONO, CATAWBA ISLAND, CLAY CENTER, CURTICE, DANBURY, EAGLE BEACH, ELLISTON, ELMORE, ERIE, FISHBACK, GEM BEACH & GENOA), RICHLAND, SANDUSKY, SENECA & WYANDOT) WINTER REPAINT: BETWEEN DECEMBER 1 TO MARCH 31 - 90%JR \$.50 PER HOUR SHALL BE ADDED TO THE RATE OF PAY FOR THE CLASSIFICATION OF WORK: WHILE WORKING SWINGSTAGE, BOATSWAIN CHAIR, NEEDLE BEAM AND HORIZONTAL CABLE. WHILE OPERATING SPRAYGUNS, SANDBLASTING, COBBLASTING AND HIGH PRESSURE WATERBLASTING (4000PSI). \$1.00 PER HOUR SHALL BE ADDED TO THE RATE OF PAY FOR THE CLASSIFICATION OF WORK: FOR THE APPLICATION OF CATALYZED EPOXY, INCLUDING LATEX EPOXY THAT IS DEEMED HAZARDOUS, LEAD ABATEMENT, OR FOR WORK OR MATERIAL WHERE SPECIAL PRECAUTIONS BEYOND NORMAL WORK DUTIES MUST BE TAKEN. FOR WORKING ON STACKS, TANKS, AND TOWERS OVER 40 FEET IN HEIGHT.....\$ 30.73 17.52

PAIN0813-005 12/01/2008

	Rates	Fringes
PAINTER: BASE RATE (GALLIA, LAWRENCE, MEIGS & VINTON).....	\$ 24.83	10.00
PAINTER: BRIDGES, LOCKS, DAMS & TENSION TOWERS (GALLIA, LAWRENCE, MEIGS & VINTON).....	\$ 27.83	10.00

PAIN0841-001 07/01/2025

	Rates	Fringes
PAINTERS: GROUP 1- BRUSH, ROLLER & PAPERHANGER (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 31.93	18.15
PAINTERS: GROUP 2- EPOXY APPLICATION (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 32.58	18.15
PAINTERS: GROUP 3- SWING SCAFFOLD, BOSUM CHAIR, & WINDOW JACK (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 32.68	18.15
PAINTERS: GROUP 4- SPRAY GUN OPERATOR OF ANY & ALL COATINGS (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 32.78	18.15
PAINTERS: GROUP 5- SANDBLAST, PAINTING OF STANDPIPES, ETC. FROM SCAFFOLDS, BRIDGE WORK AND/OR OPEN STRUCTURAL STEEL, STANDPIPES AND/OR WATER TOWERS (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 33.18	18.15
PAINTERS: GROUP 6- PUBLIC & COMMERCE TRANSPORTATION, STEEL OR GALVANIZED, BRIDGES, TUNNELS & RELATED SUPPORT ITEMS (CONCRETE) (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 38.60	18.15
PAINTERS: GROUP 7- SYNTHETIC EXTERIOR, DRYWALL FINISHER AND/OR TAPER, DRYWALL FINISHER AND FOLLOW-UP MAN USING AUTOMATIC TOOLS (MEDINA, PORTAGE (SOUTH OF AND INCLUDING OHIO TURNPIKE), AND SUMMIT (SOUTH OF AND INCLUDING OHIO TURNPIKE) COUNTIES).....	\$ 33.18	18.15

PAIN0841-002 07/01/2025

	Rates	Fringes
PAINTER: BRIDGES; TOWERS, POLES & STACKS; SANDBLASTING STEEL; STRUCTURAL STEEL & METALIZING (CARROLL, COSHOCTON, HOLMES, STARK, TUSCARAWAS &		

WAYNE).....	\$ 33.18	18.15
PAINTER: BRUSH & ROLLER (CARROLL, COSHOCTON, HOLMES, STARK, TUSCARAWAS & WAYNE).....		
	\$ 31.93	18.15
PAINTER: SPRAY; TANK INTERIOR & EXTERIOR (CARROLL, COSHOCTON, HOLMES, STARK, TUSCARAWAS & WAYNE).....		
	\$ 32.78	18.15

PAIN1020-002 07/01/2025

Rates

Fringes

PAINTER: BRUSH & ROLLER (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES) ALL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 27.59	18.54
PAINTER: DRYWALL FINISHING & TAPING (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES): LL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM			
	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 28.34	18.54
PAINTER: LEAD ABATEMENT (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES) ALL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM			
	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 29.34	18.54
PAINTER: SPRAY, SANDBLASTING PRESSURE CLEANING, & REFINERY (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES) ALL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM			
	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 28.34	18.54
PAINTER: SWING STAGE, CHAIR, SPIDERS, & CHERRY PICKERS (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES) ALL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM			
	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 27.84	18.54
PAINTER: WALLCOVERINGS (ALLEN, AUGLAIZE, CHAMPAIGN, DEFIANCE, HARDIN, LOGAN, MERCER, PAULDING, PUTNAM, SHELBY, VAN WERT, AND WILLIAMS COUNTIES) ALL SURFACES 40 FT. OR OVER WHERE MATERIAL IS APPLIED TO OR LABOR PERFORMED ON, ABOVE GROUND LEVEL (EXTERIOR), FLOOR LEVEL (INTERIOR) - \$1.00 PREMIUM			
	APPLYING COAL TAR PRODUCTS - \$1.00 PREMIUM.....	\$ 28.34	18.54

PAIN1275-002 05/01/2025

Rates

Fringes

PAINTER: BRIDGES (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 37.26	15.16
PAINTER: BRUSH; ROLLER (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 30.20	15.16
PAINTER: SANDBLASTING; STEAMCLEANING; WATERBLASTING (3500 PSI OR OVER)& HAZARDOUS WORK (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 32.35	15.16
PAINTER: SPRAY (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 32.15	15.16
PAINTER: STACKS; TANKS; & TOWERS (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 34.46	15.16
PAINTER: STRUCTURAL STEEL & SWING STAGE (DELAWARE, FAIRFIELD, FAYETTE, FRANKLIN, MADISON, PICKAWAY, ROSS & UNION).....	\$ 30.50	15.16

PLAS0109-001 06/01/2025

Rates

Fringes

PLASTERER (MEDINA, PORTAGE, STARK, AND SUMMIT

COUNTIES).....\$ 33.00	23.83

PLAS0109-003 06/01/2025	
Rates	Fringes
PLASTERER (CARROLL, HOLMES, TUSCARAWAS, AND WAYNE COUNTIES).....\$ 33.00	23.83

PLAS0132-002 07/01/2025	
Rates	Fringes
PLASTERER (BROWN, BUTLER, CLERMONT, HAMILTON, HIGHLAND, WARREN COUNTIES).....\$ 31.35	17.65

PLAS0404-002 05/01/2018	
Rates	Fringes
PLASTERER (ASHTABULA, CUYAHOGA, GEAUGA, AND LAKE COUNTIES).....\$ 29.63	17.11

PLAS0404-003 05/01/2018	
Rates	Fringes
PLASTERER (LORAIN COUNTY).....\$ 28.86	17.11

PLAS0526-022 05/01/2018	
Rates	Fringes
PLASTERER (COLUMBIANA, MAHONING, AND TRUMBULL COUNTIES).....\$ 28.86	17.11

PLAS0526-023 05/01/2018	
Rates	Fringes
PLASTERER (BELMONT, HARRISON, AND JEFFERSON COUNTIES).....\$ 28.21	17.11

PLAS0886-001 07/01/2025	
Rates	Fringes
PLASTERER (FULTON, HANCOCK, HENRY, LUCAS, PUTNAM, AND WOOD COUNTIES).....\$ 36.65	25.60

PLAS0886-003 07/01/2025	
Rates	Fringes
PLASTERER (DEFIANCE, ERIE, HURON, OTTAWA, PAULDING, SANDUSKY, AND SENECA).....\$ 36.65	25.60

PLAS0886-004 07/01/2025	
Rates	Fringes
PLASTERER (ALLEN, AUGLAIZE, HARDIN, LOGAN, MERCER, AND VAN WERT).....\$ 35.29	23.07

PLUM0042-002 07/01/2025	
Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (ASHLAND, CRAWFORD, ERIE, HURON, KNOX, LORAIN, MORROW, RICHLAND & WYANDOT).....\$ 43.02	26.45

PLUM0050-002 06/30/2025	
Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (DEFIANCE, FULTON, HANCOCK, HENRY, LUCAS, OTTAWA, PAULDING, PUTNAM, SANDUSKY, SENECA, WILLIAMS & WOOD).....\$ 51.00	32.56

PLUM0055-003 05/05/2025	
Rates	Fringes
PLUMBER (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, MEDINA (N. OF RTE. #18 & SMITH ROAD) & SUMMIT (N. OF RTE. #303, INCLUDING THE CORPORATE LIMITS OF THE CITY OF HUDSON)).....\$ 44.86	30.03

PLUM0083-001 07/01/2023	
Rates	Fringes
PLUMBER AND STEAMFITTER (BELMONT & MONROE (NORTH OF RTE. #78)).....\$ 35.94	37.35

PLUM0094-002 05/01/2025		
	Rates	Fringes
PLUMBER/PIPEFITTER (CARROLL (NORTHERN HALF), STARK, AND WAYNE COUNTIES).....	\$ 47.48	27.14

PLUM0120-002 05/01/2025		
	Rates	Fringes
PIPEFITTER (ASHTABULA, CUYAHOGA, GEAUGA, LAKE, LORAIN (THE C.E.I. POWER HOUSE IN AVON LAKE), MEDINA (N. OF RTE. #18) & SUMMIT (N. OF #303)).....	\$ 49.17	28.55

PLUM0162-002 06/01/2024		
	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (CHAMPAIGN, CLARK, CLINTON, DARKE, FAYETTE, GREENE, MIAMI, MONTGOMERY & PREBLE).....	\$ 43.05	27.18

PLUM0168-002 06/01/2025		
	Rates	Fringes
PLUMBER/PIPEFITTER (MEIGS, MONROE (SOUTH OF RTE. #78), MORGAN (SOUTH OF RTE. #78) & WASHINGTON).....	\$ 40.92	37.20

PLUM0189-002 06/01/2025		
	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (DELAWARE, FAIRFIELD, FRANKLIN, HOCKING, LICKING, MADISON, MARION, PERRY, PICKAWAY, ROSS & UNION).....	\$ 53.00	27.59

PLUM0219-002 06/01/2025		
	Rates	Fringes
PLUMBER AND STEAMFITTER (MEDINA (RTE. #18 FROM EASTERN EDGE OF MEDINA CO., WEST TO EASTERN CORPORATE LIMITS OF THE CITY OF MEDINA, & ON THE COUNTY ROAD FROM THE WEST CORPORATE LIMITS OF MEDINA RUNNING DUE WEST TO AND THROUGH COMMUNITY OF RISLEY TO THE WESTERN EDGE OF MEDINA COUNTY - ALL TERRITORY SOUTH OF THIS LINE), PORTAGE, AND SUMMIT (S. OF RTE. #303) COUNTIES).....	\$ 46.87	28.39

PLUM0392-002 06/01/2025		
	Rates	Fringes
PLUMBER/PIPEFITTER (BROWN, BUTLER, CLERMONT, HAMILTON & WARREN).....	\$ 43.30	27.40

PLUM0396-001 06/01/2025		
	Rates	Fringes
PLUMBER/PIPEFITTER (COLUMBIANA (EXCLUDING WASHINGTON & YELLOW CREEK TOWNSHIPS & LIVERPOOL TWP. - SECS. 35 & 36 - WEST OF COUNTY ROAD #427), MAHONING AND TRUMBULL COUNTIES).....	\$ 40.55	29.25

PLUM0495-002 06/01/2025		
	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (CARROLL (ROSE, MONROE, UNION, LEE, ORANGE, PERRY & LOUDON TOWNSHIPS), COLUMBIANA (WASHINGTON & YELLOW CREEK TOWNSHIPS & LIVERPOOL TOWNSHIP, SECS. 35 & 36, WEST OF COUNTY RD. #427), COSHOCTON, GUERNSEY, HARRISON, HOLMES, JEFFERSON, MORGAN (SOUTH TO STATE RTE. #78 & FROM MCCONNELSVILLE WEST ON STATE RTE. #37 TO THE PERRY COUNTY LINE), MUSKINGUM, NOBLE, AND TUSCARAWAS COUNTIES).....	\$ 39.32	37.60

PLUM0577-002 06/01/2025		
	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (ADAMS, ATHENS, GALLIA, HIGHLAND, JACKSON, LAWRENCE, PIKE, SCIOTO & VINTON).....	\$ 42.65	28.56

PLUM0776-002 07/01/2025		

	Rates	Fringes
PLUMBER, PIPEFITTER, STEAMFITTER (ALLEN, AUGLAIZE, HARDIN, LOGAN, MERCER, SHELBY AND VAN WERT COUNTIES).....	\$ 42.76	30.81

TEAM0377-003 05/01/2025

	Rates	Fringes
TRUCK DRIVER: GROUP 1- ASPHALT DISTRIBUTOR; BATCH; 4- WHEEL SERVICE; 4-WHEEL DUMP; OIL DISTRIBUTOR & TANDEM (STATEWIDE, EXCEPT CUYAHOGA, GEAUGA & LAKE).....	\$ 34.26	18.85
TRUCK DRIVER: GROUP 2- TRACTOR-TRAILER COMBINATION: FUEL; POLE TRAILER; READY MIX; SEMI-TRACTOR; & ASPHALT OIL SPRAYBAR MAN WHEN OPERATED FROM CAB; 5 AXLES & OVER; BELLY DUMP; END DUMP; ARTICULATED DUMP; HEAVY DUTY EQUIPMENT; LOW BOY; & TRUCK MECHANIC (STATEWIDE, EXCEPT CUYAHOGA, GEAUGA & LAKE).....	\$ 35.26	18.85

TEAM0436-002 05/01/2025

	Rates	Fringes
TRUCK DRIVER: GROUP 1- STRAIGHT & DUMP, STRAIGHT FUEL (CUYAHOGA, GEAUGA & LAKE).....	\$ 34.92	19.30
TRUCK DRIVER: GROUP 2- SEMI FUEL, SEMI TRACTOR, EUCLIDS, DARTS, TANK, ASPHALT SPREADERS, LOW BOYS, CARRY-ALL, TOURNA-ROCKERS, HI-LIFTS, EXTRA LONG TRAILERS, SEMI-POLE TRAILERS, DOUBLE HOOK-UP TRACTOR TRAILERS INCLUDING TEAM TRACK & RAILROAD SIDING, SEMI-TRACTOR & TRI-AXLE TRAILER, TANDEM TRACTOR & TANDEM TRAILER, TAG ALONG TRAILER, EXPANDABLE TRAILER OR TOWING REQUIRING ROAD PERMITS, READY-MIX (AGITATOR OR NON-AGITATOR), BULK CONCRETE DRIVER, DRY BATCH TRUCK, ARTICULATED END DUMP (CUYAHOGA, GEAUGA & LAKE).....	\$ 35.73	19.30

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.65 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than "SU", "UAVG", "?SA?", or "?SC?" denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The "SU" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The "?SA" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were

adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====
END OF GENERAL DECISION"

TO BE INSERTED HERE IN BID SETS

**DAVIS-BACON WAGE DETERMINATION SCHEDULE
EFFECTIVE WITHIN 3 BUSINESS DAYS OF THE SALE DATE
OR
WITHIN 10 BUSINESS DAYS OF THE SALE DATE IF THE OWNER CAN NOT ISSUE
THE REVISED WAGES BETWEEN 3 DAYS AND 10 DAYS OF THE SALE DATE
(must put memo in file to affirm same)**