



To: All Plan Holders of Record

From: Verdantas LLC
For the Owner

Re: Addendum No. 2
Nason Basin to Grove Avenue Storm Sewer Phase 1
City of Willoughby

Date: March 4, 2025

This Addendum forms a part of the contract documents and modifies the original bidding documents dated February 2025 and all previous addenda, if any. Acknowledge receipt of this addendum in the space provided in the bid forms. Failure to do so may subject the bidder to disqualification.

QUESTIONS AND ANSWERS

Q1. Please confirm that the carrier pipe for the tunnel is included in line item 34.

A1. Yes, carrier pipe for the tunnel is included in the line item 3.4 (611) 84" CONDUIT, TYPE B.

Q2. In the base bid, can excess material from the project be taken to the Pelton Landfill site to make fills required to reach the finish grades.

A2. Yes, per General Note on Sheet 03/43 excess material from the project be taken to the Pelton Landfill site to make the fill required to reach the finish grades.

Q3. Once the finish grades are reached at the Pelton Landfill site is the contractor responsible to find their own waste site for additional material from the project?

A3. Yes, once the final grades are reached at the Pelton Landfill site, the contractor is responsible for finding their own waste site for additional material from the project.

Q4. Please confirm the quantity for line item 34.

A4. The quantity for line item 34 has been updated in the bid form.

BID DOCUMENTS

Replace (608) 6 INCH CLASS QC MS CONCRETE WALK, INCLUDING REMOVAL, AS PER PLAN with (608) 6 INCH CONCRETE WALK, INCLUDING REMOVAL, AS PER PLAN in item 2.13 in the Prices to Include.

Addendum No. 1
Date: March 4, 2025
Page 2

BID FORMS

Replace Bid Form, Page BF.9A, with the enclosed Bid Form, Page BF.9B.
Please submit BF.8A, BF.9B and BF.10 A to 13A.

PLANS

Replace plan sheet 12/43 with the enclosed Revised plan sheet 12/43.

TL/LH:mep

Enclosures

H:\2015\150772\SPEC\Addenda\Addendum 02\Addendum 02.Doc

Proposal to City of Willoughby
For Nason Basin to Grove Avenue Storm Sewer Improvements - Phase 1
Base Bid
Project No. 150772

REF. NO.	DESCRIPTION	QTY.	MEASURE UNITS	UNIT PRICE LABOR	UNIT PRICE MATERIAL	TOTAL UNIT PRICE	ITEM TOTAL
23	(605) 4 INCH SHALLOW PIPE UNDERDRAIN WITH GEOTEXTILE FABRIC	825.00	FT	\$	\$	\$	\$
24	(608) 6 INCH CONCRETE WALK, INCLUDING REMOVAL, AS PER PLAN	5,643.00	SF	\$	\$	\$	\$
25	(608) CURB RAMP REPLACEMENT INCLUDING CONCRETE AND NEW TRUNCATED DOME PLATE, AS PER PLAN	4.00	EACH	\$	\$	\$	\$
26	(609) CURB, TYPE 2-A	840.00	FT	\$	\$	\$	\$
27	(609) CURB, TYPE 7	60.00	FT	\$	\$	\$	\$
28	(SPC) 6 INCH DIAMETER & SMALLER SEWER & DRAIN REPLACEMENT, CONTINGENCY	50.00	FT	\$	\$	\$	\$
29	(611) 12" CONDUIT, TYPE B	624.00	FT	\$	\$	\$	\$
30	(611) 12" SANITARY SEWER, AS PER PLAN	194.00	FT	\$	\$	\$	\$
31	(611) 15" CONDUIT, TYPE B	46.00	FT	\$	\$	\$	\$
32	(611) 18" CONDUIT, TYPE B	24.00	FT	\$	\$	\$	\$
33	(611) 60" CONDUIT, TYPE B	110.00	FT	\$	\$	\$	\$
34	(611) 84" CONDUIT, TYPE B	2,100.00	FT	\$	\$	\$	\$
35	(611) CONDUIT, BORED OR JACKED, AS PER PLAN	288.00	FT	\$	\$	\$	\$
36	(611) CONDUIT, MISC.: CONNECTION TO EXISTING PIPE	6.00	EACH	\$	\$	\$	\$
37	(611) CONDUIT, MISC.: BULKHEAD EXISTING SANITARY SEWER	1.00	EACH	\$	\$	\$	\$
38	(611) CATCH BASIN, NO. 3	2.00	EACH	\$	\$	\$	\$
39	(611) CATCH BASIN, NO. 3A	3.00	EACH	\$	\$	\$	\$
40	(611) CATCH BASIN, NO. 2-2B	1.00	EACH	\$	\$	\$	\$
41	(611) 48 INCH SANITARY MANHOLE, AS PER PLAN	1.00	EACH	\$	\$	\$	\$
42	(611) 48" SANITARY DROP MANHOLE, AS PER PLAN	1.00	EACH	\$	\$	\$	\$
43	(611) 48 INCH STORM MANHOLE, AS PER PLAN	2.00	EACH	\$	\$	\$	\$
44	(611) JUNCTION CHAMBER, AS PER PLAN	6.00	EACH	\$	\$	\$	\$

Copyright - Mar 04, 2025 - 10:45am CT Consultants, Inc.
Drawing name- H:\2015\150772\DWG\BASE\Phase 1\150772.dwg Layout- PP-6.bv.hll



NO	REVISION	DATE
1.	ADDENDUM NO. 2.	MAR 4, 2025

CITY OF WILLOUGHBY

NASON BASIN TO GROVE AVENUE
STORM SEWER IMPROVEMENTS
PHASE 1

LAKE COUNTY

WILLOUGHBY, OHIO

ISSUED FOR: BID

ISSUE DATE: 02/07/25

SCALE: AS SHOWN

DESIGNED BY: MPC

DRAWN BY: TJM

CHECKED BY: LCH

12 INCH STORM SEWER & ACCESS ROAD
GRADING PLAN



PROJECT NO.
150772

DISCIPLINE
CIVIL

SHEET NAME
PP-6

SHEET 12 OF 43

NASON BASIN

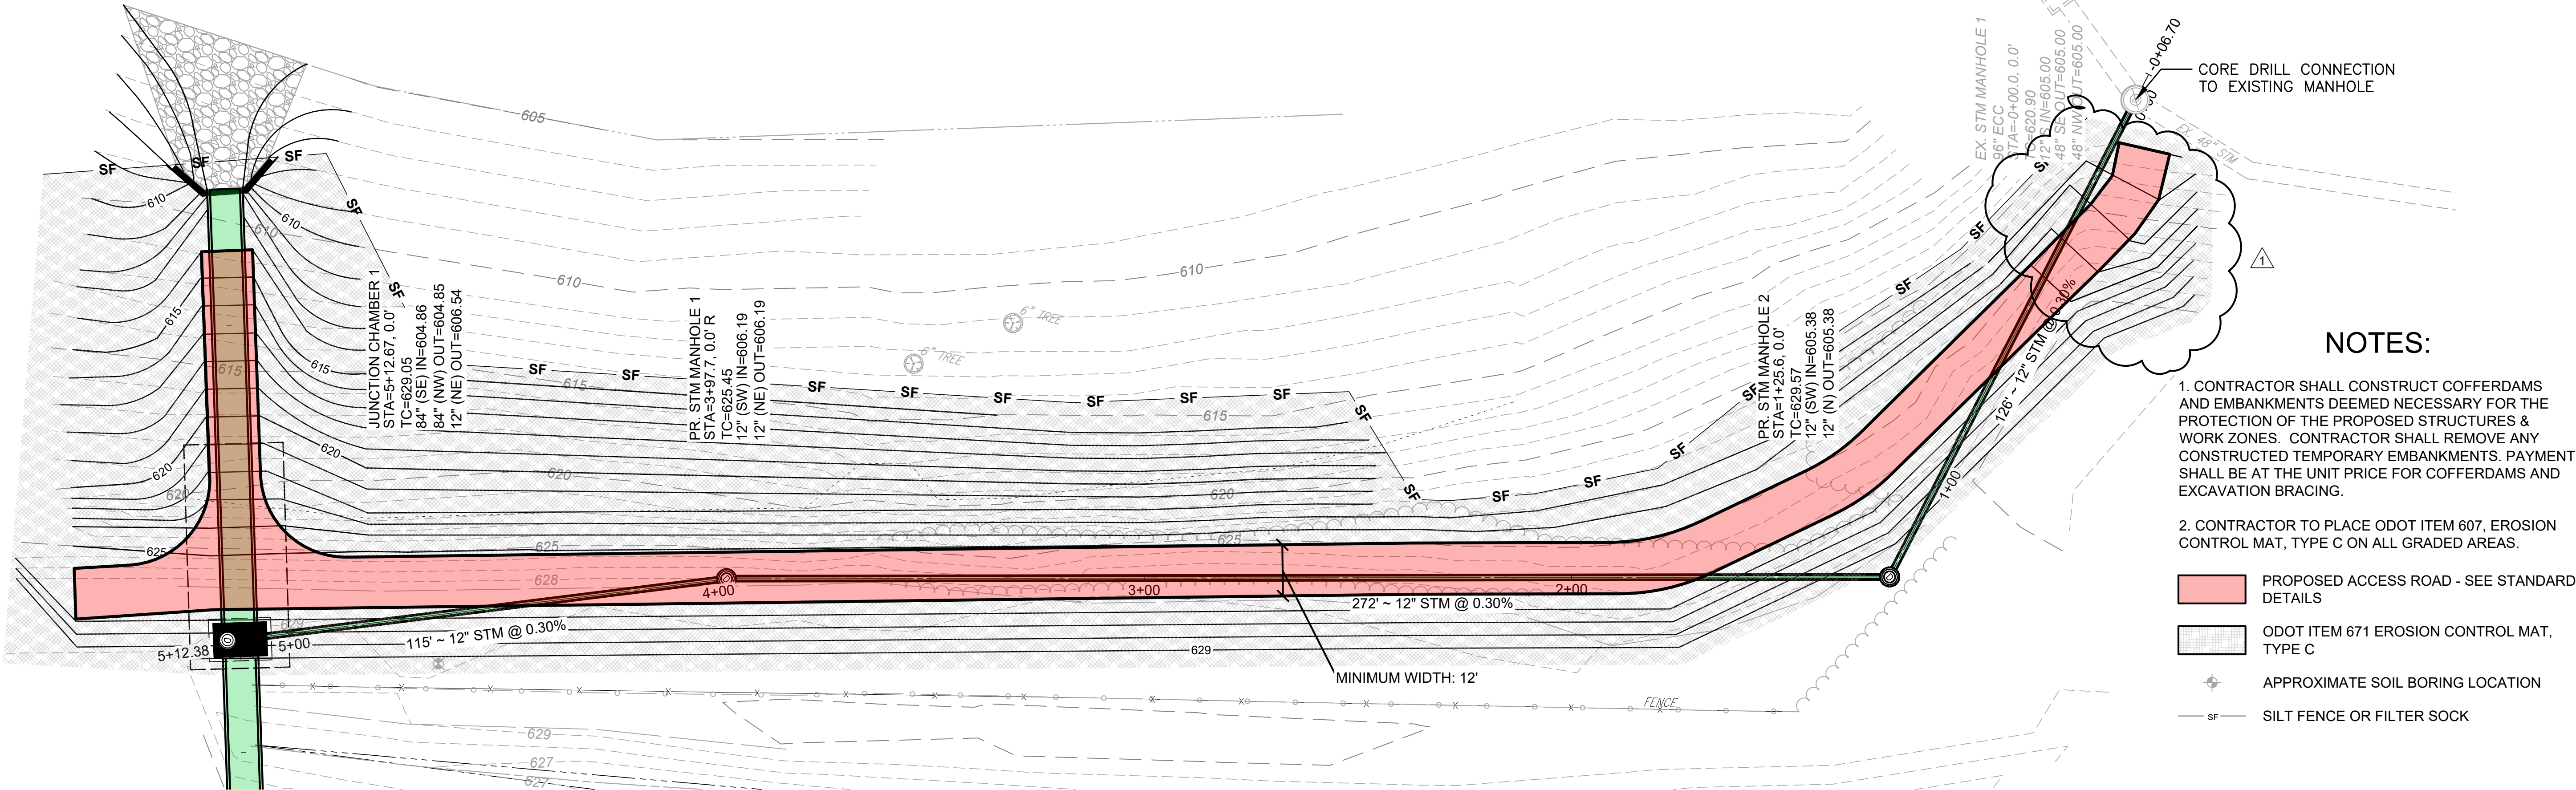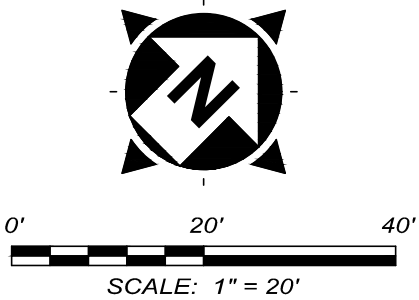

NOTES:

1. CONTRACTOR SHALL CONSTRUCT COFFERDAMS AND EMBANKMENTS DEEMED NECESSARY FOR THE PROTECTION OF THE PROPOSED STRUCTURES & WORK ZONES. CONTRACTOR SHALL REMOVE ANY CONSTRUCTED TEMPORARY EMBANKMENTS. PAYMENT SHALL BE AT THE UNIT PRICE FOR COFFERDAMS AND EXCAVATION BRACING.

2. CONTRACTOR TO PLACE ODOT ITEM 607, EROSION CONTROL MAT, TYPE C ON ALL GRADED AREAS.

- PROPOSED ACCESS ROAD - SEE STANDARD DETAILS
- ODOT ITEM 671 EROSION CONTROL MAT, TYPE C
- APPROXIMATE SOIL BORING LOCATION
- SILT FENCE OR FILTER SOCK

