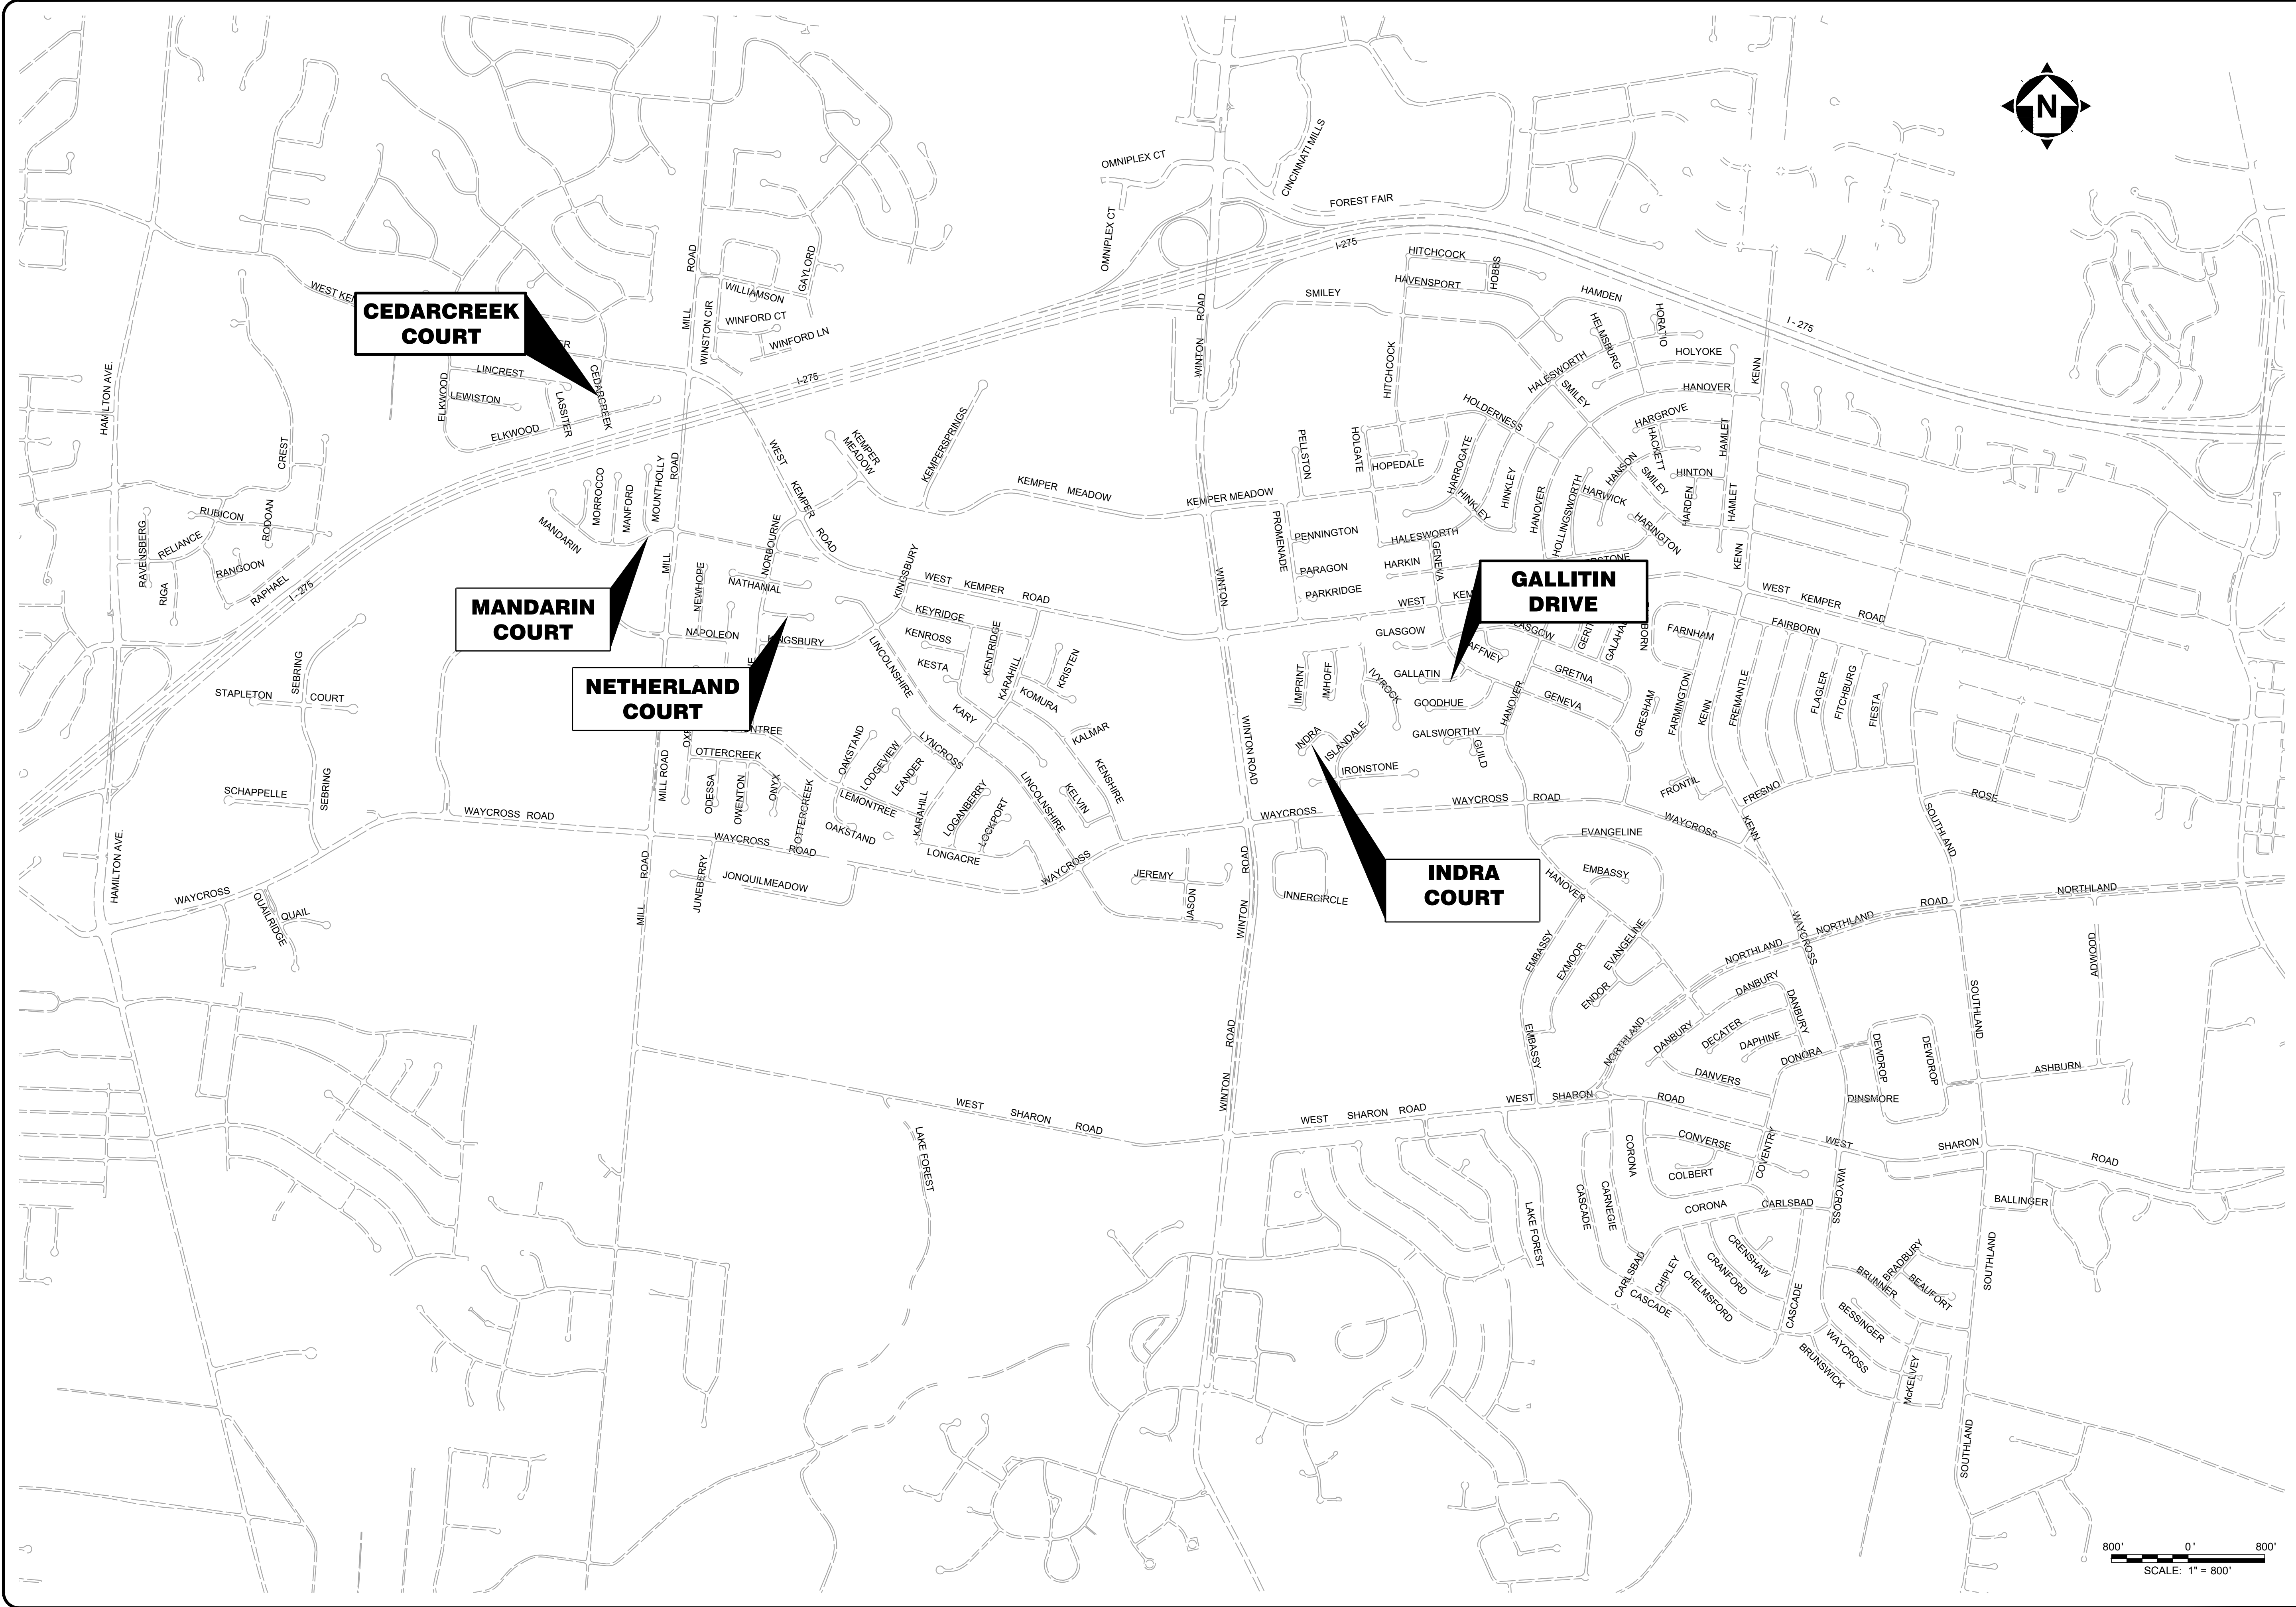





FOREST PARK STREET PROGRAM

2025
FOREST PARK, OHIO

VICINITY MAP

ISSUED FOR:	XX% REVIEW	NO	REVISION	DATE
ISSUE DATE:	03/10/25			
SCALE:	AS SHOWN			
DESIGNED BY:	AJAC			
DRAWN BY:	AJAC			
CHECKED BY:	EMOR			

PROJECT NO. 2500070	
DISCIPLINE CIVIL	
SHEET NAME GEN2	
SHEET 2	OF 8

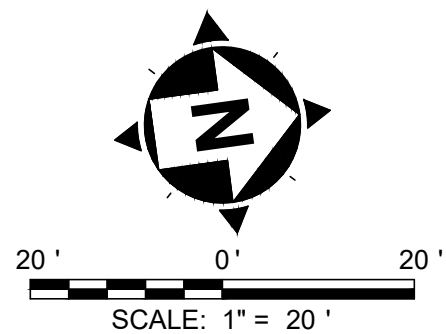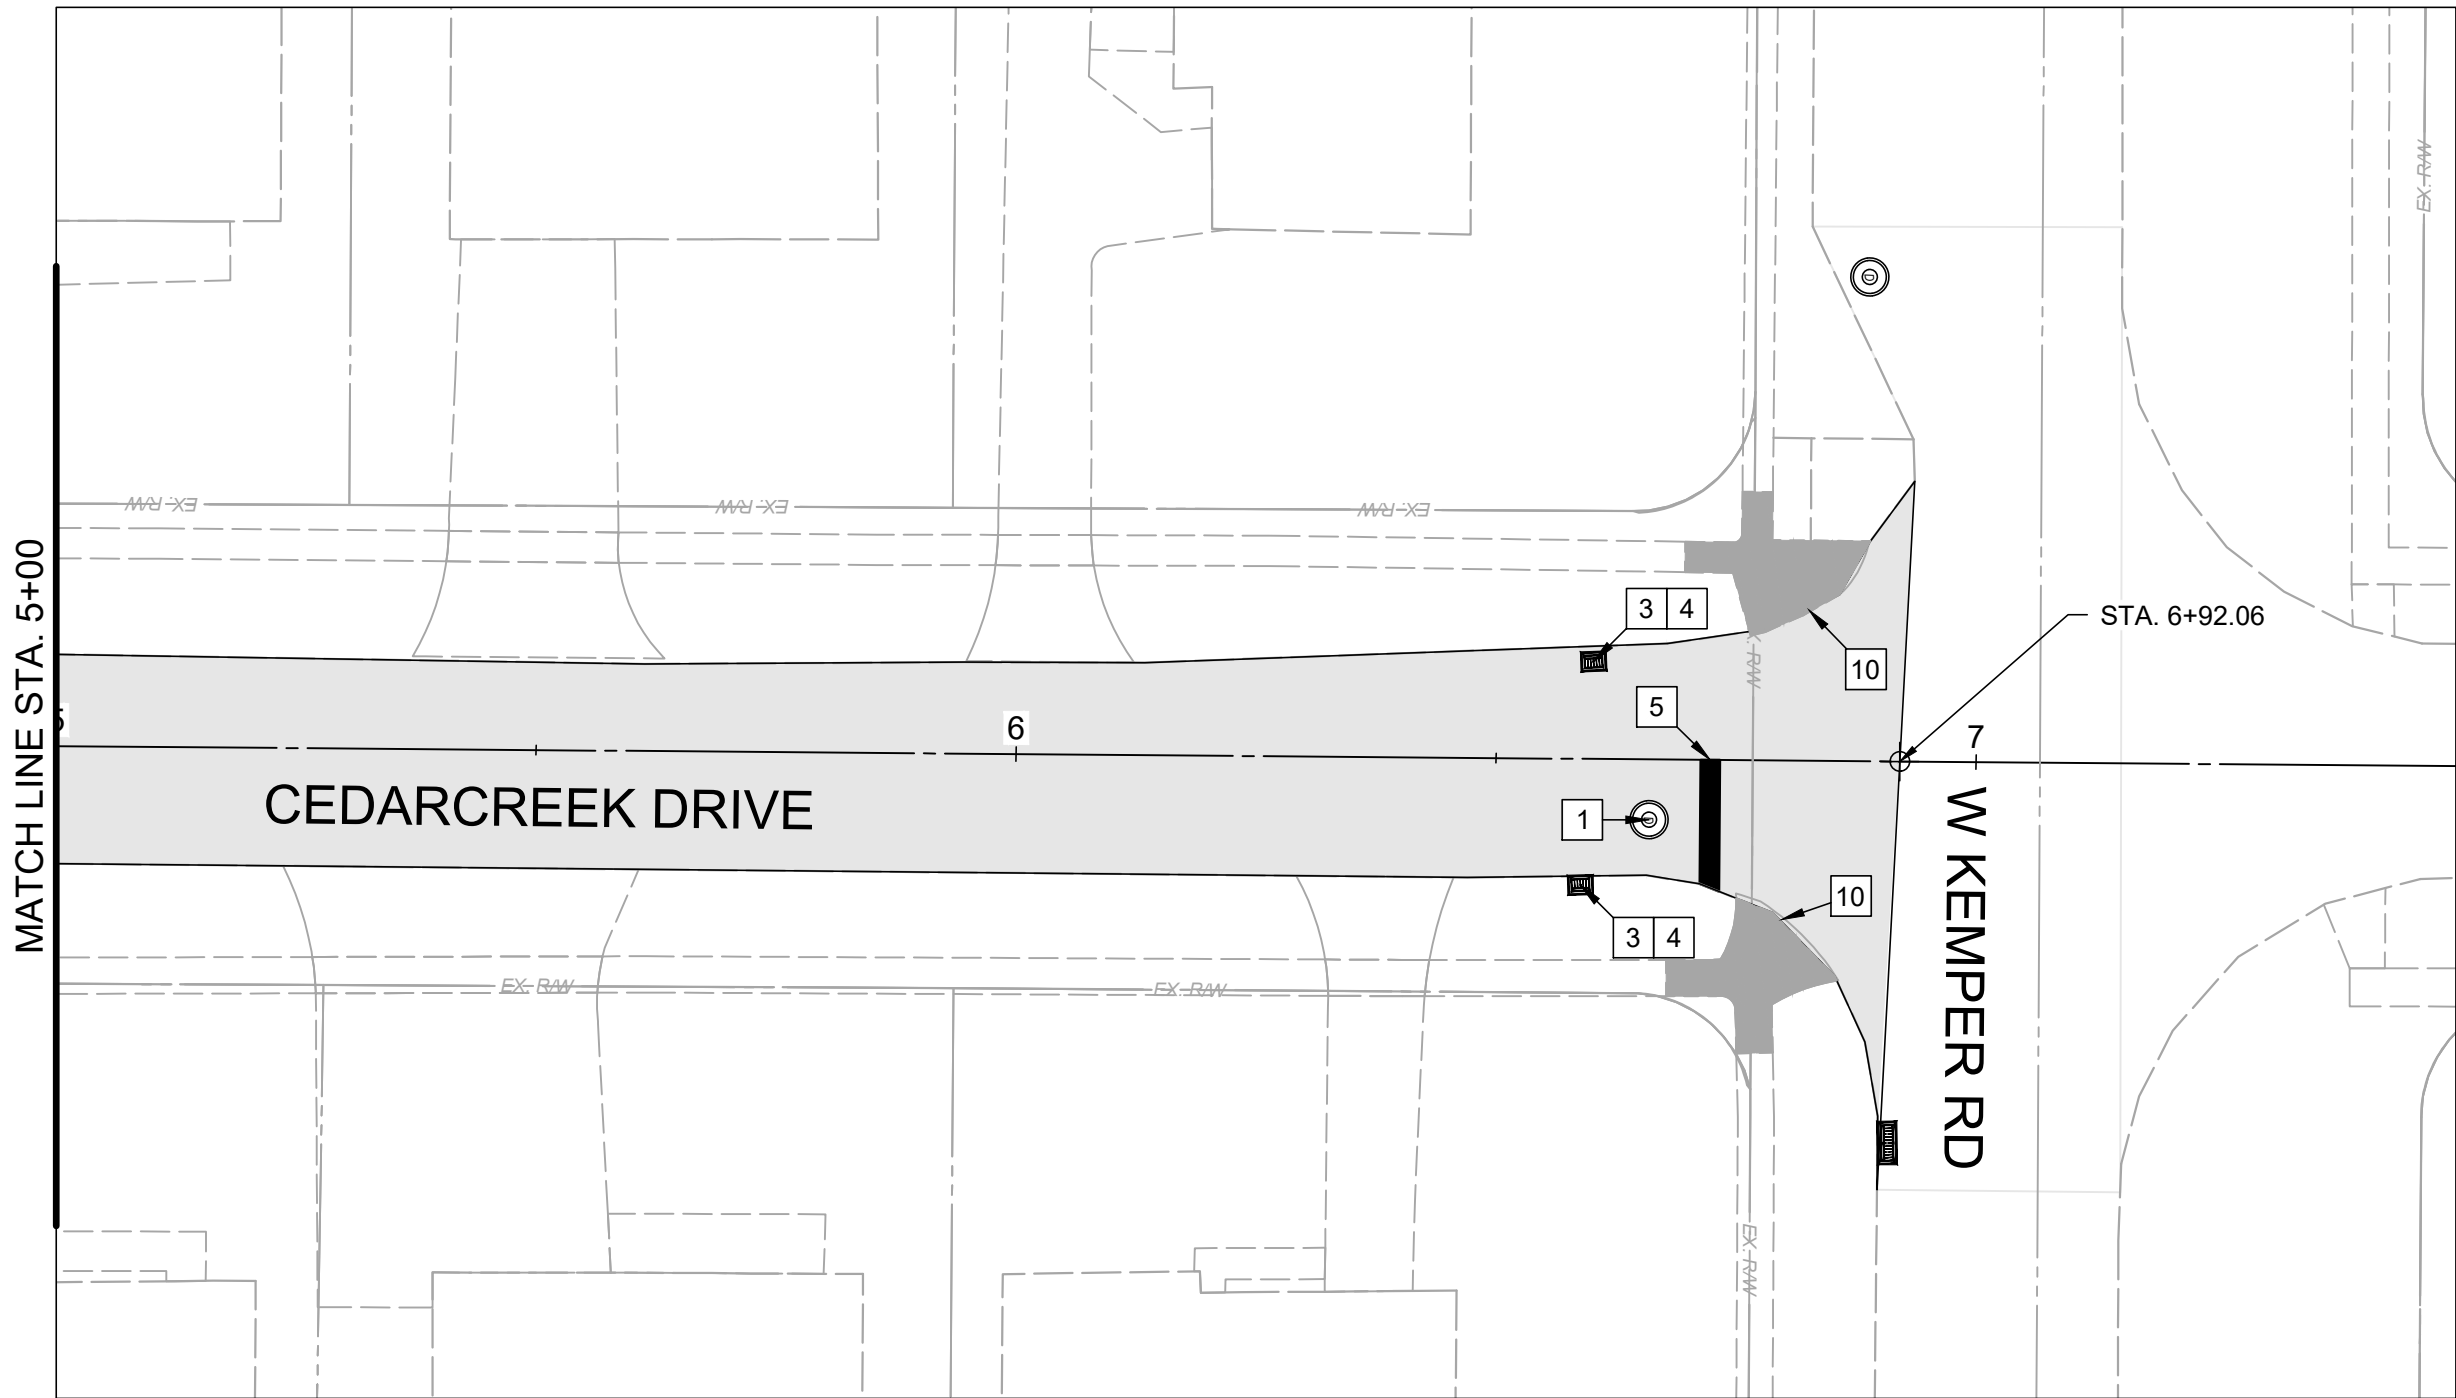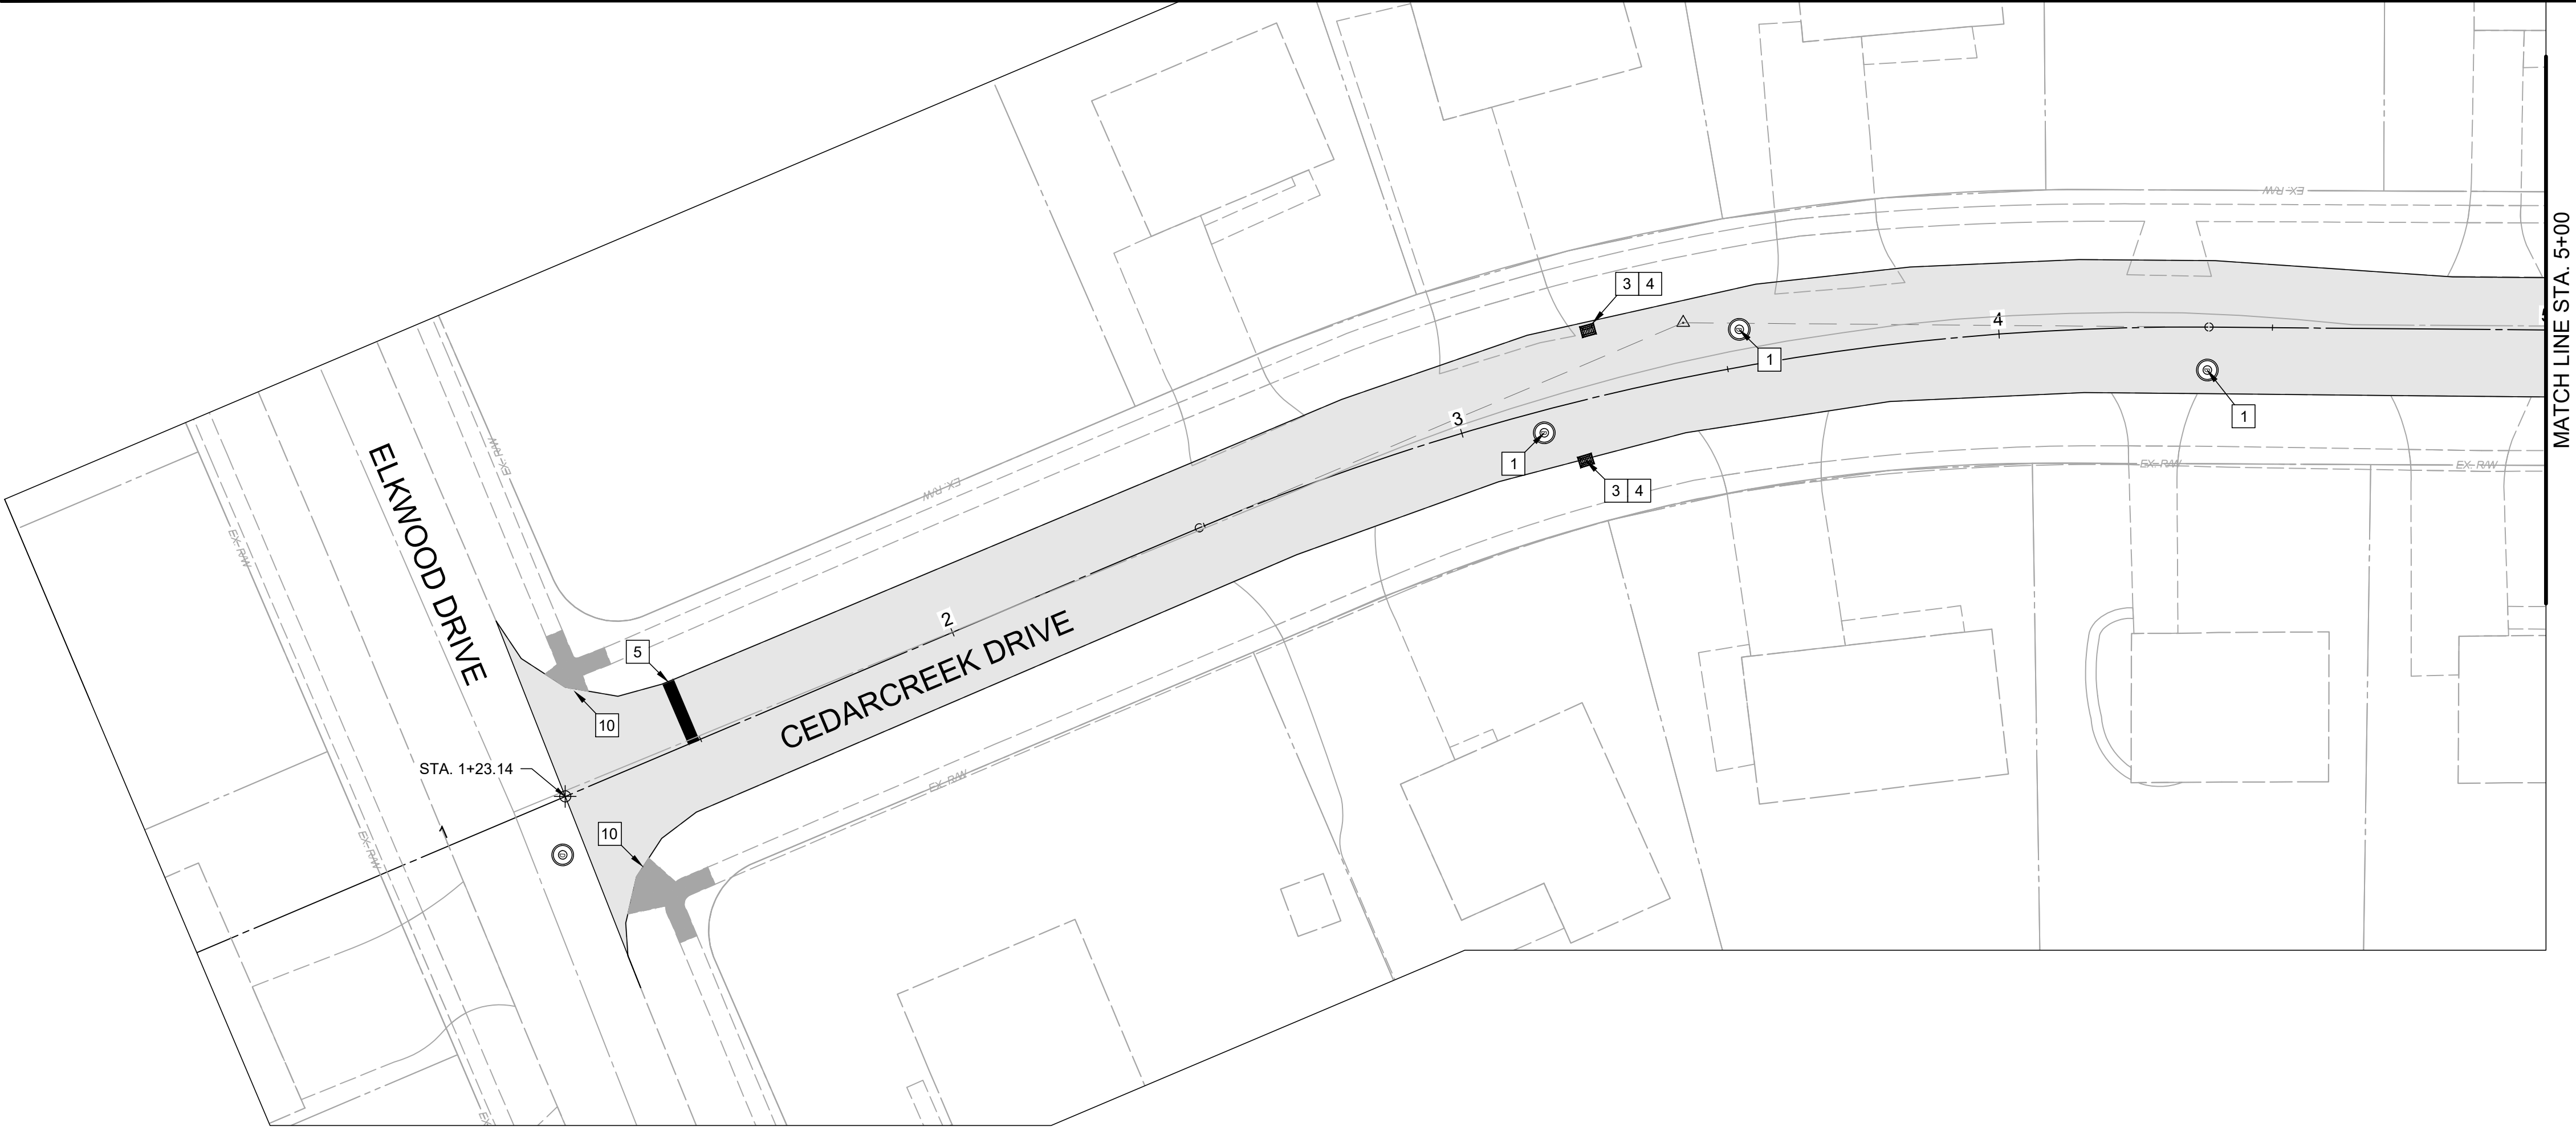

HATCH LEGEND	
	PAVEMENT PLANING AND OVERLAY
	REMOVE AND REPLACE CURB RAMP

NOTES	
1.	THE FINAL FULL DEPTH REPAIR AREAS WILL BE MARKED WHEN THE PLANING OPERATIONS HAVE BEEN COMPLETED.
2.	ADJUSTMENTS TO VALVE BOXES, METERS OR OTHER ASSOCIATED GAS, ELECTRIC, TELEPHONE, WATER, OR CABLE FACILITIES, IF NECESSARY, SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND SHALL BE COMPLETED PER UTILITY OWNER REQUIREMENTS.
3.	ALL PAVEMENT MARKINGS ON CARILLON BLVD SHOULD BE MADE TO MATCH EXISTING MARKINGS.
4.	RESTORE ALL DOWNSPOUT LINES IN CURB. A CONTINGENCY QUANTITY FOR ITEM 611 - DOWN SPOUT CONDUIT, MISC.: PVC SCHEDULE 40 PIPE, 3" HAS BEEN PROVIDED IN THE COST ESTIMATE.
5.	FINAL LOCATIONS IF CURB AND GUTTER REMOVE AND REPLACE TO BE MARKED IN FIELD BY ENGINEER



CONSTRUCTION NOTES	
1	ITEM 611 - MANHOLE ADJUSTED TO GRADE
2	ITEM 611 - FURNISH NEW CURB PLATE, D.G.I., AS PER PLAN
3	ITEM 611 - FURNISH NEW CURB PLATE, S.G.I., AS PER PLAN
4	ITEM 611 - FURNISH NEW CATCH BASIN FRAME AND TYPE "L" GRATE(S), AS PER PLAN
5	ITEM 644 - STOP LINE, 24" WHITE
6	ITEM 644 - DOUBLE CENTER LINE, 8" YELLOW
7	ITEM 644 - CROSSWALK, 12" WHITE
8	ITEM 632 - DETECTOR LOOP (POWERHEAD)
9	ITEM 632 - DETECTOR LOOP TIE IN
10	ITEM 609 - CURB RAMP REPLACEMENT

ISSUED FOR:	XX% REVIEW	NO	REVISION	DATE
ISSUE DATE:	03/10/25			
SCALE:	AS SHOWN			
DESIGNED BY:	AJAC			
DRAWN BY:	AJAC			
CHECKED BY:	EMOR			

FOREST PARK STREET PROGRAM
2025
FOREST PARK, OHIO

CEDARCREEK DR STA. 0+50 - STA. 5+00

PROJECT NO. 250070	
DISCIPLINE CIVIL	
SHEET NAME LAY1	
SHEET 3	OF 8


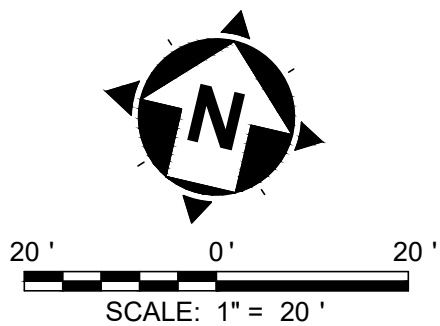
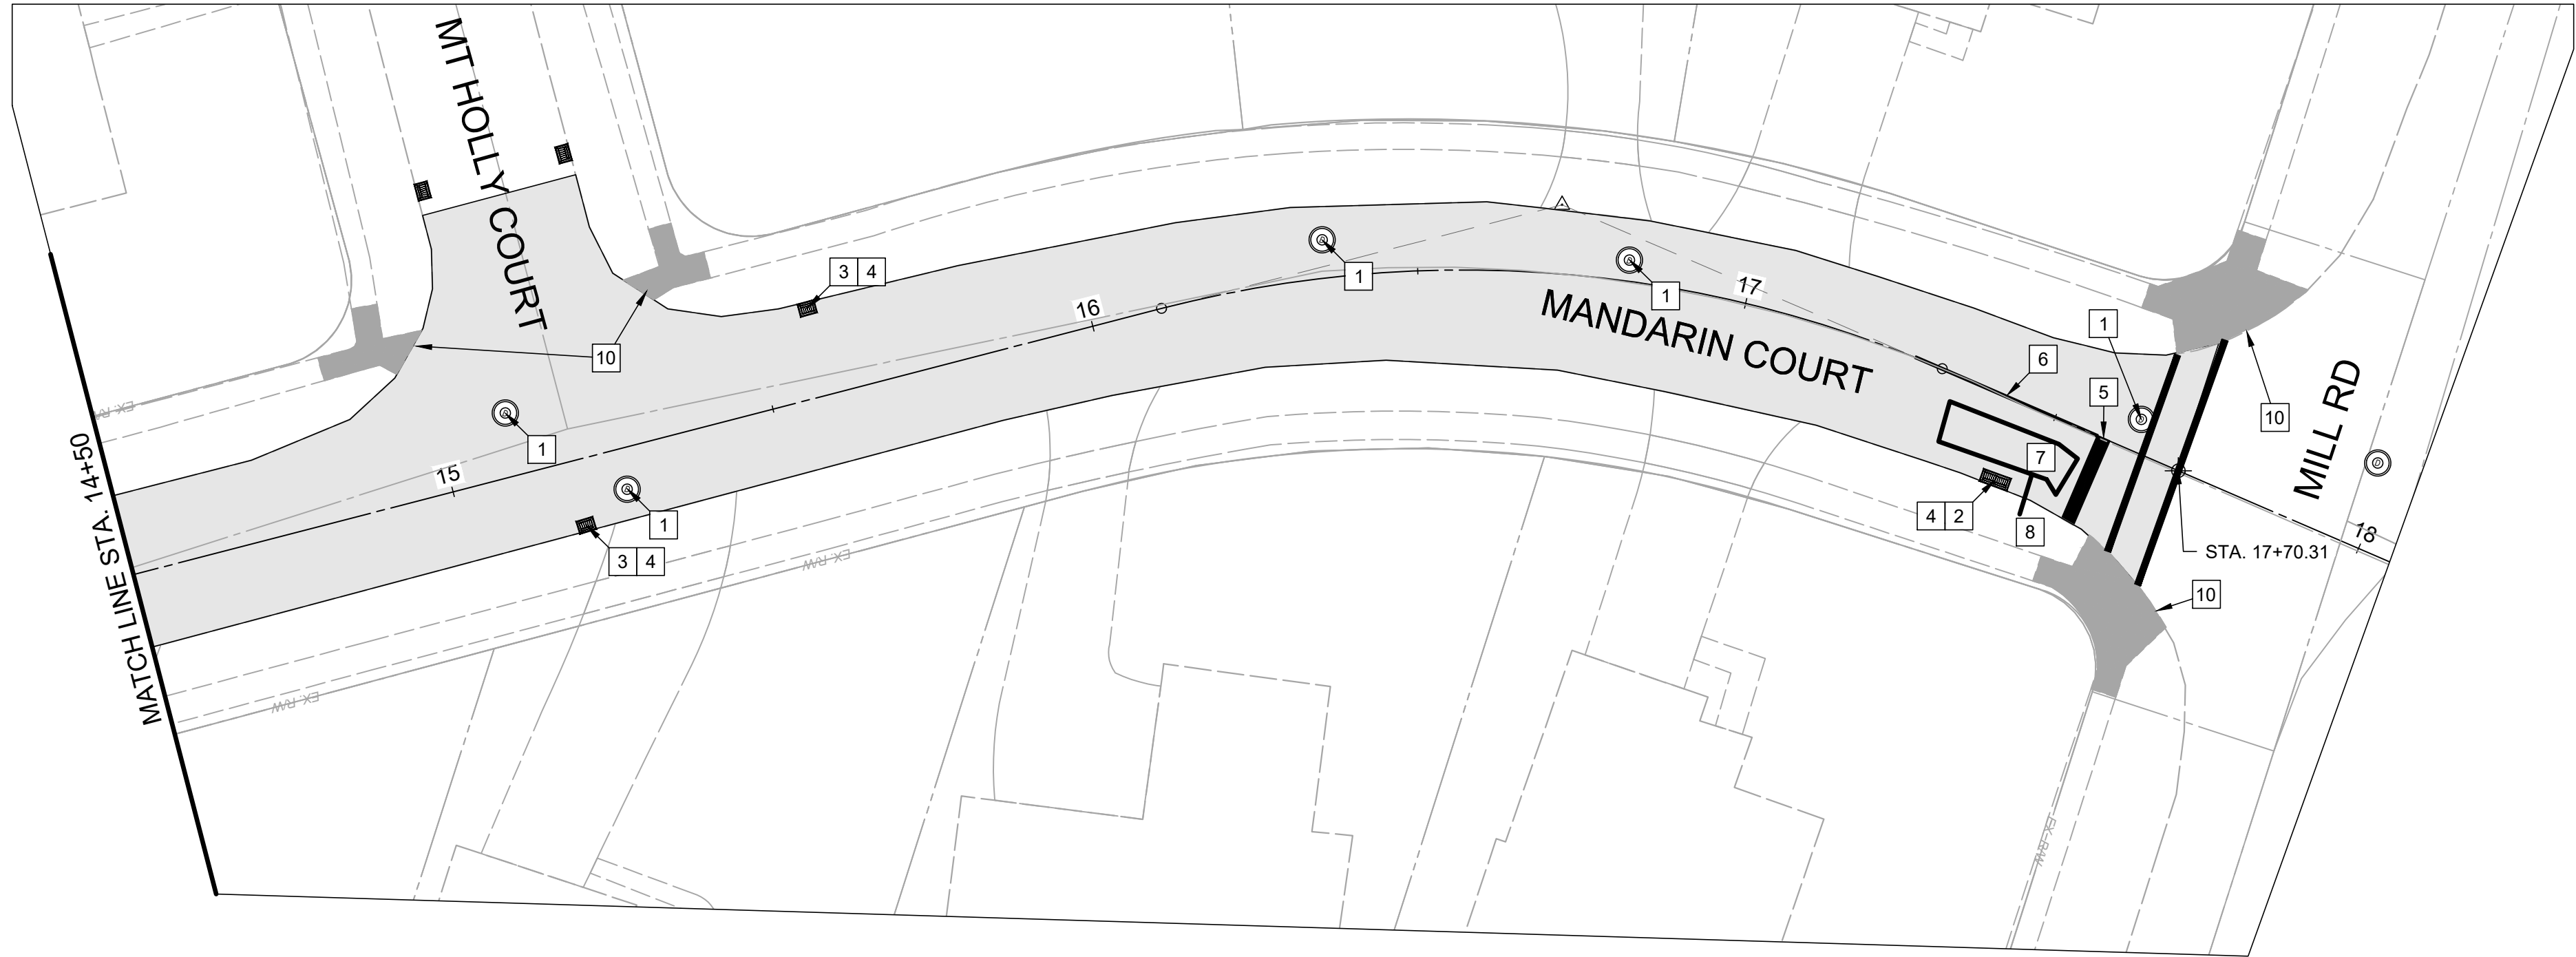


HATCH LEGEND	
	PAVEMENT PLANING AND OVERLAY
	REMOVE AND REPLACE CURB RAMP

NOTES	
1.	THE FINAL FULL DEPTH REPAIR AREAS WILL BE MARKED WHEN THE PLANING OPERATIONS HAVE BEEN COMPLETED.
2.	ADJUSTMENTS TO VALVE BOXES, METERS OR OTHER ASSOCIATED GAS, ELECTRIC, TELEPHONE, WATER, OR CABLE FACILITIES, IF NECESSARY, SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND SHALL BE COMPLETED PER UTILITY OWNER REQUIREMENTS.
3.	ALL PAVEMENT MARKINGS ON CARILLON BLVD SHOULD BE MADE TO MATCH EXISTING MARKINGS.
4.	RESTORE ALL DOWNSPOUT LINES IN CURB. A CONTINGENCY QUANTITY FOR ITEM 611 - DOWN SPOUT CONDUIT, MISC.: PVC SCHEDULE 40 PIPE, 3" HAS BEEN PROVIDED IN THE COST ESTIMATE.
5.	FINAL LOCATIONS IF CURB AND GUTTER REMOVE AND REPLACE TO BE MARKED IN FIELD BY ENGINEER

CONSTRUCTION NOTES	
1	ITEM 611 - MANHOLE ADJUSTED TO GRADE
2	ITEM 611 - FURNISH NEW CURB PLATE, D.G.I., AS PER PLAN
3	ITEM 611 - FURNISH NEW CURB PLATE, S.G.I., AS PER PLAN
4	ITEM 611 - FURNISH NEW CATCH BASIN FRAME AND TYPE "L" GRATE(S), AS PER PLAN
5	ITEM 644 - STOP LINE, 24" WHITE
6	ITEM 644 - DOUBLE CENTER LINE, 8" YELLOW
7	ITEM 644 - CROSSWALK, 12" WHITE
8	ITEM 632 - DETECTOR LOOP (POWERHEAD)
9	ITEM 632 - DETECTOR LOOP TIE IN
10	ITEM 609 - CURB RAMP REPLACEMENT

		DATE		REVISION		NO		ISSUED FOR: XX% REVIEW		ISSUE DATE: 03/10/25		SCALE: AS SHOWN		DESIGNED BY: AJAC		DRAWN BY: AJAC		CHECKED BY: EMOR	
FOREST PARK STREET PROGRAM										MANDARIN CT STA. 11+00 - STA. 18+00									
2025										FOREST PARK, OHIO									
PROJECT NO. 250070										DISCIPLINE CIVIL									
SHEET NAME LAY2										SHEET 4 OF 8									


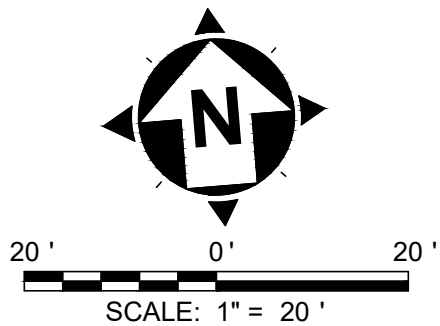
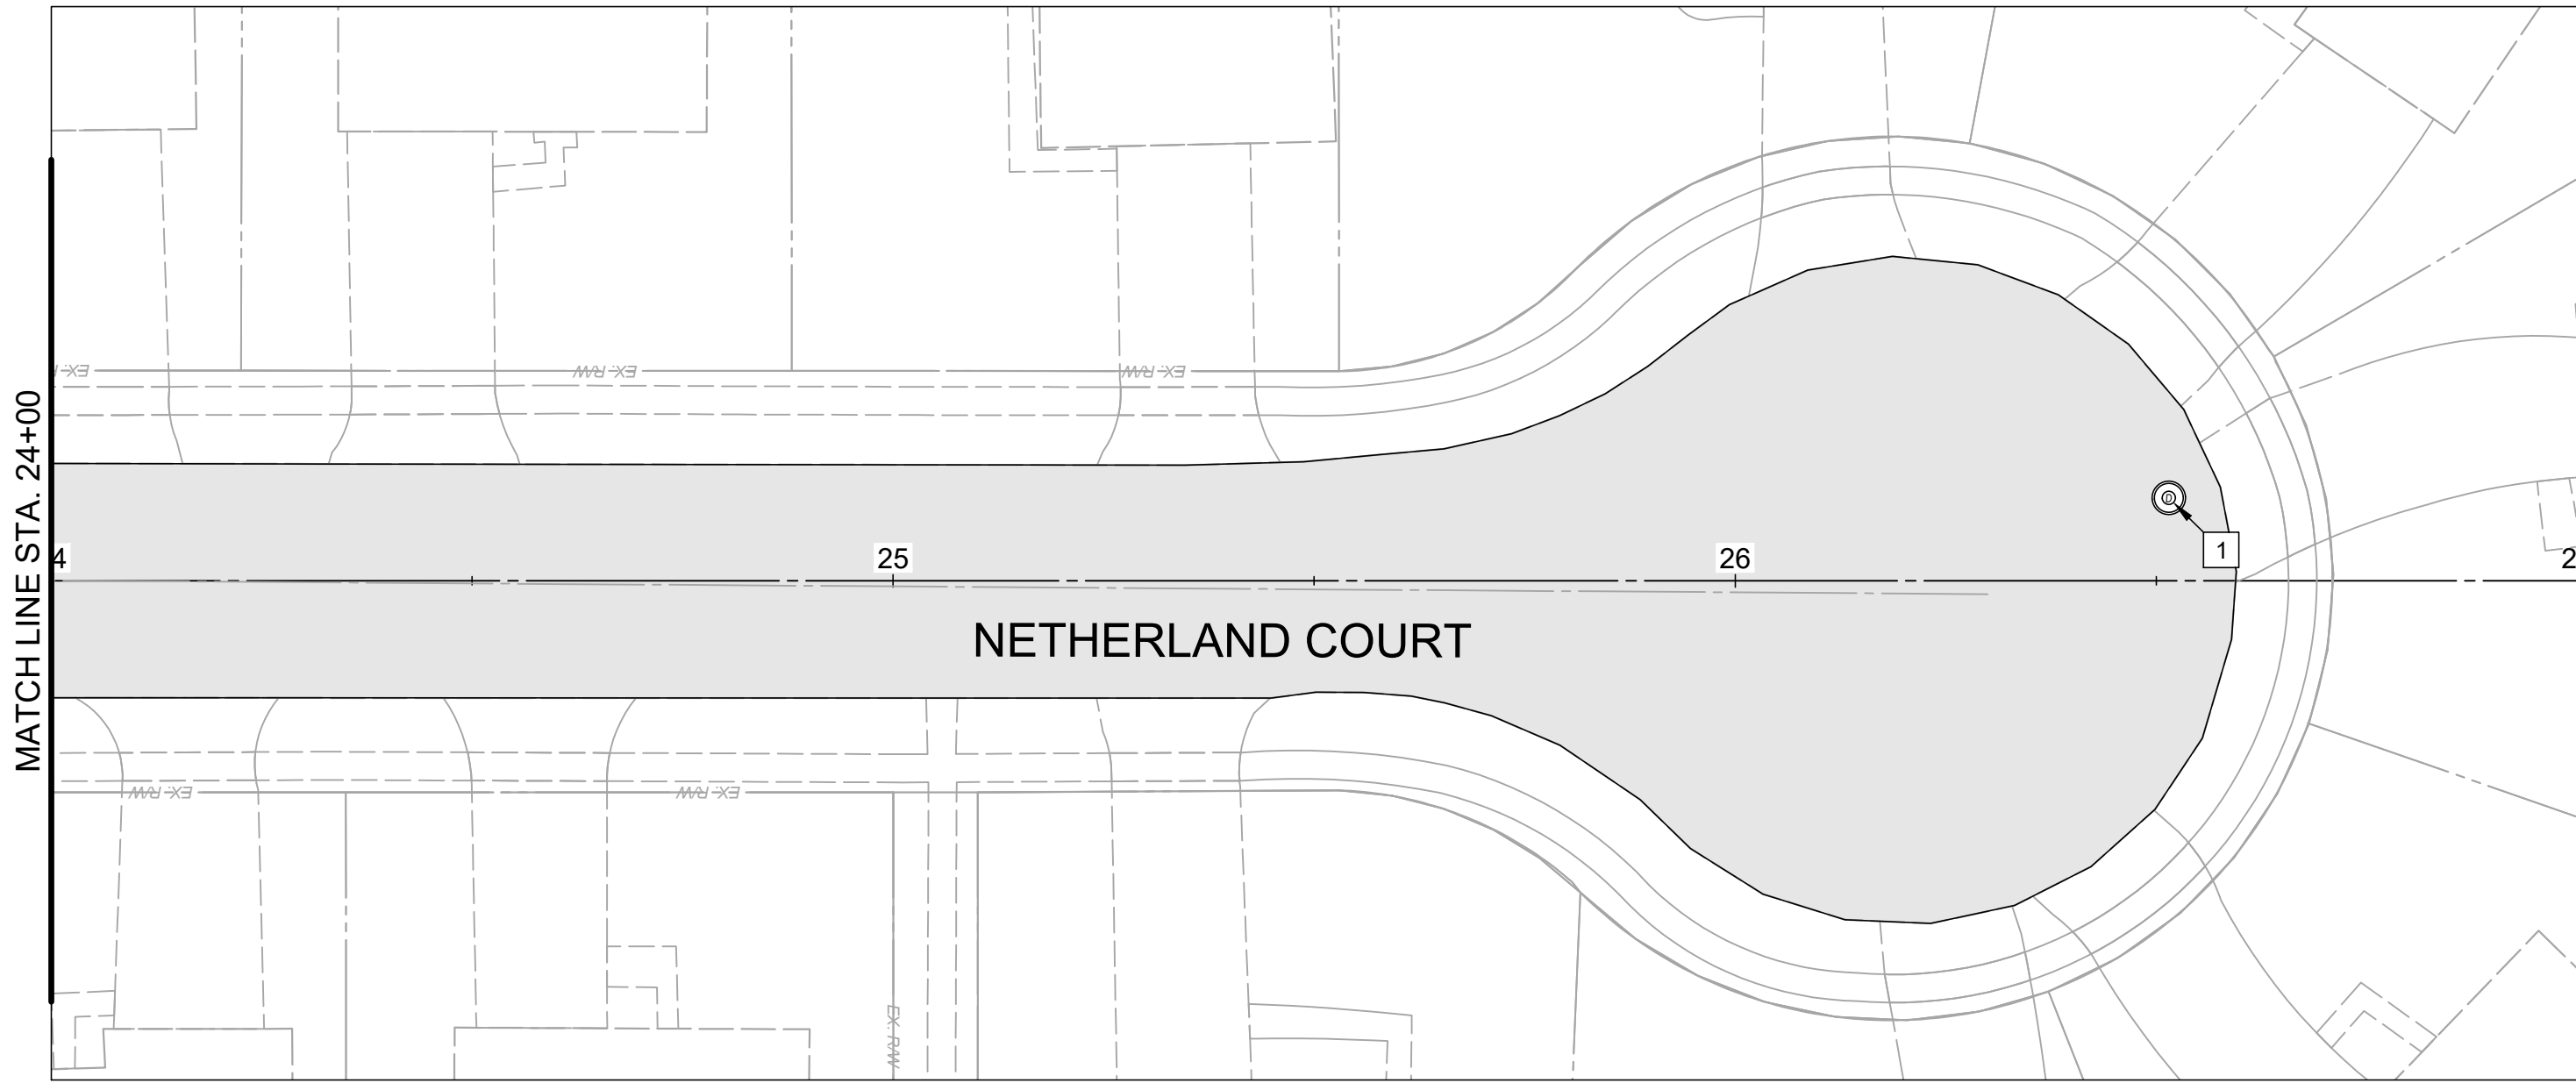
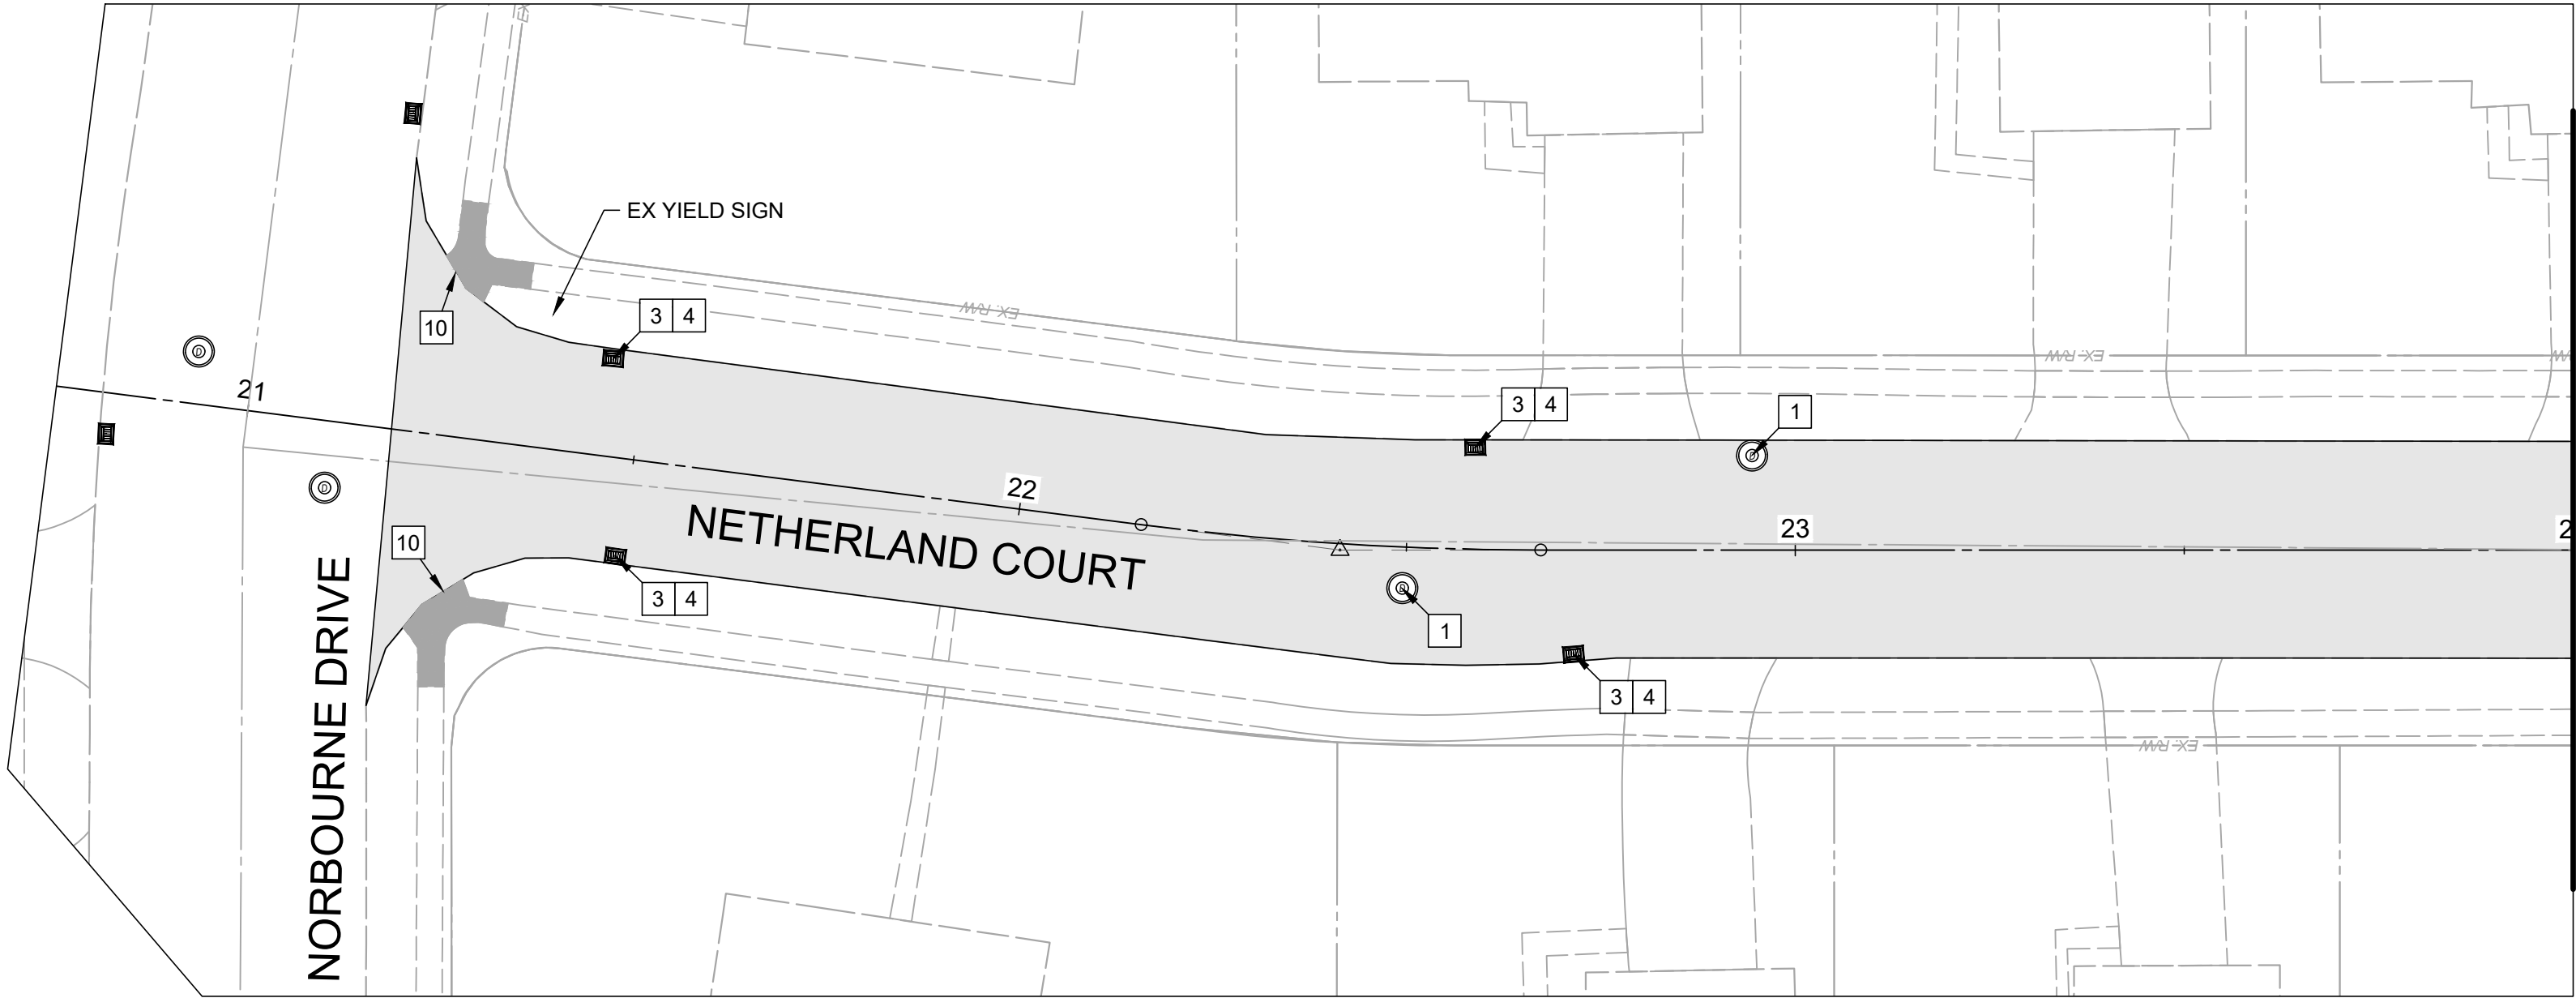


HATCH LEGEND	
	PAVEMENT PLANING AND OVERLAY
	REMOVE AND REPLACE CURB RAMP

NOTES	
1.	THE FINAL FULL DEPTH REPAIR AREAS WILL BE MARKED WHEN THE PLANING OPERATIONS HAVE BEEN COMPLETED.
2.	ADJUSTMENTS TO VALVE BOXES, METERS OR OTHER ASSOCIATED GAS, ELECTRIC, TELEPHONE, WATER, OR CABLE FACILITIES, IF NECESSARY, SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND SHALL BE COMPLETED PER UTILITY OWNER REQUIREMENTS.
3.	ALL PAVEMENT MARKINGS ON CARILLON BLVD SHOULD BE MADE TO MATCH EXISTING MARKINGS.
4.	RESTORE ALL DOWNSPOUT LINES IN CURB. A CONTINGENCY QUANTITY FOR ITEM 611 - DOWN SPOUT CONDUIT, MISC.: PVC SCHEDULE 40 PIPE, 3" HAS BEEN PROVIDED IN THE COST ESTIMATE.
5.	FINAL LOCATIONS IF CURB AND GUTTER REMOVE AND REPLACE TO BE MARKED IN FIELD BY ENGINEER

CONSTRUCTION NOTES	
1	ITEM 611 - MANHOLE ADJUSTED TO GRADE
2	ITEM 611 - FURNISH NEW CURB PLATE, D.G.I., AS PER PLAN
3	ITEM 611 - FURNISH NEW CURB PLATE, S.G.I., AS PER PLAN
4	ITEM 611 - FURNISH NEW CATCH BASIN FRAME AND TYPE "L" GRATE(S), AS PER PLAN
5	ITEM 644 - STOP LINE, 24" WHITE
6	ITEM 644 - DOUBLE CENTER LINE, 8" YELLOW
7	ITEM 644 - CROSSWALK, 12" WHITE
8	ITEM 632 - DETECTOR LOOP (POWERHEAD)
9	ITEM 632 - DETECTOR LOOP TIE IN
10	ITEM 609 - CURB RAMP REPLACEMENT

FOREST PARK STREET PROGRAM 2025 FOREST PARK, OHIO NETHERLAND CT STA. 21+00 - STA. 27+00		PROJECT NO.		250070		
		DISCIPLINE		CIVIL		
		SHEET NAME		LAY3		
		SHEET	5	OF	8	
		ISSUED FOR:	XX% REVIEW	NO	REVISION	DATE
		ISSUE DATE:	03/10/25			
		SCALE:	AS SHOWN			
		DESIGNED BY:	AJAC			
		DRAWN BY:	AJAC			
		CHECKED BY:	EMOR			

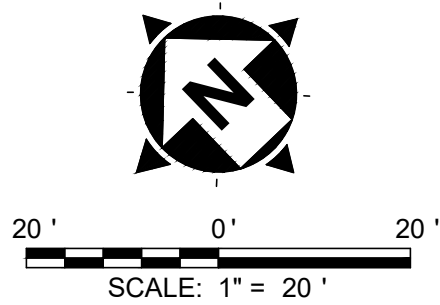
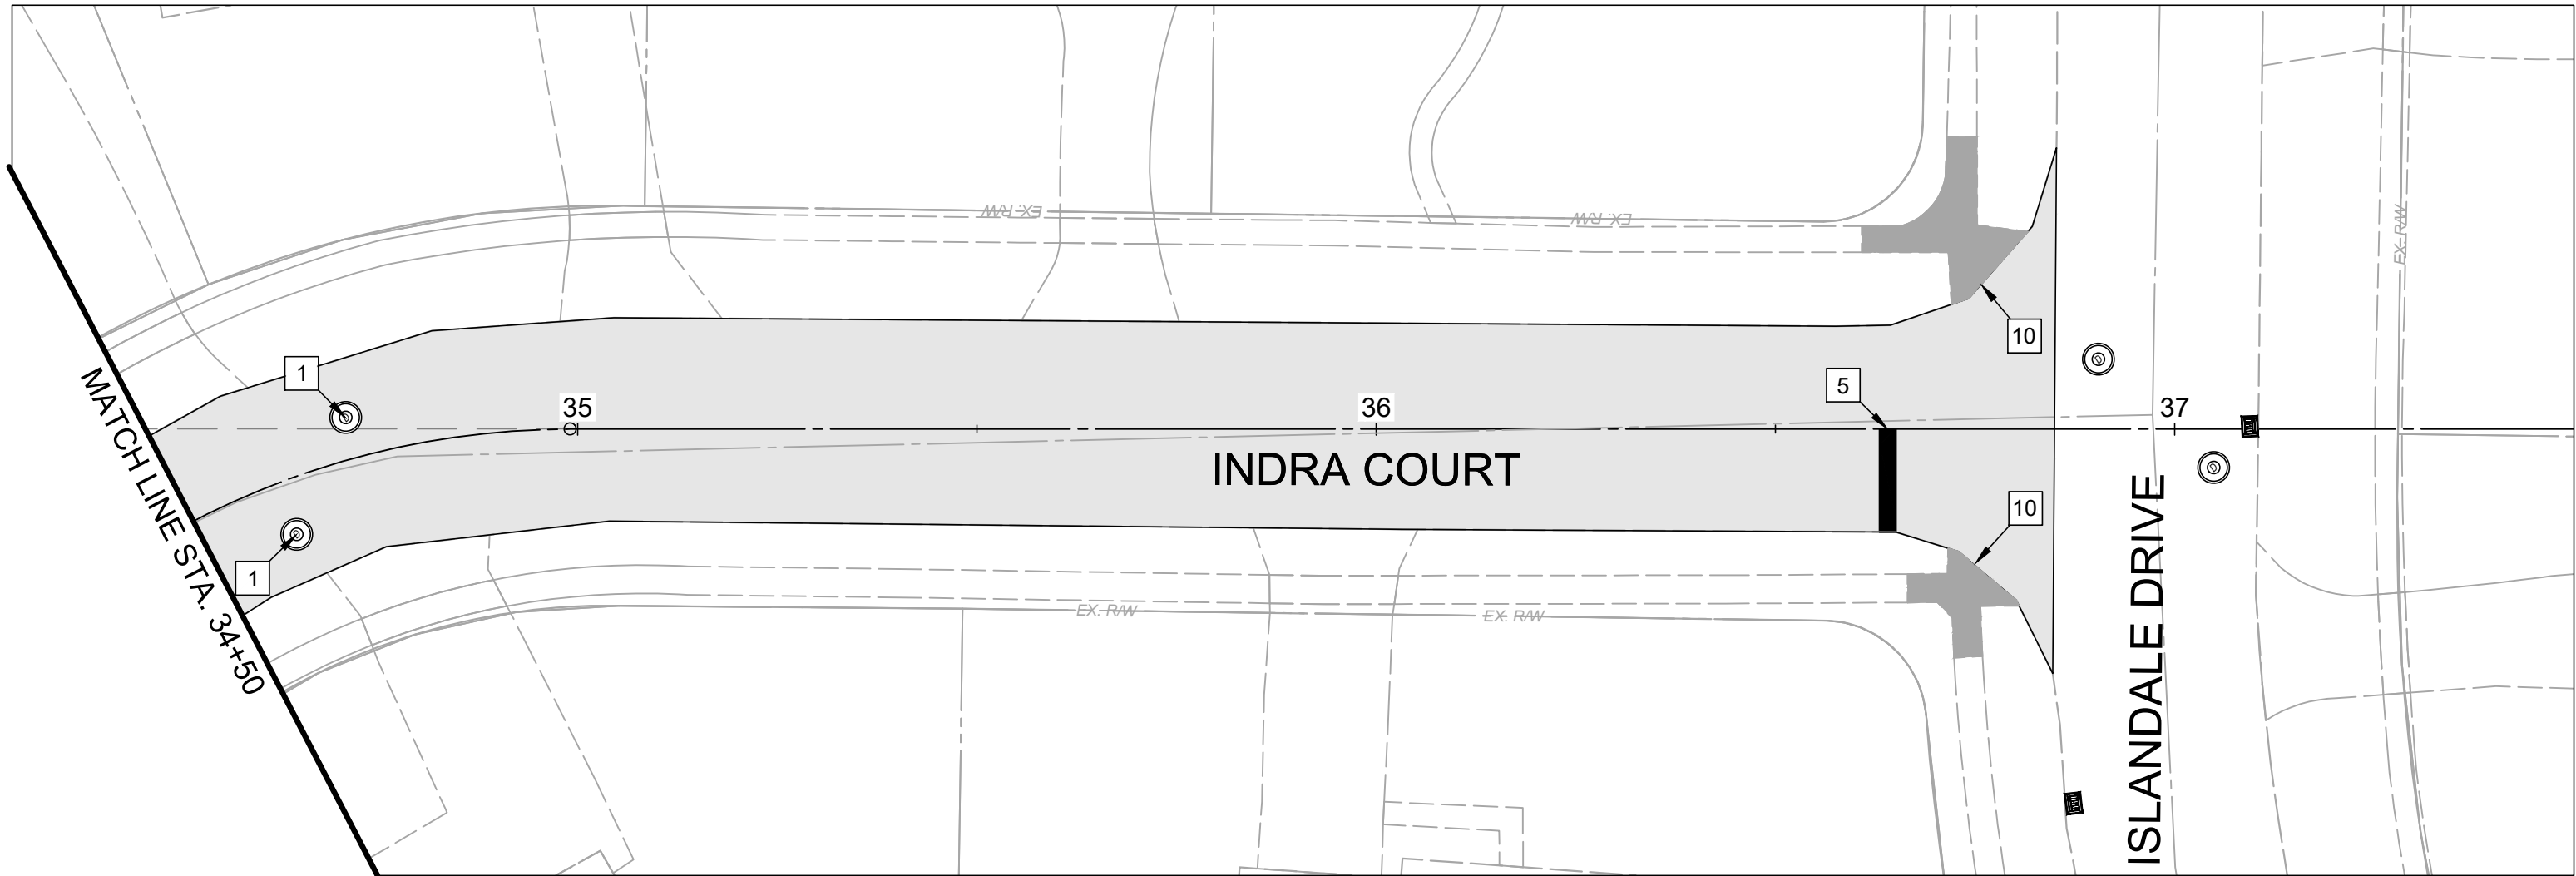
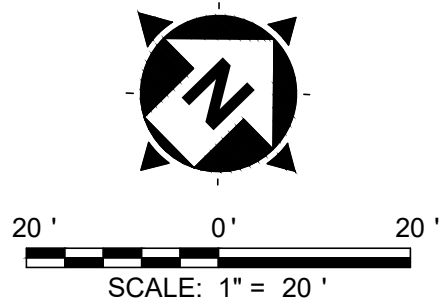
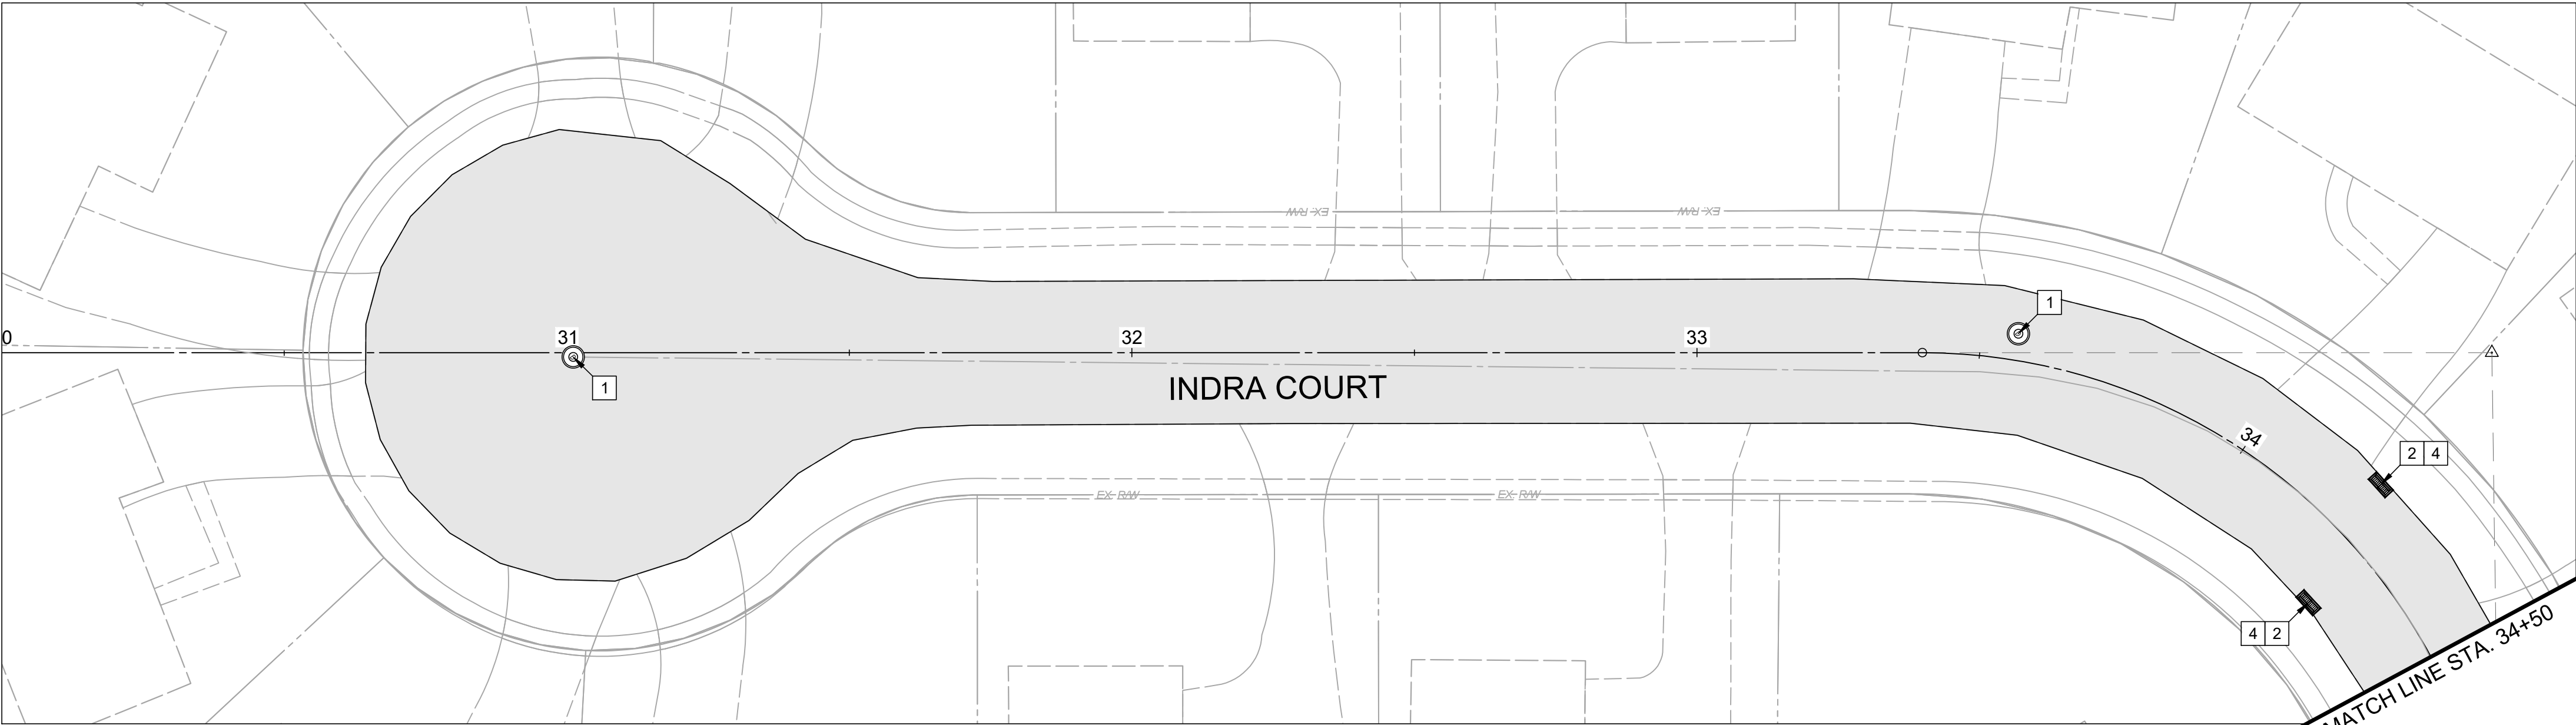


HATCH LEGEND	
	PAVEMENT PLANING AND OVERLAY
	REMOVE AND REPLACE CURB RAMP

NOTES	
1.	THE FINAL FULL DEPTH REPAIR AREAS WILL BE MARKED WHEN THE PLANING OPERATIONS HAVE BEEN COMPLETED.
2.	ADJUSTMENTS TO VALVE BOXES, METERS OR OTHER ASSOCIATED GAS, ELECTRIC, TELEPHONE, WATER, OR CABLE FACILITIES, IF NECESSARY, SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND SHALL BE COMPLETED PER UTILITY OWNER REQUIREMENTS.
3.	ALL PAVEMENT MARKINGS ON CARILLON BLVD SHOULD BE MADE TO MATCH EXISTING MARKINGS.
4.	RESTORE ALL DOWNSPOUT LINES IN CURB. A CONTINGENCY QUANTITY FOR ITEM 611 - DOWN SPOUT CONDUIT, MISC.: PVC SCHEDULE 40 PIPE, 3" HAS BEEN PROVIDED IN THE COST ESTIMATE.
5.	FINAL LOCATIONS IF CURB AND GUTTER REMOVE AND REPLACE TO BE MARKED IN FIELD BY ENGINEER

CONSTRUCTION NOTES	
1	ITEM 611 - MANHOLE ADJUSTED TO GRADE
2	ITEM 611 - FURNISH NEW CURB PLATE, D.G.I., AS PER PLAN
3	ITEM 611 - FURNISH NEW CURB PLATE, S.G.I., AS PER PLAN
4	ITEM 611 - FURNISH NEW CATCH BASIN FRAME AND TYPE "L" GRATE(S), AS PER PLAN
5	ITEM 644 - STOP LINE, 24" WHITE
6	ITEM 644 - DOUBLE CENTER LINE, 8" YELLOW
7	ITEM 644 - CROSSWALK, 12" WHITE
8	ITEM 632 - DETECTOR LOOP (POWERHEAD)
9	ITEM 632 - DETECTOR LOOP TIE IN
10	ITEM 609 - CURB RAMP REPLACEMENT

FOREST PARK STREET PROGRAM 2025 FOREST PARK, OHIO										INDRA CT STA. 30+00 - STA. 37+00										verdantas									
PROJECT NO.										250070										DATE									
DISCIPLINE										CIVIL										REVISION									
SHEET NAME										LAY4										NO									
SHEET					6					OF					8					ISSUED FOR: XX% REVIEW					03/10/25				
																				SCALE: AS SHOWN									
																				DESIGNED BY: AJAC									
																				DRAWN BY: AJAC									
																				CHECKED BY: EMOR									

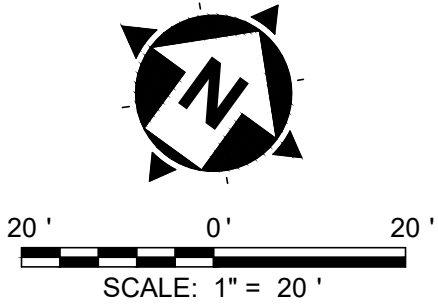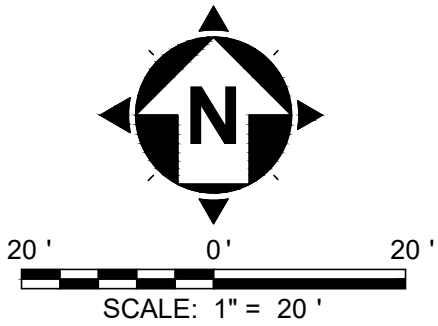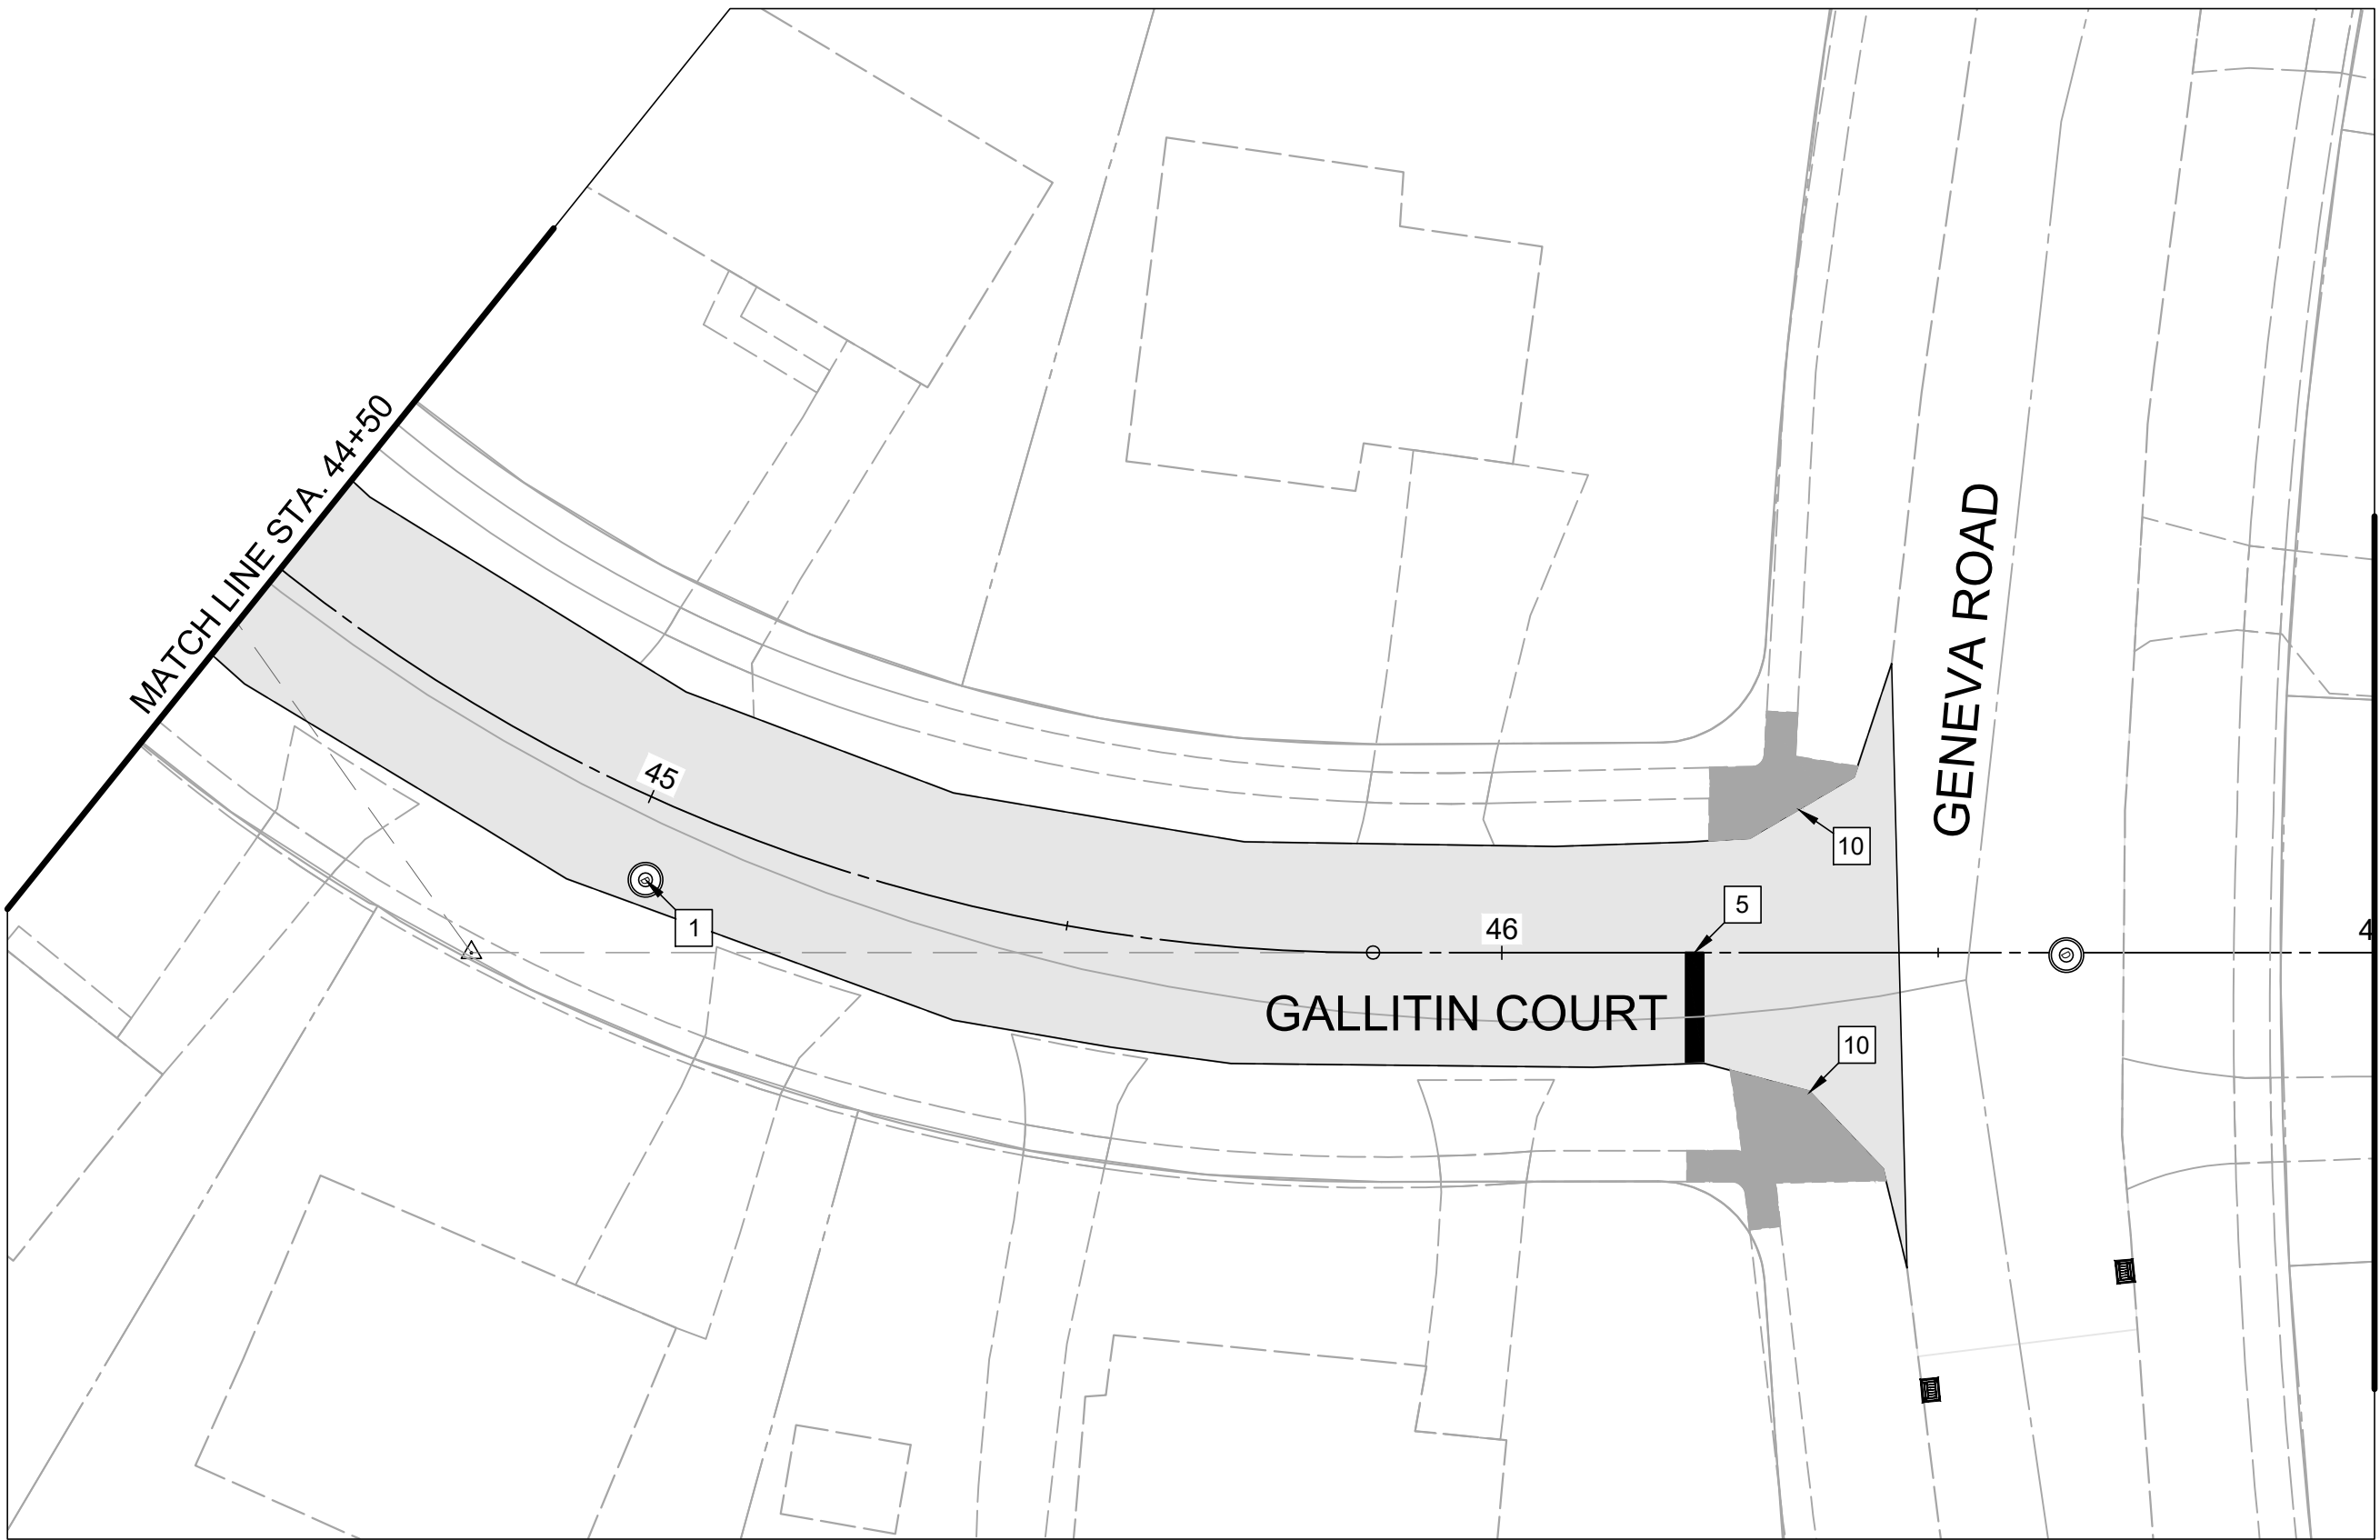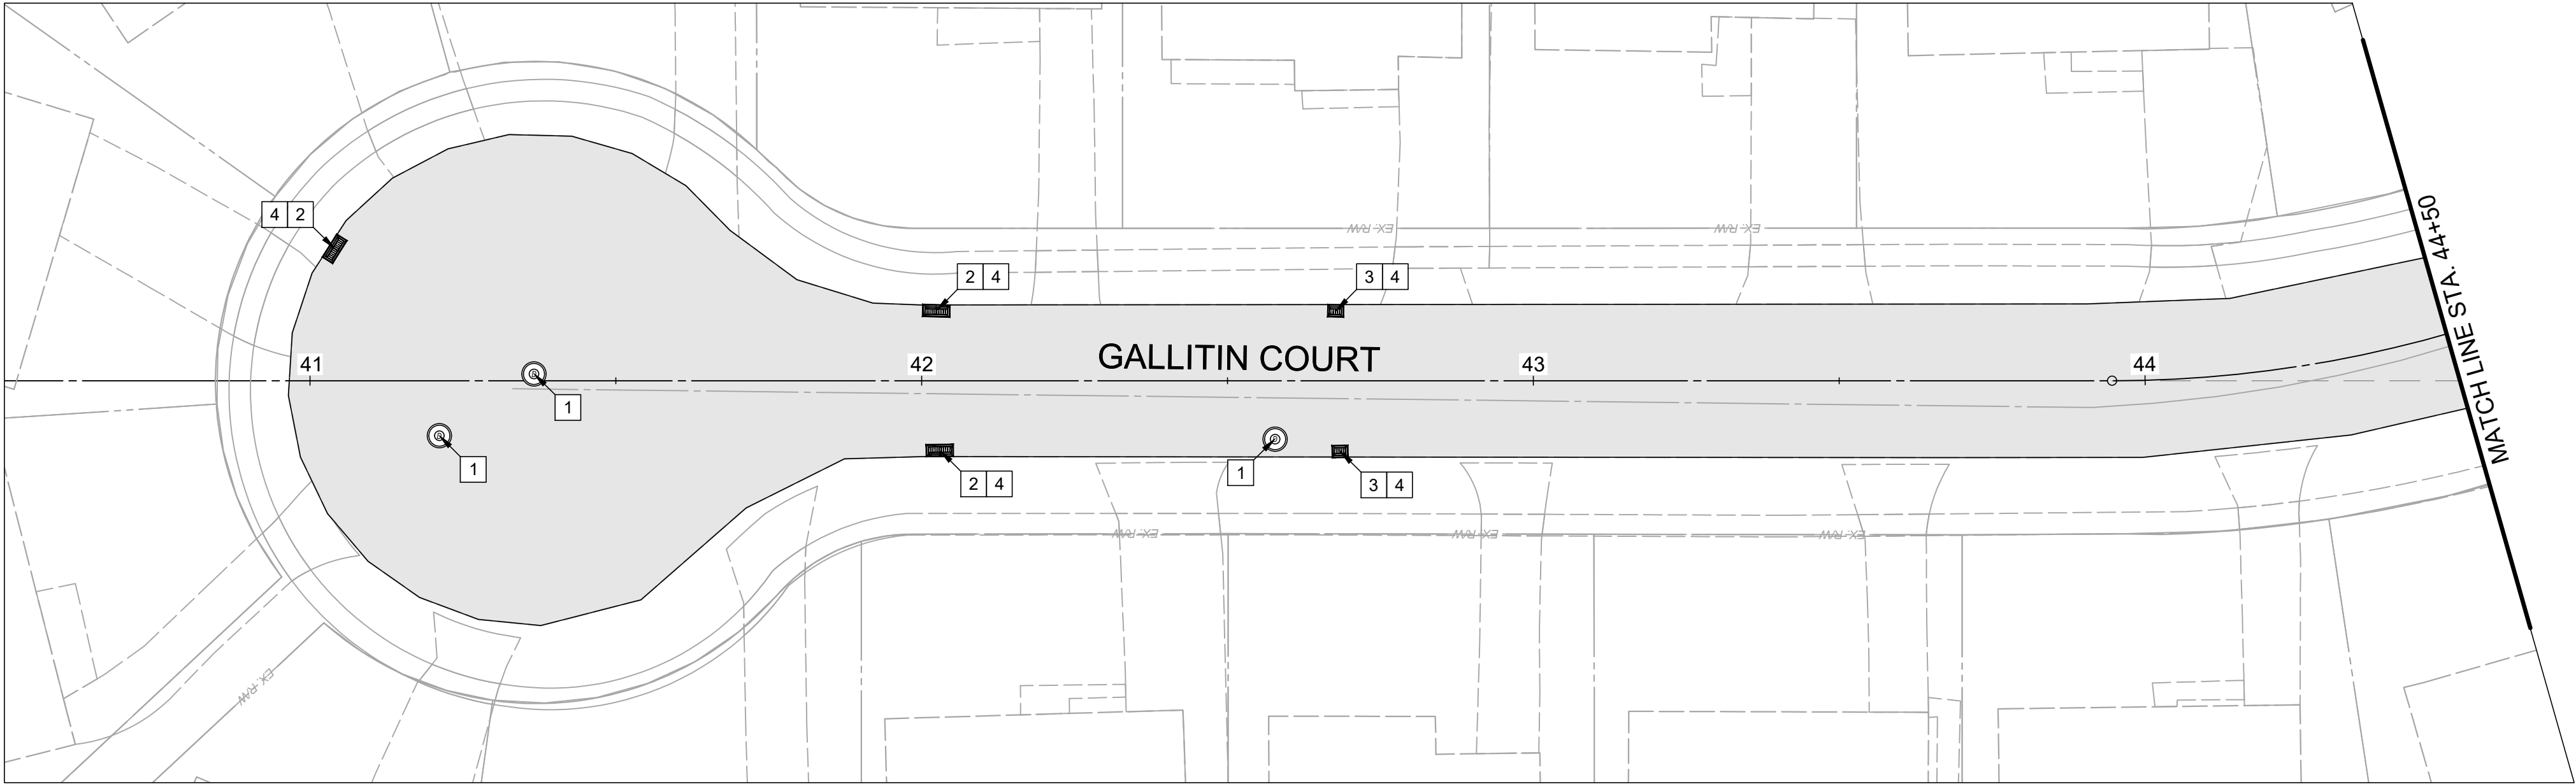

HATCH LEGEND	
	PAVEMENT PLANING AND OVERLAY
	REMOVE AND REPLACE CURB RAMP


NOTES	
1.	THE FINAL FULL DEPTH REPAIR AREAS WILL BE MARKED WHEN THE PLANING OPERATIONS HAVE BEEN COMPLETED.
2.	ADJUSTMENTS TO VALVE BOXES, METERS OR OTHER ASSOCIATED GAS, ELECTRIC, TELEPHONE, WATER, OR CABLE FACILITIES, IF NECESSARY, SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND SHALL BE COMPLETED PER UTILITY OWNER REQUIREMENTS.
3.	ALL PAVEMENT MARKINGS ON CARILLON BLVD SHOULD BE MADE TO MATCH EXISTING MARKINGS.
4.	RESTORE ALL DOWNSPOUT LINES IN CURB. A CONTINGENCY QUANTITY FOR ITEM 611 - DOWN SPOUT CONDUIT, MISC.: PVC SCHEDULE 40 PIPE, 3" HAS BEEN PROVIDED IN THE COST ESTIMATE.
5.	FINAL LOCATIONS IF CURB AND GUTTER REMOVE AND REPLACE TO BE MARKED IN FIELD BY ENGINEER

CONSTRUCTION NOTES	
1	ITEM 611 - MANHOLE ADJUSTED TO GRADE
2	ITEM 611 - FURNISH NEW CURB PLATE, D.G.I., AS PER PLAN
3	ITEM 611 - FURNISH NEW CURB PLATE, S.G.I., AS PER PLAN
4	ITEM 611 - FURNISH NEW CATCH BASIN FRAME AND TYPE "L" GRATE(S), AS PER PLAN
5	ITEM 644 - STOP LINE, 24" WHITE
6	ITEM 644 - DOUBLE CENTER LINE, 8" YELLOW
7	ITEM 644 - CROSSWALK, 12" WHITE
8	ITEM 632 - DETECTOR LOOP (POWERHEAD)
9	ITEM 632 - DETECTOR LOOP TIE IN
10	ITEM 609 - CURB RAMP REPLACEMENT

DATE					
REVISION					
NO					
ISSUED FOR:	XX% REVIEW	03/10/25	AS SHOWN	AJAC	AJAC
ISSUE DATE:					
SCALE:					
DESIGNED BY:					
DRAWN BY:					
CHECKED BY:					


FOREST PARK STREET PROGRAM 2025 FOREST PARK, OHIO	PROJECT NO. 250070
	DISCIPLINE CIVIL
	SHEET NAME LAY5
	SHEET 7

GALLITIN CT STA. 40+50 - STA. 47+00	
-------------------------------------	--

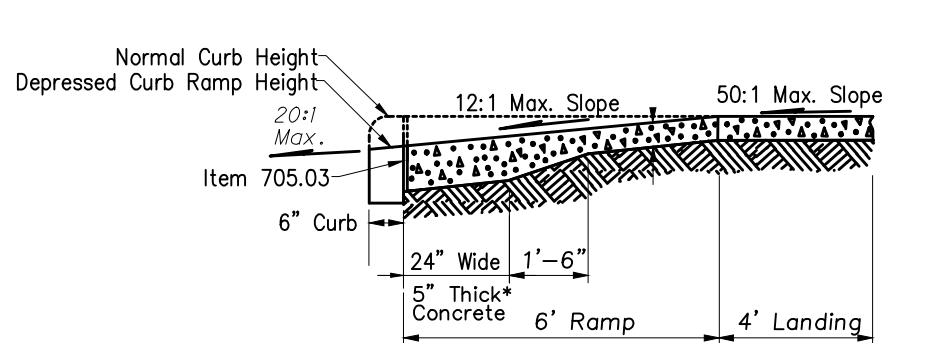


SECTION A-A

*WHERE POSSIBLE, POUR RAMP AREA INTEGRAL WITH THE CURB, OTHERWISE USE 6" THICK WALK.

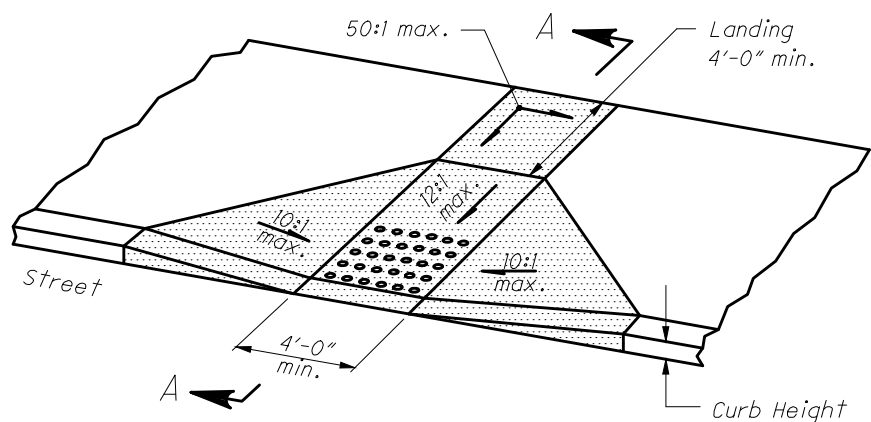

CURB RAMP DETAILS

N.T.S.

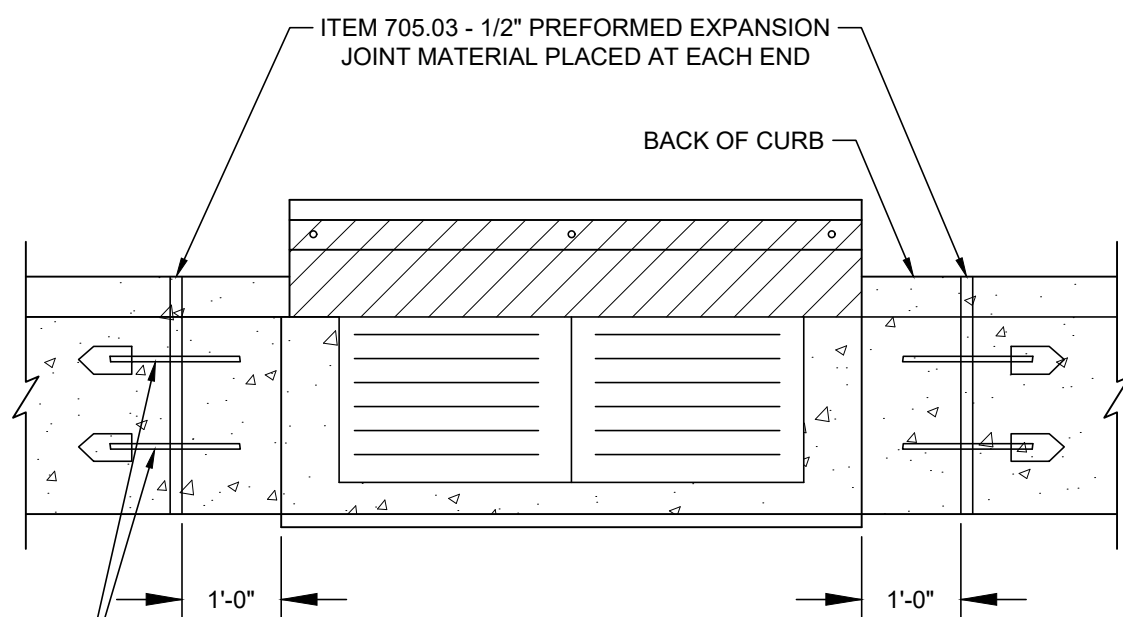


PROVIDE 2 - 5/8" DIAMETER DOWELS, 18" LONG, DRILLED 9" MINIMUM INTO EXISTING CONCRETE CURB AT EACH END OF REPAIR

NOTE:

- 1.) SEE ODOT STANDARD DRAWINGS CB-3 & CB-3A

CURB REPLACEMENT ADJACENT TO CATCH BASINS

N.T.S.

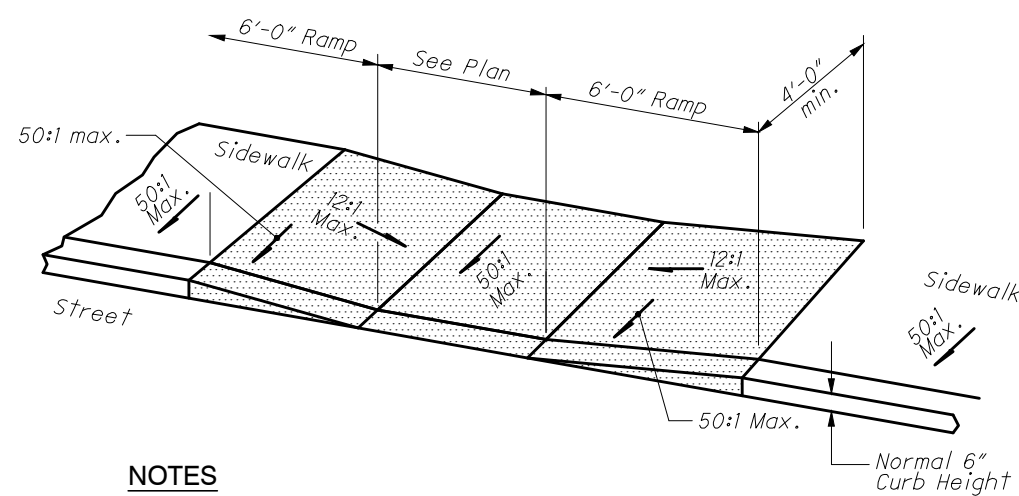

NOTES


DRAINAGE:

CONTRACTOR IS TO ENSURE THE BASE OF EACH CONSTRUCTED CURB RAMP ALLOWS FOR PROPER DRAINAGE, WITHOUT EXCEEDING ALLOWABLE CROSS SLOPE OR RAMP SLOPES. VERTICAL CHANGE IN LEVEL EXCEEDING 1/8" BETWEEN THE 1) PAVEMENT AND GUTTER, AND 2) GUTTER AND RAMP, ARE NOT ALLOWED.

TEXTURE:

TEXTURE CONCRETE SURFACES BY COARSE BROOMING TRANSVERSE TO THE RAMP SLOPES TO BE ROUGHER THAN THE ADJACENT WALK.

THE EDGE OF THE CURB SHALL BE FLUSH WITH THE EDGE OF THE ADJACENT PAVEMENT AND GUTTER AND SURFACE SLOPES THAT MEET GRADE BREAKS SHALL ALSO BE FLUSH.

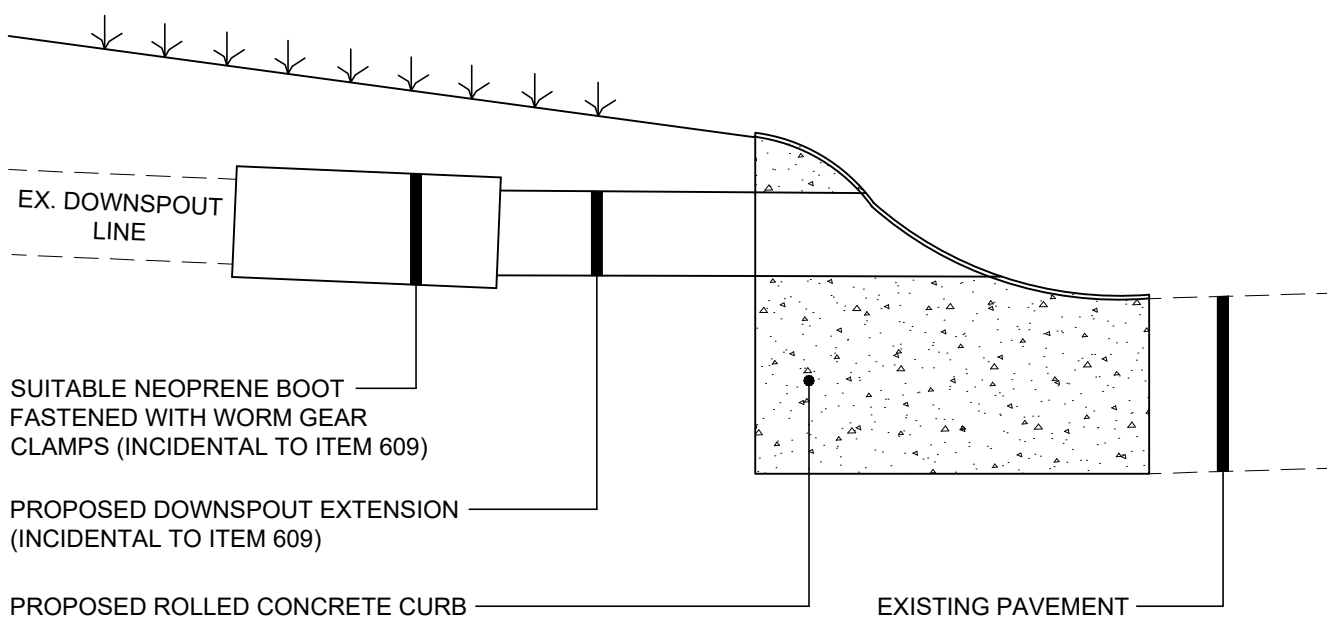


NOTES:

- 1.) 3" PVC PIPE SCH. 40, (SLOPED TO DRAIN) MAY BE CAST-IN-PLACE AT TIME OF CONSTRUCTION WITH 3" SLOT IN CURB. FOR INSTALLATION AFTER CURB IS CONSTRUCTED, THE CURB SLOT MUST BE SAW CUT (4.5" MAX. WIDTH) AND THE AREA FILLED WITH AN EPOXY CONCRETE. TYPE OF EPOXY CONCRETE TO BE APPROVED BY THE OWNER / ENGINEER BEFORE USED BY THE CONTRACTOR.
- 2.) THE COST FOR THE LABOR AND MATERIAL NECESSARY TO REPLACE THE DOWNSPOUT LEADER SHALL BE INCIDENTAL TO THE PERTINENT CURB REPLACEMENT ITEM FOR EACH DOWNSPOUT REPLACED THREE (3) FEET IN LENGTH. TOPSOIL AND SEEDING SHALL BE INCIDENTAL IN COSTS.
- 3.) IF AT THE DIRECTION OF THE ENGINEER, MORE THAN 3' OF DOWNSPOUT DRAIN NEEDS TO BE REPLACED, THE ADDITIONAL WORK SHALL BE PAID ON A PER FOOT BASIS UNDER ITEM 603 - 3" PVC PIPE SCH. 40. ANY NECESSARY VERTICAL OR HORIZONTAL BENDS SHALL BE INCLUDED AND PAID FOR ON THE ABOVE BASIS.

ITEM 611 - DOWNSPOUT EXTENSION

N.T.S.

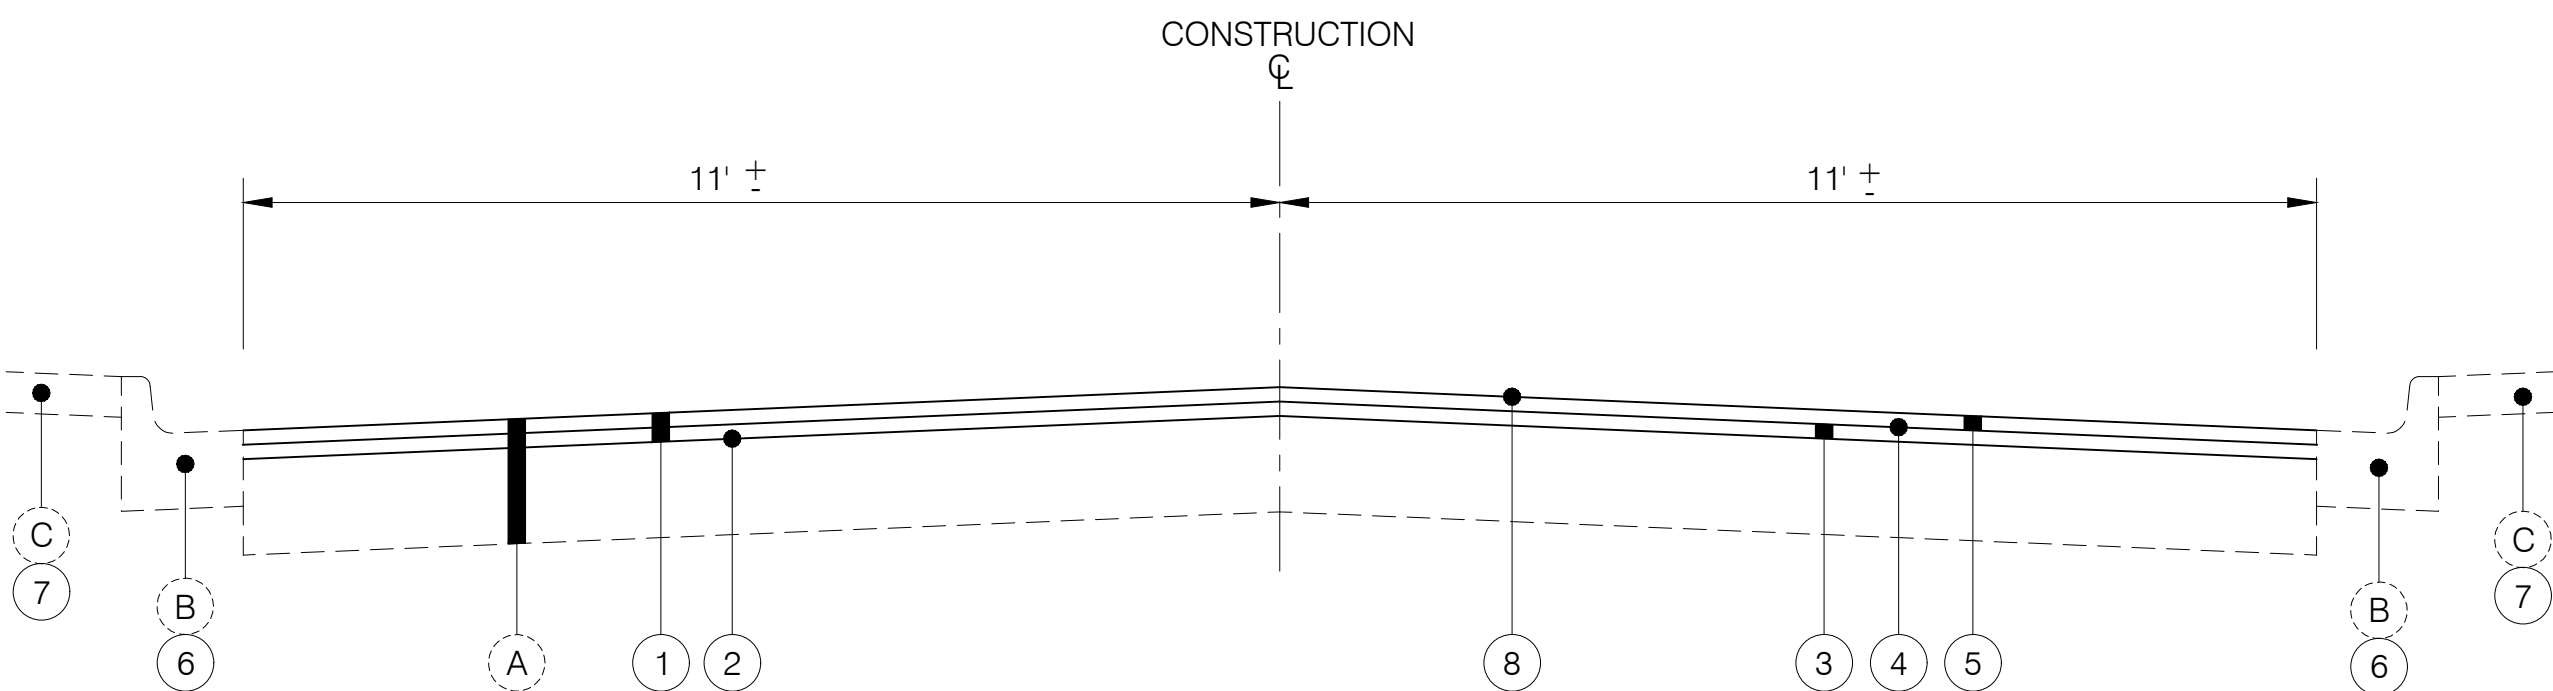

- ① ITEM 254 - PAVEMENT PLANING, ASPHALT CONCRETE (2-1/2")
- ② ITEM 441 - ASPHALT CONCRETE MISC: STRESS ABSORBING MEMBRANE (SAM)
- ③ ITEM 441 - ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 2, PG64-22 (1")
- ④ ITEM 407 - TACK COAT FOR INTERMEDIATE COURSE (@ 0.06 Gals/SY)


- ⑤ ITEM 441 - ASPHALT CONCRETE SURFACE COURSE, TYPE 1, PG64-22 (1-1/2")
- ⑥ ITEM 609 - CURB, TYPE 2 REPLACEMENT, SEE PLAN FOR LOCATIONS
- ⑦ ITEM 608 - CONCRETE WALK/DRIVE REPLACEMENT, SEE PLAN FOR LOCATIONS
- ⑧ ITEM SPL - ASPHALT CONCRETE MISC., ASPHALT REJUVENATING AGENT

EXISTING LEGEND

- Ⓐ EXISTING ASPHALT PAVEMENT
- Ⓑ EXISTING CONCRETE CURB
- Ⓒ EXISTING CONCRETE WALK/DRIVE

TYPICAL SECTION

N.T.S.

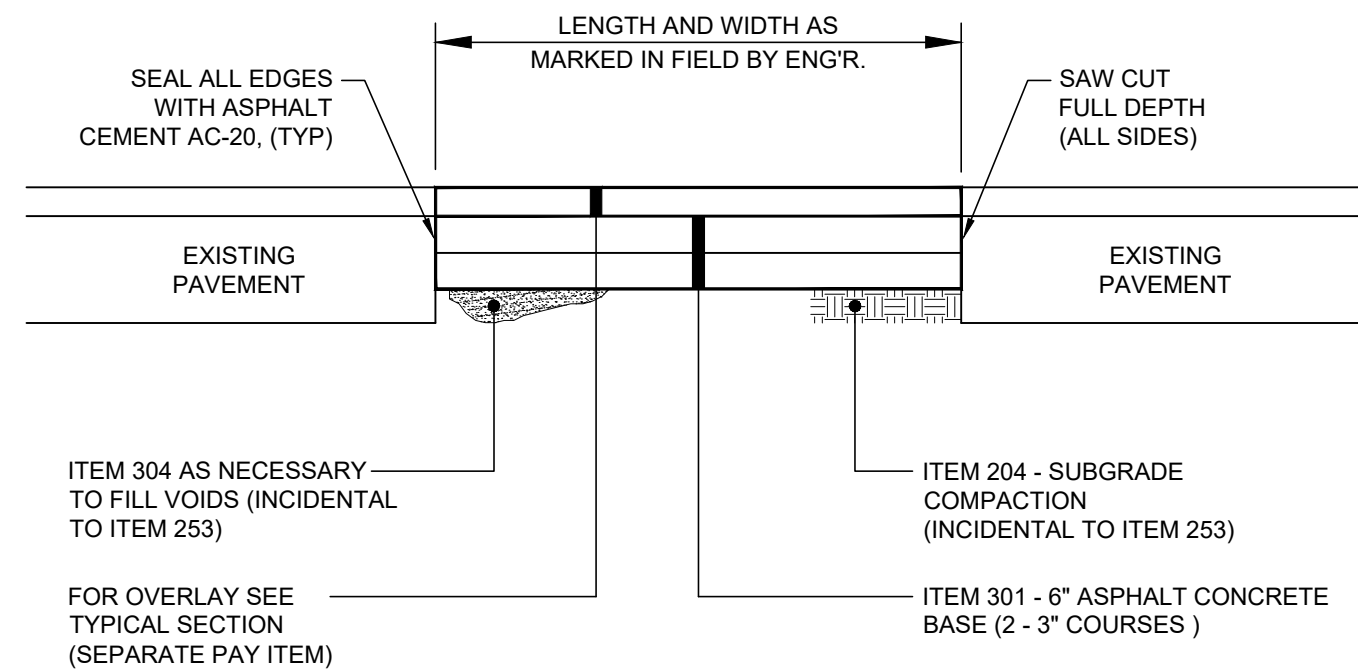


NOTES:

- 1.) A CONTINGENCY QUANTITY OF ITEM 253 - PAVEMENT REPAIR IS INCLUDED IN THE CONTRACT TO REPLACE ANY PAVEMENT / BASE AREAS AS REQUIRED PRIOR TO PAVING. THE CONTRACTOR SHALL REPAIR ONLY THOSE AREAS MARKED IN THE FIELD BY THE ENGINEER AFTER THE PLANING OPERATIONS.
- 2.) THE BASE REPAIR AREAS WILL BE MARKED BY THE ENGINEER PRIOR TO THE PLANING OPERATIONS TO OBTAIN INITIAL QUANTITIES AND AFTER THE PAVEMENT PLANING FOR THE FINAL AREAS TO BE REPAIRED.

PAVEMENT REPAIR

N.T.S.

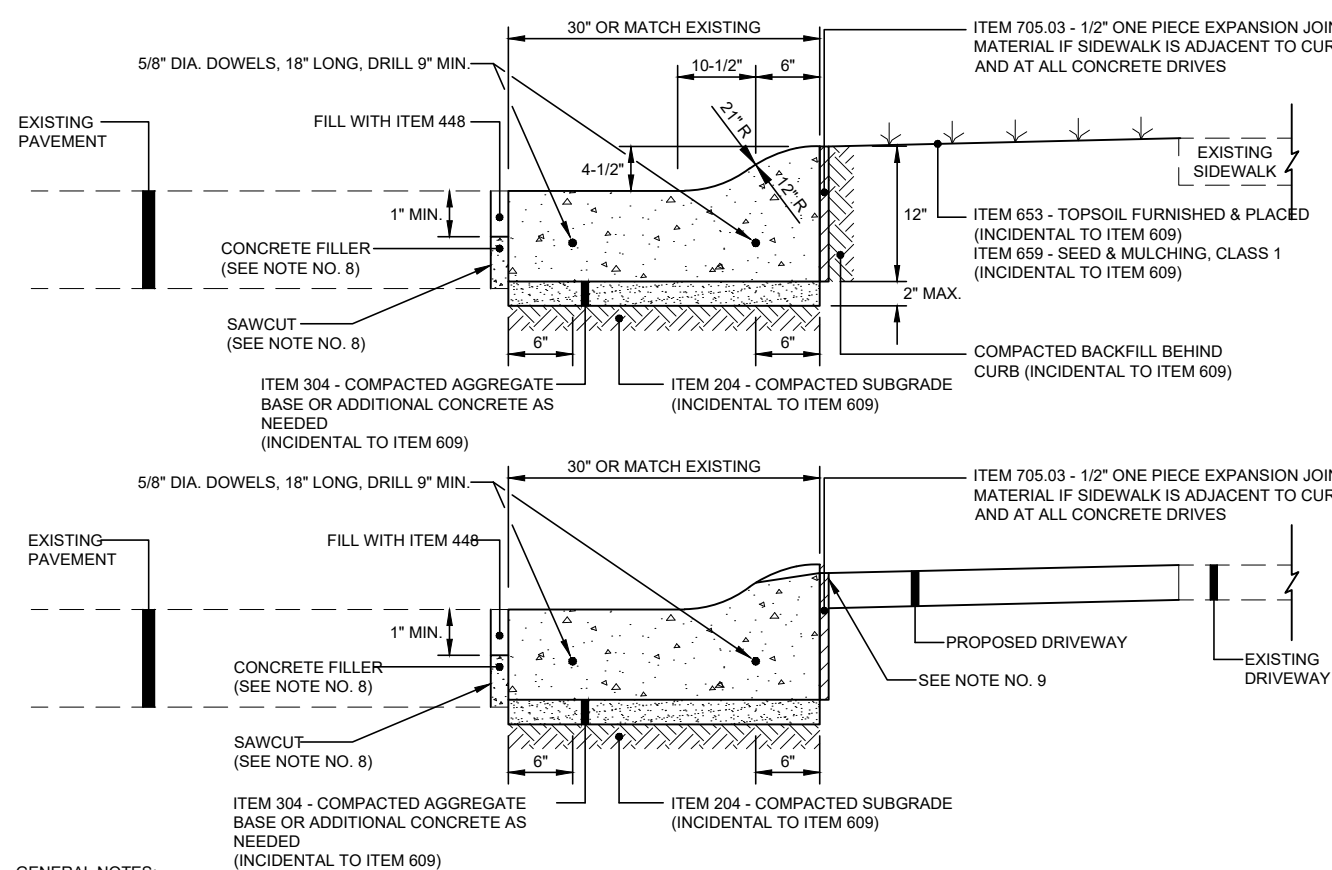


GENERAL NOTES:

- 1.) CONCRETE SHALL BE 4000 PSI @ 28 DAYS WITH 5% MIN. TO 8% MAX. ENTRAINED AIR.
- 2.) MAINTAIN SPACING OR EXISTING EXPANSION AND CONTRACTION JOINTS.
- 3.) THE COST OF ANY REQUIRED YARD RESTORATION WHICH WOULD INCLUDE TOPSOIL AND/OR SEEDING AND MULCHING SHALL BE INCIDENTAL TO ITEM 609. CONCRETE CURB AND GUTTER, REMOVE AND REPLACE.
- 4.) THE MIN. CURB AND GUTTER REPLACEMENT SHALL BE 3'-0" WITH EXPANSION MATERIAL AND DOWELS PLACED ON AT LEAST ONE END OF THE REPAIRED SECTION.

CURB AND GUTTER

N.T.S.

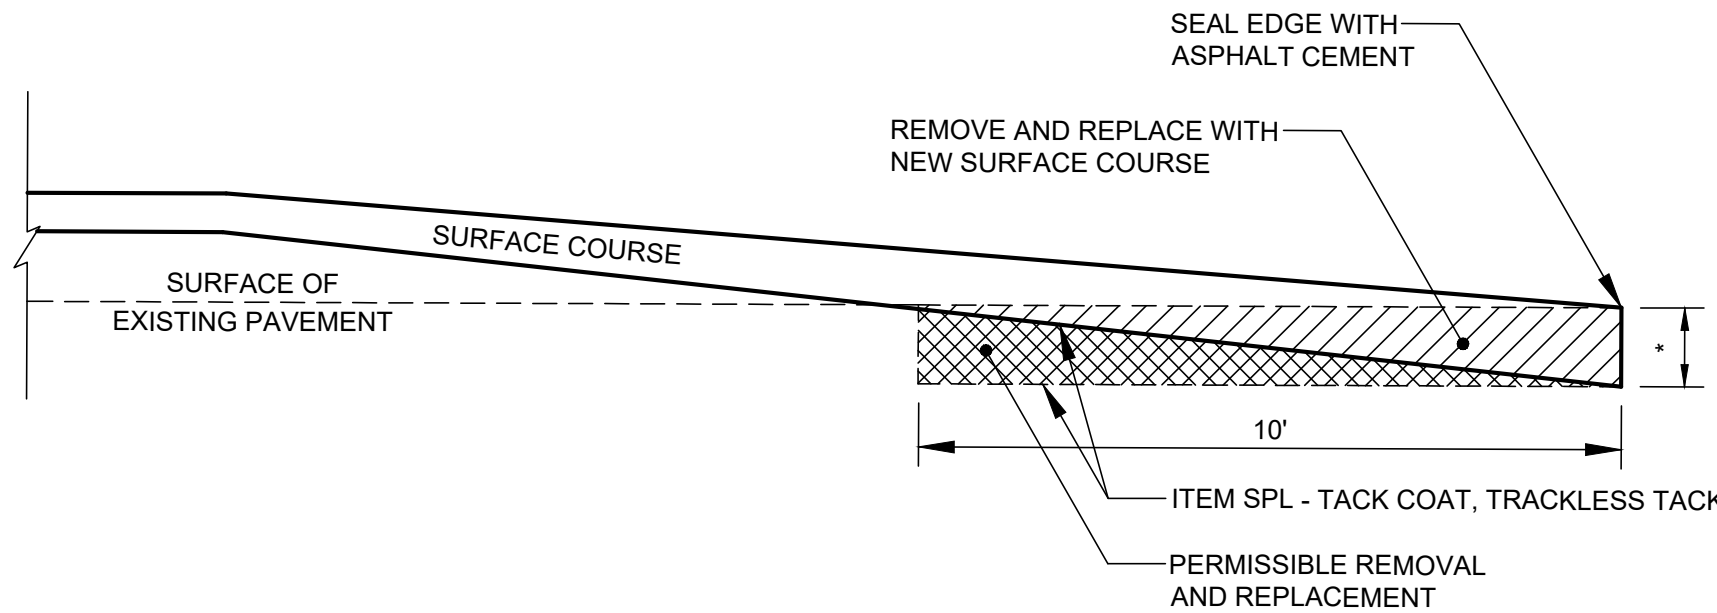

- * REFER TO TYPICAL SECTION FOR PLANING DEPTHS.
* BUTT JOINT INCIDENTAL TO ASPHALT SURFACE COURSE.

ITEM 254 - PAVEMENT PLANING, ASPHALT CONCRETE

TYPICAL BUTT JOINT DETAIL

N.T.S.

verdantas

DATE	REVISION	NO	ISSUED FOR:	XX%	REVIEW	03/10/25	AS SHOWN	AJAC	AJAC	EMOR

FOREST PARK STREET PROGRAM

2025
FOREST PARK, OHIO

DETAIL

PROJECT NO. 250070	
DISCIPLINE CIVIL	
SHEET NAME DET	
SHEET 8	OF 8